


V-5300, V-2500 and V-2300 Portable Visual Presenters

KEY FEATURES: Model V-5300


- 18X Power Optical Zoom + 4X Digital Zoom = up to 72X magnification.
- Precision AutoFocus and Power Manual Focus adjustment.
- Auto Iris with Manual Adjustment for optimum brightness.
- Highly sensitive camera & lens system: responsive down to 3 Lux.
- Room light is often sufficient for superb results with opaque material.
- Swing-Down Top Lighting enhances the reproduction of 3D objects.
- Built-In Backlight in base illuminates transparencies and slides.
- Folds-down in seconds to become truly portable. Built-in handle.

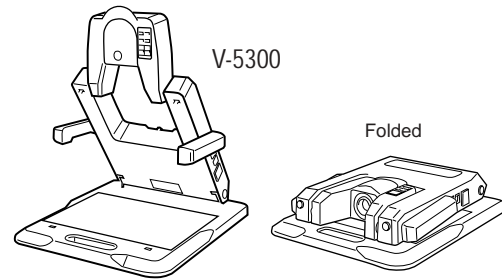

KEY FEATURES: Model V-2500

If subjects will be only flat opaque material, the V-2500 is an excellent choice. It offers the same camera and lens as the V-5300, without the cost of top and base lights. Plus:

- Manual override of Auto White Balance for Indoor and Outdoor settings.
- Both Normal 4:3 and Widescreen 16:9 aspect ratios.
- The picture can be Reversed (right/left).

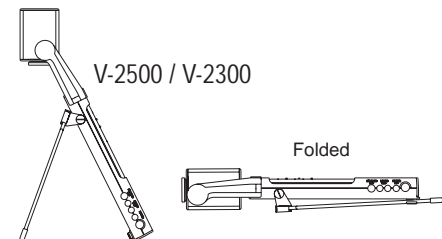

KEY FEATURES: Model V-2300

The V-2300 combines a simpler camera and lens, for a lower cost system.

- Even higher light sensitivity: responsive down to 1 Lux.

SPECIFICATIONS:

| | <u>V-5300</u> | <u>V-2500</u> | <u>V-2300</u> |
|-----------------------------|-----------------------------------|------------------------------------|------------------------------------|
| Optical Zoom Magnification | 18X | 18X | 12X |
| Digital Zoom Magnification | 4X | 4X | No |
| Maximum Stage Area (HxW) | 9.2 x 12.3 in. (232 x 312 mm) | 8.9 x 12.0 in (225 x 305 mm) | 9.3 x 12.6 in. (236 x 320 mm) |
| Minimum Stage Area (HxW) | 0.59 x 0.79 in. (15 x 20 mm) | 0.59 x 0.79 in. (15 x 20 mm) | 0.83 x 1.10 in. (21 x 28 mm) |
| Sensitivity | as low as 3 Lux | as low as 3 Lux | as low as 1 Lux |
| Lens Speed / Focal Length | f:1.4-3.0 / (4.1-73.8 mm) | f:1.4-3.0 / (4.1-73.8 mm) | f:1.8-2.7 / (5.4-64.8 mm) |
| Focus | Auto. One-Touch. Motor-Driven | Auto. One-Touch. Motor-Driven | Auto. One-Touch. Motor-Driven |
| Iris | Auto, with Manual Adjustment | Auto, with Manual Adjustment | Auto, with Manual Adjustment |
| Camera Type | 1/4 inch CCD | 1/4 inch CCD | 1/3 inch CCD |
| Total Pixels | 415,544 | 415,544 | 415,544 |
| Active Pixels | 390,393 | 390,393 | 390,393 |
| Synchronization | Internal | Internal | Internal |
| Horizontal Resolution | 470 TV Lines | 470 TV Lines | 460 TV Lines |
| Signal/Noise Ratio | more than 50 dB | more than 50 dB | more than 48 dB |
| White Balance | Auto | Auto / Indoor / Outdoor | Auto / Indoor / Outdoor |
| White/Black Mode | Selectable | Selectable | No |
| Detail Image Mode | Soft / Normal / Sharp | No | No |
| Negative-Positive Inversion | Yes | Yes | No |
| Freeze Function | Yes | Yes | No |
| Brightness Adjustment | Yes | Yes | Yes |
| Color Adjustment | Yes | Yes | Yes |
| Aspect Ratio (W:H) | 4:3 | 4:3 / 16:9 (selectable) | 4:3 |
| Left/Right Reversal | No | Yes | No |
| Top Lighting (Arms) | Fluorescent x 2 | No | No |
| Back Lighting (Base) | Yes | No | No |
| Video Output | C-Video (RCA) X 1; S-Video X 1 | C-Video (RCA) X 2; S-Video X 1 | C-Video (RCA) X 2; S-Video X 1 |
| Microphone Input | 1/4 inch Phone Jack x 1 | No | No |
| Audio Output | RCA x 1 | No | No |
| IR Remote Control | 15 Keys | 15 Keys | 9 Keys |
| Net Weight | 12.8 lb (5.8 kg) | 3.3 lb (1.5 kg) | 3.3 lb (1.5 kg) |
| Dimensions: Open (HxWxD) | 20.5x15.5x17.9 in (521x394x454mm) | 18.3x13.8x10.9 in (463x350x275 mm) | 18.3x13.8x10.9 in (463x350x275 mm) |
| Dimensions: Closed (HxWxD) | 4.2x15.5x17.9 in (106x394x454 mm) | 3.9x11.5x15.75 in (98x290x400 mm) | 3.9x11.5x15.75 in (98x290x400 mm) |
| Power Supply | Built-In: Detachable Power Cord | AC Adapter (DC 6.5V) | AC Adapter (DC 6.5V) |
| Power Requirements | 100-120 VAC, 50/60 HZ | 100-120 VAC, 50/60 HZ | 100-120 VAC, 50/60 HZ |
| Power Consumption | 16 W | 3.5 W | 3 W |
| Rotatable Head | Yes | Yes | Yes |
| Removable Close-up Lens | Yes | Yes | Yes |
| Warranty | 1 Year: Parts and Labor | 1 Year: Parts and Labor | 1 Year: Parts and Labor |

Specifications subject to change without notice. ©2001 Eiki International, Inc. Printed in the USA. November 21, 2001

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2130 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>