

N/D468 User Manual

Designed specifically for horns, drums, acoustical and electric guitars, the N/D468 provides a smooth, natural sound, capturing the excitement of the instrument. The supercardioid pattern provides superior rejection and acoustic isolation in any application. An innovative EV design harnesses the increased power of a neodymium based magnet design, allowing a large-diameter voice coil (up to 50% larger than other mics) for dynamic, efficient microphone performance. N/DYM® offers the power and clarity to “cut through the mix.” Whatever your instrument application the N/D468 is sure to be a top performer.

- Designed specifically for musical instruments
Flexible mechanical design for optimum positioning
- Supercardioid pattern for exceptional acoustic isolation and feedback rejection
- Accurate response, even in high sound pressure levels (SPL)
- Rugged steel construction for exceptional durability

Operation

The low frequency response of the N/D468 microphone varies with the distance from the sound source. Known as “proximity effect,” maximum bass response is produced in “close-up” use with the microphone ¼ inch from the sound source. Normal bass response is experienced with working distances greater than 24 inches. Working close to the microphone will produce a more robust sound. Close up positioning of the microphone will also reduce the potential for feedback from the sound reinforcement system. When close-miced, the bass-boost provides an increase in overall microphone output level. The mixer gain may be proportionately reduced, resulting in a reduction of the system’s sensitivity to feedback caused by sound entering the microphone from the loudspeakers.

Microphone Use and Placement

Please note that micing techniques are a matter of personal preference. These are merely guidelines to assist in the placement of the microphone to gain optimal performance.

Usage	Optimal Placement
Electric Guitar and Bass Guitar Amplifier	Place microphone approximately 1-2” from and at a 90° degree angle to the speaker cone. To reduce boominess, move the microphone off axis to the cone from 90° to 45°, or move mic from center of cone to either edge.
Tom-Toms	On double headed Toms place mic over the top of drum 1-3” and at a 45° angle to the drum surface and 1-2” in from the drum edge. On single headed Toms use above method or place mic inside Tom from underneath at a 90° angle from the center of head, 3-5” away.
Snare Drum	Place mic 1-3” above the heads, 1-2” in from the rim. Aim each mic at the top heads angled down about 45°. If the drum rings, tape deadening material to the head or use damping rings. For more “snare” sound place a 2nd mic underneath aimed up at the bottom of head.
Cymbals	Place microphone one to two feet above the top of cymbals.
High-Hat	Place 5 inches above outside edge at a 45° down angle.
Brass	6-24” away, and on axis with the bell of the instrument.
Acoustic Guitar	Place mic 6-12” from where finger board joins the body.

Standard Placement & Use Guidelines

1. Always point the microphone at the desired source of sound, and away from any unwanted sources.
2. The microphone should be located close to the sound source to minimize interference from other potential sound sources.
3. Use the 3-to-1 rule when using multiple microphones. Place each microphone three times farther from other microphones as from the desired sound source.
4. Minimize over-handling of the microphone to reduce unwanted mechanical noise
5. Working close to the microphone will increase the bass tone and also provide increased gain-before-feedback.


Warranty

This product is guaranteed against malfunction from any cause for two (2) years from the date of original purchase. In addition, the Limited Warranty for the acoustic system contained in the microphone shall apply for the life of this product, defines as a period of ten (10) years from the date that the manufacture of this microphone model has been discontinued. Any and all active electronics incorporated in this microphone are guaranteed against malfunction due to material workmanship for a period of three (3) years from the date of original purchase. This Limited Warranty does not extend to cables, connectors, or switches.

For warranty service please call us at:


616-695-6831 or

1-800-234-6831

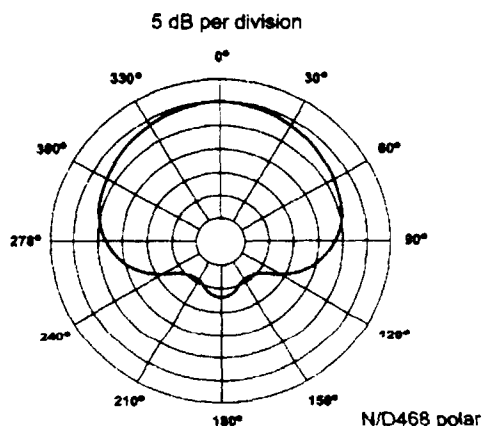

N/D468 Specifications

Element:	Dynamic, N/DYM® magnet structure
Frequency Response:	
Close Response:	30-22,000 Hz
Far Response:	60-22,000 Hz
Polar Pattern:	Supercardioid
Impedance:	150 ohms balanced (low-Z)
Sensitivity:	
Open Circuit Voltage:	3.1 mV/Pascal @ 1 kHz
Power Level: . (0 dB=1mW/pascal) -	51 dB @1 kHz
Microphone Connector	3-pin, XLR-type
Equivalent Output Noise	14 dB A weighted (0 dB= 0.00002 pascal)
Polarity:	Positive pressure on diaphragm causes Positive voltage on pin 2 ref. Pin 3
Finish:	Non-reflecting black
Materials:	
Grille screen	Memraflex™
Dimensions:	
Length	@ 4.5 in. (115 mm)
Diameter	@ 2.05 in. (52 mm)
Shank	@ 0.80 in. (20mm)
Weight:	
Net	@ 6.7 oz (190 grams)
Shipping	@ 16 oz (453 grams)
Accessories included:	
311 stand clamp	
Soft zippered 'gig' bag	

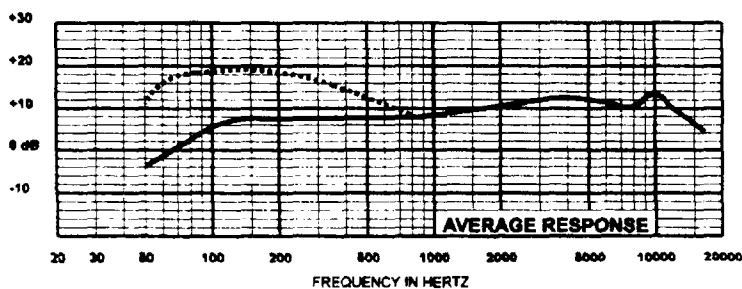

EVERYWHERE™

USA 8800Atrich Ave. S., Minneapolis, MN 55420 Phone: 612/894-4051 FAX: 612/894-0043
 Canada 705 Progress Avenue, Unit 10, Scarborough, Ontario, Canada, M1H 2X1 Phone: 416-431-4875 FAX: 416-431-4568
 Switzerland Kohnstrasse 1, CH-7060 Pöschach, Switzerland Phone: 011-41-72-331-4633 FAX: 011-41-72-331-1221
 Germany Hirschbergpark 46, 89430 Zingst, Germany Phone: 011-49-4421-7062 FAX: 011-49-4421-706205
 France Parc de Courcouronnes, Alfort-sur-Yvette, France, 91121 Evry-Courcouronnes Phone: 011-33-1-6480-0088 FAX: 011-33-1-6008-5100
 Australia Unit 23, Blough Business Centre, Blough Road, S.M. 2128 Australia Phone: 011-61-2-9648-3488 FAX: 011-61-2-9644-5585
 HongKong Unit 8/F, 21/E, Lau Hai Industrial Building, 8 Lau Hai St., Seng Fong, NewKow, HongKong Phone: 011-852-2351-9822 FAX: 011-852-2351-3320
 Japan 2-8-80 Kami, Sapporo-ku, Tokyo, Japan 108 Phone: 011-81-3-5325-7800 FAX: 011-81-3-5325-7788
 Singapore Telex Comm Pte Ltd, 3015 Jalan PM 1, #05-10A Empress Industrial Estate, Singapore 408706 Phone: 011-86-746-8700 FAX: 011-86-746-1208
 Mexico Tecnología Especializada EDO S.A. de C.V., Av. Parroquia de San Mateo 201, E.P. en Av. Neocatepan, Mexico, DF 53380 Phone: 011-52-5358-5434 FAX: 011-52-5358-5586

N/D468 response

Part Number 535835

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>