



EV9799-05

SWS-10 Sediment Filter Wrap

Adds sediment filtration capabilities to Wrap ScaleStick®, which provides scale and corrosion control



SWS-10 Sediment Filter Wrap:
EV9799-05

SSW-10 Wrap ScaleStick:
EV9799-04

BENEFITS

Features Hydroblend™ compound, a unique blend that inhibits mineral scale deposits and provides corrosion protection in low flow water-fed equipment

Patented design (patent no. 5,580,448) dispenses a controlled amount of Hydroblend™ for long-term protection and provides greater effectiveness than standard phosphate treatments

Unaffected by high temperatures, permitting a wide variety of applications

Integral feed cartridge fits standard 10" housings

Translucent cartridge allows simple visual monitoring of product usage and ensures against wasteful premature cartridge replacement

Wrap ScaleStick® (SSW-10) is specially designed to be used with a sediment filter wrap (SWS-10) to combine sediment filtration and scale control. The SWS-10 is designed to fit over and around the Wrap ScaleStick® and is sold separately

Also available: CWS-10 Carbon Block Filter Wrap EV9799-06

INSTALLATION TIPS

Housing not included. Order Model A-10 Clear 10" Housing (EV9100-01) separately for temperatures less than 125 °F

Make sure selected housing fits temperature/pressure conditions

Install vertically with black o-band seal up

Wrap ScaleStick® cartridges are shorter than standard ScaleStick® cartridges and do not have the o-band seal. They cannot be installed without the special filter wraps. Standard ScaleStick® cartridges cannot be installed into filter wraps

OPERATION TIPS

Deliming of equipment prior to application is recommended, but not required

Inspect ScaleStick® cartridges at least every 6 months

Replace ScaleStick® before Hydroblend™ compound is completely dissolved

Pre-existing equipment scale may come loose and clog equipment. Remove any loose scale to assure satisfactory operation

APPLICATION/SIZING

For water-using equipment:

- Steamers and Combi-ovens
- Ice Machines
- Coffee and Espresso Machines
- Proofers

SWS-10 Sediment Filter Wrap

SPECIFICATIONS

Dimensions:

Filter Wrap:

7-11/16" H x 2-13/16" Diameter

Wrap ScaleStick SSW-10:

9-9/16" x 1-5/16" Diameter

Service Flow Rate:

0.1 - 6 gpm


Maximum Temperature:

150°F*

*If inlet feed water temperature is above 125°F a hot water housing must be used.

Note: Filter Wraps are not to be used in hot water feed applications.

**The ScaleStick® trademark is used pursuant to an agreement between PWC Enterprises and Everpure, Inc.

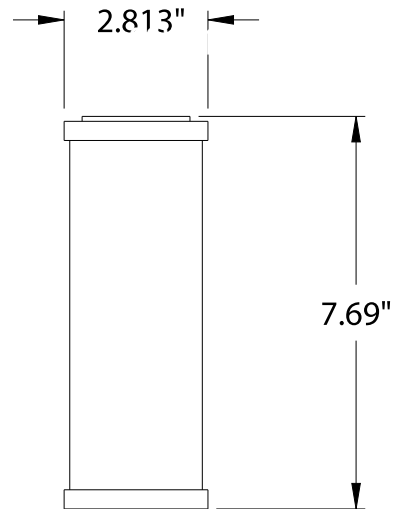

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

EVERPURE®

Worldwide Headquarters:

EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:

Pentair Water Belgium B.V./B.A.
Industriepark Wolfstee
Toekomstlaan 30
B- 2200 Herentals
BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505

In Japan:

Hashimoto MN Bldg. 7F
3-25-1 Hashimoto Sagamihara-Shi
Kanagawa 229-1103
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>