



Fujitsu P C Corporation




Serial Adapter (DB9) Installation Guide


FMW43SA1

For use with Stylistic™ LT Pen Tablet PCs

I N S T R U C T I O N S






The serial adapter allows you to connect a serial device directly to your pen tablet without a docking device. The port is a fully functional RS-232C serial port that can be used as a standard serial port on your pen tablet.



On one side of the adapter is a plug which fits into the system interface port (*see Figure 1*). On the opposite side of the adapter is a 9-pin port for a serial connector (*see Figure 2*).

To install the adapter,

1. If the pen tablet is running, either suspend operation or power down the system.
2. If the serial device you wish to connect has power applied, remove power.







3. Remove the plastic cover that is located over the system interface port on the bottom edge of the pen tablet. Keep the cover in a safe place for future reinstallation.
4. Plug the serial adapter into the system interface port. The plug is keyed so that it will only fit when it is positioned properly (see Figure 3).
5. Insert the serial plug into the serial connector (see Figure 2).
6. Restart the system and the serial device.


To remove the adapter,

1. If the pen tablet is running, either suspend operation or power down the system.
2. If the serial device you wish to disconnect has power applied, remove power.
3. Pull the plug from the connector. Replace the plastic cover over the system interface port.
4. Restart your system.

Note: When the serial adapter is attached to the pen tablet, the tablet cannot be used in the compact desk stand because the connector/cable assembly extends too far from the bottom of the system. The system should be held or laid flat when the serial adapter is installed.



2



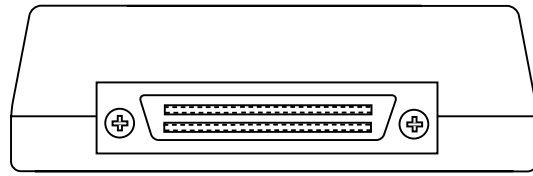


Figure 1. System Interface Connector Side

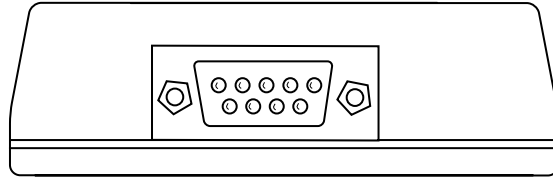


Figure 2. Serial Connector Side




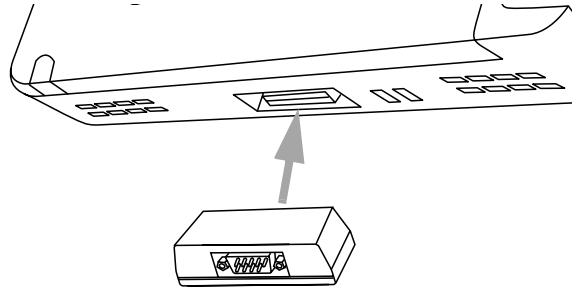


Figure 3. Installing the Serial Adapter



5200 Patrick Henry Drive
Santa Clara, CA 95054

For more information, visit our Web site
at: www.fujitsu.com


For technical support call:
1-800-8Fujitsu (1-800-838-5487)

or e-mail us at: 8fujitsu@fujitsu.com

Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu, Ltd. Stylistic is a trademark of Fujitsu PC Corporation. All other trademarks mentioned herein are the property of their respective owners. We cannot guarantee the accuracy of the contents of this document. We disclaim liability for errors, omissions or future changes.

© 2001 Fujitsu PC Corporation. All rights reserved.

FPC58-0616-01
B5FY-1751-01EN-00



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>