

# 24V DRIVE, ULTRA HIGH SPEED LINE THERMAL PRINTER 2" MECHANISM, WITH AVAILABLE CUTTER

## FTP-621MCL351/352

### ■ OVERVIEW


This thermal printer (driven by 24 VDC) and cutter provide high speed printing for 2-inch wide paper (60 mm). This printer is small in size, light weight, and has low power consumption. The print head is designed with open construction for easy maintenance.

This printer is suitable for a variety of applications, such as POS terminals, ticket machines, label printers, measuring devices and medical equipment.


In addition to the interface board, a driving LSI (MCU + Gate Array) is also available.

### ■ HIGHLIGHTS


- **Ultra high speed printing**  
It can print at 100 mm/s (800 dotlines/s) by using Fujitsu Components' unique head drive control system.
- **Auto cutter**  
Full or partial cutting are available by normal or reverse rotation of the motor (command set).
- **Low power consumption**  
The peak current for head driving is approximately 2.2 A (at 50 mm/s printing speed, 50% printing ratio).
- **Easy head access**  
Open head construction makes head maintenance easy, especially for head cleaning.
- **Paper auto loading function**  
The thermal paper can be loaded without head-up lever operation.
- **High resolution**  
8 dots/mm head provide clear print output.
- **Selectable paper paths**  
Front or rear insertion types are available.



**FTP-621MCL351/352 shown after assembly with FTP-621CT001cutter**



**FTP-621CU102, FTP-633GA101**



**FTP-621DCL013**

## ■ DESIGNATION

Item		Part number
Printer mechanism	Front paper insertion type	FTP-621MCL351
	Rear paper insertion type	FTP-621MCL352
Cutter		FTP-621CT001
Interface board		FTP-621DCL013
LSI	Micro Controller Unit	FTP-621CU102
	Gate Array	FTP-633GA101

## ■ GENERAL SPECIFICATIONS

Item	Specifications	
Printing method	Thermal-sensitive line dot method	
Dot structure	432 dots/line	
Dot pitch (Horizontal)	0.125 mm (8 dots/mm)—Dot density	
Dot pitch (Vertical)	0.125 mm (8 dots/mm)—Line feed pitch	
Effective printing area	54 mm	
Number of columns	36 columns/line (maximum)—Alphanumeric KANA	
Maximum printing speed	800 dotlines/s (100 mm/s) maximum	
Character types	JIS ANK : 128    International characters : 130 Semi-graphic : 63    ASCII small characters : 31 Download : 384	
Character composition, dimensions (H×W), Number of columns (standard)	24 × 12 dots, (3.0 × 1.5 mm), 36 columns 32 × 16 dots, (4.0 × 2.0 mm), 27 columns 24 × 24 dots, (3.0 × 3.0 mm), 18 columns 32 × 32 dots, (4.0 × 4.0 mm), 13 columns	
Interface	1) Centronics standard    2) Bus interface*1	
Cutter	Cutting method	Guillotine method
	Cutting type	Full-cut or partial cut (command set)
	Minimum cut length	20 mm
	Paper thickness	65 to 150 μm

(Continued)

(Continued)

Item		Specifications
Power supply	For head	24 V DC $\pm$ 5%, average:* <sup>2</sup> 0.41 (0.56) A (at 25 mm/s printing speed, 25% printing ratio) 0.63 (1.11) A (at 50 mm/s printing speed, 25% printing ratio) 1.23 (1.65) A (at 100 mm/s printing speed, 25% printing ratio) ( ): Peak
	For motor	24 VDC $\pm$ 5%, 1.0 A maximum
	For logic	5 VDC $\pm$ 5%, 0.5 A maximum
Weight		Mechanism with cutter: approx. 450 g. Interface board: approx. 100 g
Dimensions	Mechanism + cutter	107 (W) $\times$ 60 (D) $\times$ 71.0 (H) mm (excluding connector)
	Interface board	140 (W) $\times$ 89 (D) $\times$ 24.0 (H) mm
Life	Thermal head	Pulse durability : $5 \times 10^7$ pulse/dot (using Fujitsu Takamisawa's standard driving method) Wear resistance : 50 km (at 12.5% printing ratio)
	Cutter	Cutting life: $3 \times 10^5$ times
Environmental conditions	Operating temperature	+5 to +40°C* <sup>3</sup>
	Operating humidity	20 to 85% RH (no condensation)
	Storage temperature	-20 to +60°C (excluding paper)
	Storage humidity	5 to 95% RH (no condensation)
Detection	Head temperature	By thermistor (applied energy control, abnormal temperature detection)
	Paper out/Mark detect	By photointerrupter (command set)
	Head-up	By microswitch
Paper width		60 $^{+0}_{-1}$ mm
Recommended thermal sensitive paper* <sup>4</sup>		1 ply paper in roll: FTP-020P0020

\*1: The data to be printed is automatically read out by the printer driver equipment memory (host system frame memory). The communication is parameter transfer.


\*2: At 25°C, maximum applied voltage, minimum head resistance, specified paper, stable printing ratio.

\*3: Temperature range for guaranteed printing density. It can operate at 0 to +40°C.



\*4: Please contact us for other thermal papers.

## ■ DIMENSIONS

### Printer mechanism with cutter

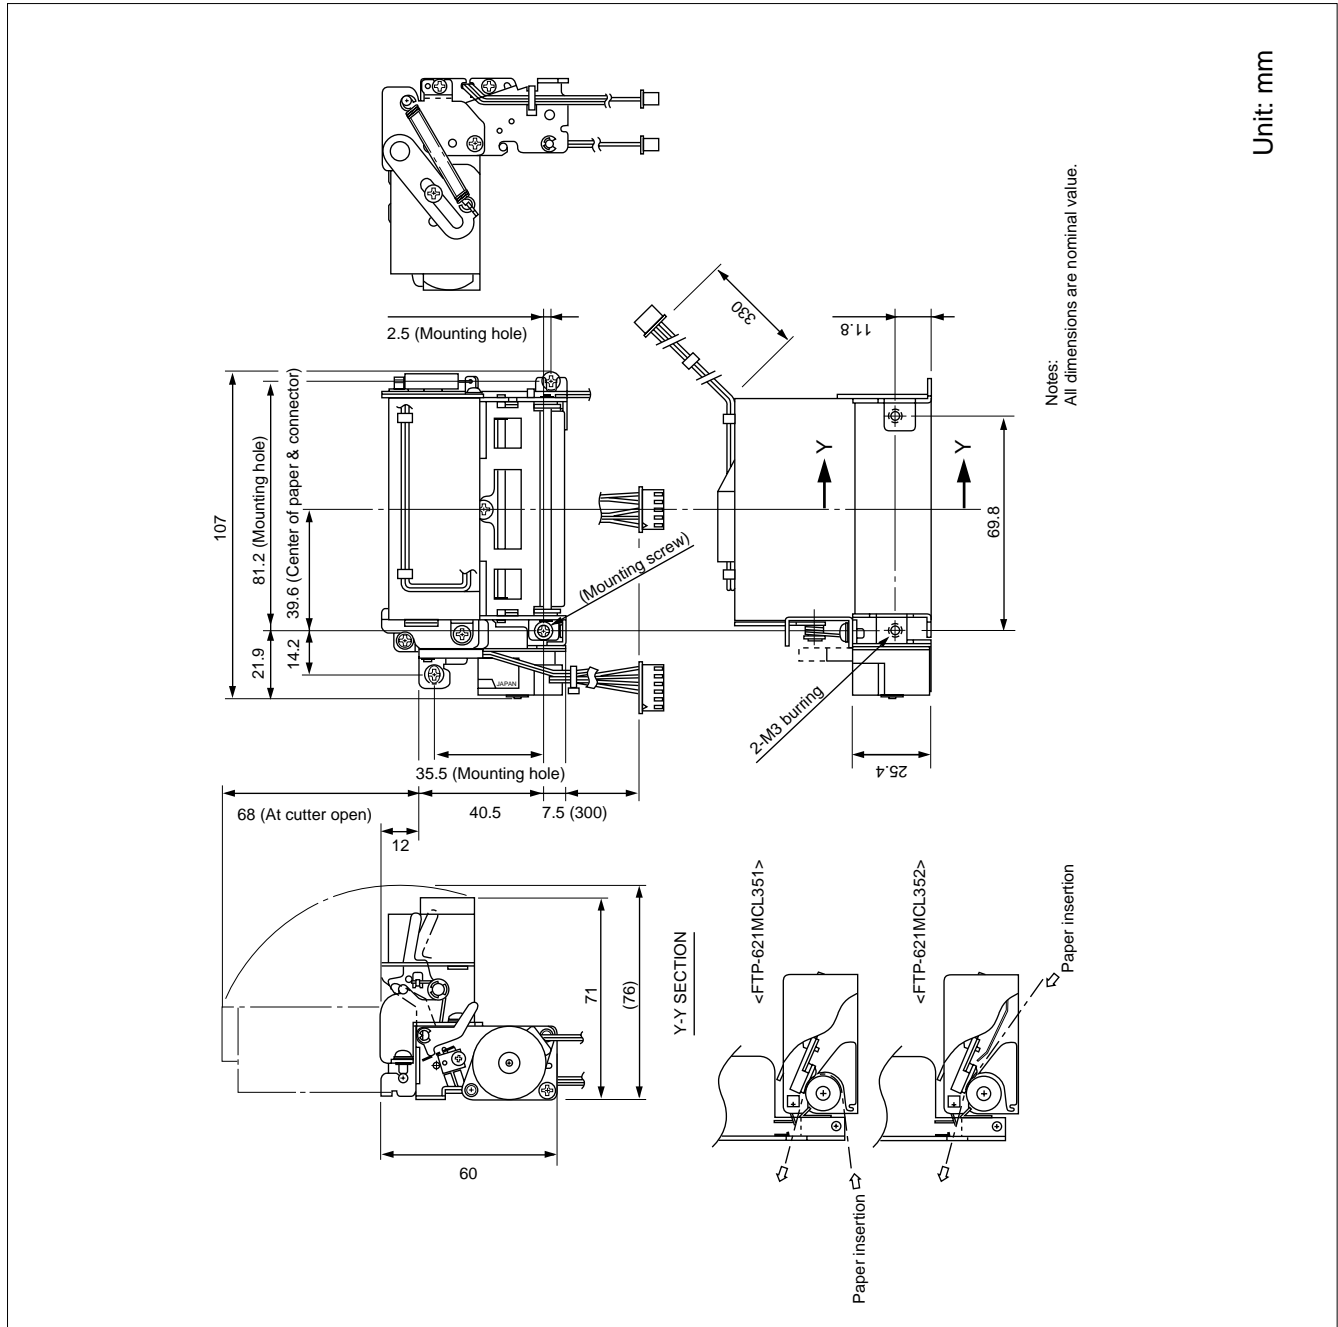

## Interface board

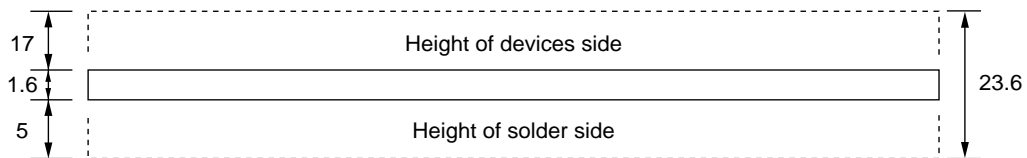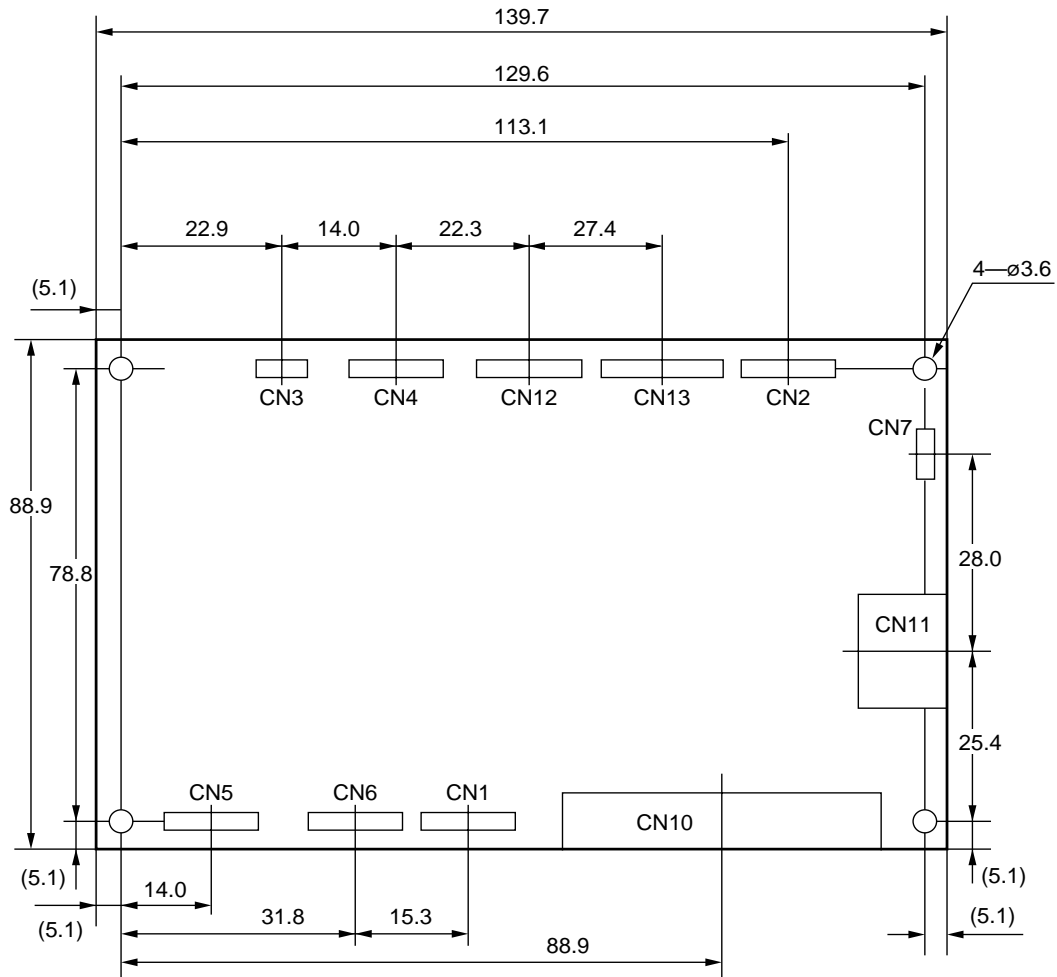

Unit: mm

### ■ INTERFACE, COMMAND, OPTIONS

Please refer to the FTP-621DCL003/013 DATA SHEET for Interface, Command, and Options.

## **Fujitsu Components International Headquarter Offices**

### **Japan**

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### **North and South America**

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [marcom@fcai.fujitsu.com](mailto:marcom@fcai.fujitsu.com)  
Web: [www.fcai.fujitsu.com](http://www.fcai.fujitsu.com)

### **Europe**

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info.marketing@fceu.fujitsu.com](mailto:info.marketing@fceu.fujitsu.com)  
Web: [www.fceu.fujitsu.com](http://www.fceu.fujitsu.com)

### **Asia Pacific**

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 375-8560  
Fax: (65) 273-3021  
Email: [fcac@fcal.fujitsu.com](mailto:fcac@fcal.fujitsu.com)  
[www.fcal.fujitsu.com](http://www.fcal.fujitsu.com)

© 2001 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 09/2001

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>