


HP

Digital Sender

8100C

Administrator
Guide





HP Digital Sender 8100C

Administrator Guide _____

Copyright information

© Copyright Hewlett-Packard Company 2000

All rights reserved.

Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under copyright laws.

Publication number
C7707-90006

First Edition, April 1, 2000

Trademark credits

Adobe, the Adobe logo, Acrobat, the Acrobat logo, Adobe Circulate, and the Adobe Circulate logo are trademarks of Adobe Systems Incorporated. CompuServe is a U.S. trademark of CompuServe, Inc. Microsoft, Windows, and Windows NT are U.S. registered trademarks of Microsoft Corporation. Pentium is a U.S. registered product of Intel Corporation.

LDAP code (libldap client library and liblber encoding/decoding library) used courtesy of University of Michigan at Ann Arbor. Copyright 1992-1999 Regents of the University of Michigan. All rights reserved.

All other products mentioned herein may be trademarks of their respective companies.

Warranty

The information contained in this document is subject to change without notice.

Hewlett-Packard makes no warranty of any kind with respect to this information. HEWLETT-PACKARD SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Hewlett-Packard shall not be liable for any direct, indirect, incidental, consequential, or other damage alleged in connection with the furnishing or use of this information.

NOTICE TO U.S. GOVERNMENT USERS: RESTRICTED RIGHTS COMMERCIAL COMPUTER SOFTWARE: "Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data Clause at DFARS 52.227-7013."

Material scanned by this product may be protected by governmental laws and other regulations, such as copyright laws. The customer is solely responsible for complying with all such laws and regulations.

Safety information

WARNING!

Electrical shock hazard

To avoid electrical shock, use only supplied power cords and connect only to properly grounded (3-hole) wall outlets.

Contents

1 About the digital sender

Introduction	5
Environments and protocols	6
Network operating systems	6
Dependency matrix	6
Features	7
Performance	7
Paper handling	7
Sending quality	8
Distribution services	9
Security	11
Components	12
Hardware components	12

2 Installing the digital sender

Installation process	15
The configuration process	16
E-Mail, I-Fax, and HP JetSend configuration	16
Extended and optional functionality	16
Assigning an IP address to the digital sender	17
Preparing for configuration	17
Configure e-mail parameters	20
Configure I-fax parameters	21
Configure extended and optional parameters	22
Test the installation	24
HP Web JetAdmin	24

3 Administering

Summary of administrator activities	25
Configuration menu parameters	26
Controlling security	30
Changing or setting administrator password	30
Erasing administrator password	30
Determining who can use the digital sender	31
Obtaining status and activity information	32
Job(s) state	32
Revision page	33
Tasks	35
Notification of e-mail delivery	36

Administrator tools.....	36
Shutting down and restarting	36
Resetting to factory defaults.....	37
Checking the address book database	38
Clearing the data base.....	39
B/W Contrast	40
Creating and maintaining user profiles.....	41
Working with address books	43
Maintaining the Public Lists address book	44
Maintaining the Public E-mail address book	46
Maintaining user lists and addresses.....	47
Maintaining fax lists and numbers.....	47
Changing the contrast level of the LCD	47
Upgrading the digital sender firmware	48
Backing up and restoring the digital sender.....	49
Backing up the digital sender.....	49
Restoring the digital sender	50
Cleaning the digital sender.....	51
Digital Sender glass.....	51
ADF	52

4 Troubleshooting

Sources for information about problems	55
Troubleshooting the digital sender	56
General digital sender troubleshooting	56
Control panel messages	56
Troubleshooting network problems.....	62
Network interface card troubleshooting	62

5 Warranty and support information

Hewlett-Packard limited warranty statement	63
Hewlett-Packard Year 2000 warranty.....	65
Replacement parts and accessories	66
HP customer support options worldwide.....	67
HP support.....	69

Appendix A Specifications

Equipment specifications.....	71
Environmental ranges	73
Supported capabilities	74
Declarations of Conformity.....	75
German noise declaration	77

Index

1 About the digital sender

Introduction

The HP Digital Sender 8100C can be directly connected to TCP/IP networks. It converts black-and-white and color documents, drawings, and photographs into electronic format and distributes them directly to several types of destinations:

- e-mail addresses
- fax numbers
- HP JetSend-enabled printers

The unit includes a flatbed scanner and an automatic document feeder (ADF) that can accept up to 25 pages.

Registered users can create their own address books of e-mail addresses and combine e-mail addresses into personal distribution lists. Users can also add fax numbers to public phone books. The destinations and distribution lists can then be selected at the digital sender control panel.

The administrator has the ability to create public e-mail destinations and distribution lists and make them available to all users.

The HP Digital Sender 8100C supports LDAP (Lightweight Directory Access Protocol), which allows you to find and use e-mail addresses located on directory servers located elsewhere on a network (such as the Internet) over a TCP/IP connection. See the HP digital sender website for a list of global e-mail address books:

<http://www.digitalsender.hp.com>

Installing the digital sender is simply a matter of making a few connections and configuring a few network and e-mail parameters. The digital sender operates as a stand-alone unit and does not require network privileges to administer.

The HP JetDirect print server (network interface card) that comes installed in the digital sender handles all protocol support for TCP/IP and SMTP automatically.

Environments and protocols

Network operating systems

The HP Digital Sender 8100C must be directly connected to TCP/IP network. A 10Base-T ethernet connection is provided by the network interface card that comes installed in the digital sender.

Dependency matrix

The following table shows the HP Digital Sender 8100C services that are available and their dependencies.

Dependency matrix

Service	Dependencies
Send to e-mail	An e-mail SMTP-MIME server directly connected to a TCP/IP network that can be reached from the digital sender (not a dial-up connection).
Send to Internet fax	An e-mail SMTP-MIME server directly connected to a TCP/IP network that can be reached from the digital sender (not a dial-up connection), and an account with an Internet fax provider.
Send to an HP JetSend-enabled printer	A HP JetSend-enabled printer connected to the network.

Features

Performance

For maximum scanning speeds, see [“Equipment specifications” on page 71](#).

Paper handling

The HP Digital Sender 8100C supports multiple paper sizes:

- Letter: 215.9 by 279 mm (8.5 by 11 inches)
- A4: 210 by 297 mm (8.3 by 11.7 inches)
- Legal (from the ADF only): 215.9 by 355.6 mm (8.5 by 14 inches)

Paper weight: 60 to 105 g/m² (16 to 28 lb.).

Up to 25 sheets of letter, A4, or legal paper can be stacked in the ADF (maximum height of 3 mm, or 0.1 inches).

ADF paper sizes

Item	Width	Length
Maximum paper size	215.9 mm (8.5 inches)	355.6 mm (14 inches)
Minimum paper size	148.5 mm (5.9 inches)	210 mm (8.3 inches)

Sending quality

The digital sender offers a choice of sending qualities at the control panel. You can choose the most suitable quality for each type of job.

Sending qualities and destinations

Sending quality	Type of document	Destinations
B/W Document	The original contains text that must be clearly transmitted. -Or- The original is black and white.	E-mail Fax HP JetSend printer
Color Document	The original has a mix of text and images. -Or- The original has a mix of color and black-and-white areas.	E-mail HP JetSend printer
Color-B/W Photo	The original is a photograph. -Or- The colors or shades of gray in an image must be transmitted clearly.	E-mail HP JetSend printer

Distribution services

The digital sender is capable of distributing documents to the following types of destinations:

- e-mail addresses
- fax phone numbers (via fax Internet service)
- HP JetSend-enabled printers

E-mail destinations

The digital sender can send MIME-compliant e-mail messages to Internet addresses. It uses SMTP-MIME to deliver these messages. SMTP is independent of the network operating system on which your e-mail server is running. The e-mail service is also compatible with the DSN (Delivery Status Notification) standard.

ESMTP (Extended SMTP) is used if your server supports it. This capability is automatically detected and configurable.

The document scanned at the digital sender becomes an attachment to your e-mail message. Portable Document Format (.pdf) is the file format most often used for the attachments, which gives recipients the ability to both view and print them. You can obtain a free copy of the Adobe® Acrobat® Reader from the Adobe Systems Incorporated website (<http://www.adobe.com>).

Documents can also be scanned as TIFF (.tif), a graphics format importable into most imaging and word processing programs. Text scanned in B/W Document sending quality can also be read by OCR programs.

Users can specify e-mail destinations at the control panel in several ways:

- Select e-mail addresses from public or personal address books already loaded in the digital sender.
- Use a special search feature to select e-mail addresses from an LDAP (Lightweight Directory Access Protocol) server, if one has been configured for use by the administrator.
- Type e-mail addresses manually.

Internet fax destinations

Users can send faxes directly from the digital sender. They have the ability to select destinations from a fax numbers book already loaded in the digital sender, or type them at the control panel. The same document can be sent to multiple fax numbers.

Sending faxes with the digital sender requires an account with a supported Internet fax provider. Visit the HP digital sender website (<http://www.digitalsender.hp.com>) for a list of the Internet fax providers that are currently supported.

HP JetSend-enabled printer destinations

You can enable send to printer by setting up one or more HP JetSend-enabled printers on the network for use with the digital sender. The printers you designate must be HP JetSend-enabled, connected to the network, and have a valid TCP/IP address. See the HP JetSend website (<http://www.jetsend.com>) for a list of HP JetSend-enabled printers.

Security

The HP Digital Sender 8100C operates as a stand-alone unit on the network. You administer each digital sender independently of any other device on the network under a password that applies only to that digital sender.

The digital sender accepts three types of users:

- **registered users**
Individuals who have created their own user profile on the digital sender. Only registered users have personal e-mail address books and lists that are accessible at the digital sender.
- **guest users**
Individuals who are not registered users and who do not have user profiles. Guest users can use the digital sender and all public address books. However, they cannot see or use personal address books. The administrator can disable guest user access.
- **administrator for the digital sender**
The individual (referred to as the “administrator” in this guide) who performs administrator activities for the digital sender. Because the digital sender is a stand-alone unit on the network, these activities can be performed independently of any other network activity. Network administrator privileges for the digital sender do not require network privileges. Activities include such things as establishing the level of security for the digital sender and maintaining the public address books. The administrator has access to all personal address books.

The administrator controls digital sender security in these ways:


- Determining who can use the digital sender (registered users and guest users, or only registered users).
- Requiring passwords. Passwords are available at two levels: administrator and registered users. Both are optional. Passwords control what each type of user can see and do at the digital sender.
- Enabling or disabling self-registration for users. If disabled, only the administrator can add or modify user profiles.

Components


Hardware components

The following illustrations show the digital sender hardware components.


Front and top view

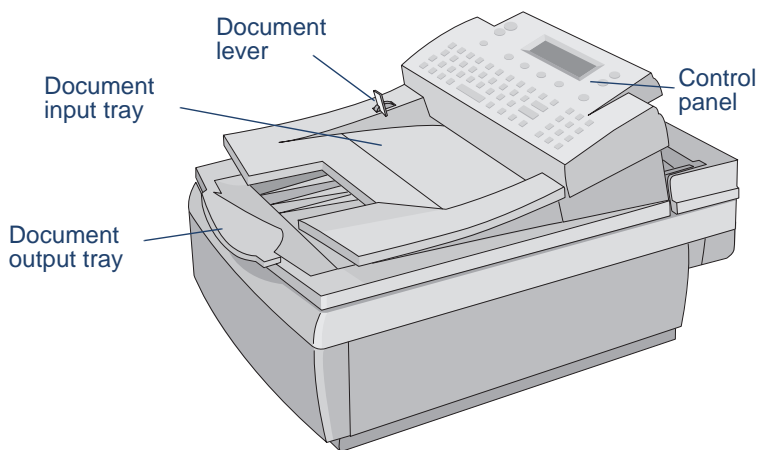

Front view with ADF unit raised

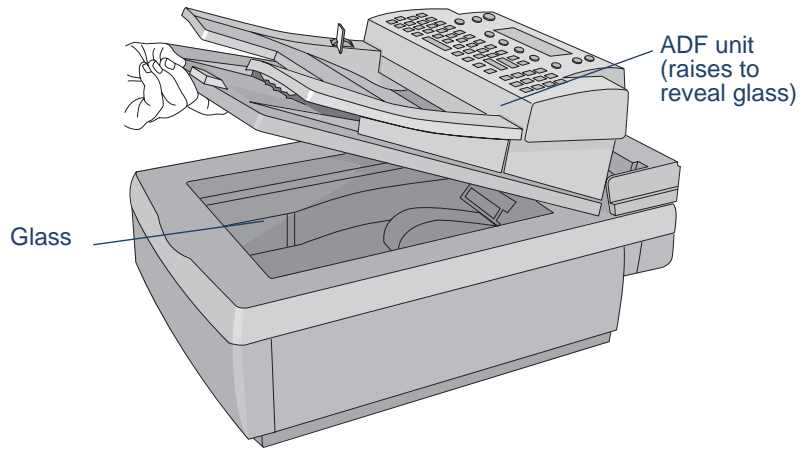

Rear view

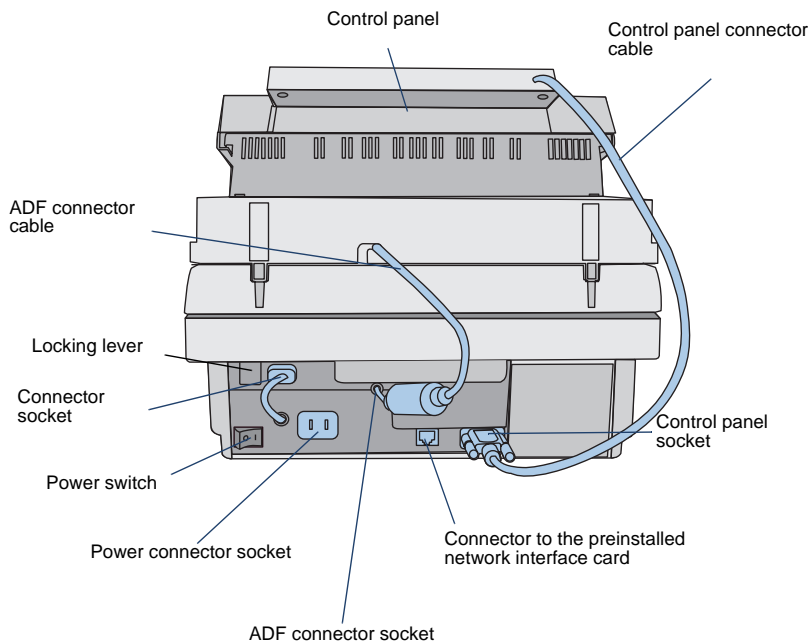

2 Installing the digital sender

Installation process

See the Welcome Poster for installation and initial setup of the HP Digital Sender 8100C. This Administrator's Guide provides much more detail on configuring the digital sender.

The configuration process

E-Mail, I-Fax, and HP JetSend configuration

After you have physically installed the digital sender, you only need to configure a few parameters to begin using it. After you have configured these parameters, you will be able to:

- send e-mail messages
- use e-mail addresses located on an LDAP server of your choosing
- send faxes (requires information provided by i-fax vendor)
- send documents to HP JetSend-enabled printers on your network
- discover the digital sender over the network with HP Web JetAdmin

Extended and optional functionality

Once you have established the digital sender on the network and enabled basic functionality, you can extend functionality for the services you wish to implement. You can also configure optional parameters for the services you have already set up.

In general, the extended and optional features consist of the following:

- security preferences
- DNS and WINS name resolution

Assigning an IP address to the digital sender

The easiest method for assigning an IP address to the digital sender is by entering it directly at the control panel. You can also assign an IP address using a DHCP or BOOTP server. You might be more familiar with assigning IP addresses to network devices from a DHCP or BOOTP server. In this scenario, you prepare the device attached to the network, make an entry for it on the DHCP or BOOTP server, and then turn the device on. The HP JetDirect print server (network interface card) inside the HP Digital Sender 8100C picks up its IP information from the DHCP or BOOTP server.

Note

You can let the digital sender time out to a default IP address. In fact, this happens automatically if you do not manually assign an IP address at the control panel within the timeout period of 2 minutes.

The default IP address is not a valid address. You must change the address to one of your own assignment. You can use the control panel to do this at any time.

Preparing for configuration

Before you start configuring the HP Digital Sender 8100C for the first time, take a few minutes to prepare so that you can complete the steps without interruption. Use the checklist on the following page.

Configuration Checklist

Decisions needed for installation

- Register the digital sender.
- Method you want to use to assign IP address to the digital sender: manually at the control panel, or from a DHCP or BOOTP server.

Information needed for e-mail configuration

- IP address for the digital sender _____
- IP subnet mask _____
- IP gateway _____
- E-mail server address _____
- E-mail default from (e-mail address) _____
- If you choose to enable the LDAP directory service (optional)
 - LDAP server address _____
 - LDAP search root _____

Additional information needed for I-Fax configuration

- Fax provider domain
(supplied by Internet fax provider) _____
- Fax billing address (e-mail address) _____
- Prefix or Postage to use before fax number
(supplied by Internet fax provider) _____
- File format (PDF or TIFF--determined by Internet fax provider) _____

Additional information needed for HP JetSend configuration

- HP JetSend-enabled printer addresses _____

Decisions and information needed for extended functionality

- Do you want to enable DNS or WINS name resolution?
 - IP address of the DNS server _____
 - IP address of the DNS server domain _____
 - IP address of the WINS server _____
- Do you want to set up registered users at this time?
 - For each user you will need: user name and user e-mail address.
- Do you want to enable guest usage?
- Do you want to allow user self-registration?

To configure parameters

- 1 If you have not already done so, turn the digital sender on.
- 2 Press **SETUP** (**ALT+F4**) from the main menu to go to the setup menu.
- 3 Press **SETTINGS** (**F2**) and use the arrow keys to highlight the **General** configuration menu from the list which appears. Press **OK** (**F1**).
- 4 In the configuration menu, use the arrow keys to scroll to a parameter you want to modify and then press **CHANGE** (**F3**).
- 5 Configure the parameters by selecting a value from a list using the arrow keys or by typing in a value.
- 6 When finished, press **OK** (**F1**). Choose another parameter from the menu.
- 7 When finished with the **General** configuration menu, press **SAVE** (**F1**).
- 8 Repeat steps 3 through 7 for the **Network**, **E-Mail**, **I-Fax**, and **Advanced** configuration menus.

Configure e-mail parameters

After you have physically installed the digital sender, you only need to configure a few parameters to begin using the digital sender. After you have configured these parameters, you will be able to send e-mail messages and use e-mail addresses located on an LDAP server of your choosing. The e-mail parameters consist of the following (see [“Configuration menu parameters” on page 26](#) for more detailed explanations):

General Configuration Menu

- **Administrator E-mail** (e-mail address of the administrator used to register the digital sender)
- **Administrator Password** (to restrict access to configurable parameters.)

Network Configuration Menu

- **IP configuration** (to specify how the digital sender receives its TCP/IP configuration—manually or from a DHCP or BOOTP server)
- **IP Address** (of the digital sender)
- **IP Subnet Mask**
- **IP Gateway** (IP address of the gateway server used to send packets from the local network)

E-Mail Configuration Menu

- **E-mail Server Addr.** (IP address of the SMTP-MIME e-mail server)
- **E-mail Default From** (default e-mail address for the FROM field of e-mail messages from the digital sender)
- **LDAP Server Address** (IP address of the server that hosts the LDAP server—not required)
- **LDAP Search Root** (basepoint from which to start searches for names on the LDAP server—may be required if you configure an LDAP server address)

Configure I-fax parameters

After you have configured the digital sender to send e-mail, you only need to configure a few additional parameters to begin sending faxes. Information for the i-fax parameters are issued by your Internet fax provider. (See [“Configuration menu parameters” on page 26](#) for more detailed explanations):

I-Fax Configuration Menu

- **Fax Provider Domain** (an Internet address)
- **Fax # Prefix** (not required by all Internet fax providers)
- **Fax Postage** (not required by all Internet fax providers)
- **Fax Account E-mail** (to receive billing information from the Internet fax provider)
- **Fax File Format** (determined by the provider)

Configure extended and optional parameters

Listed below are some additional parameters you can configure for extended and optional functionality (see [“Configuration menu parameters” on page 26](#) for detailed explanations of all parameters):

General configuration menu

- **Admin Full Name** (full name of the administrator)
- **Language** (for the control panel, if other than English)
- **Date, Time, Time Zone** (of the digital sender)
- **Paper Size** (default size for the scanning area)
- **Allow Guest Login** (either on or off)
- **Address Caching Enabled** (either on or off)
- **User Self-Registration Enabled** (either on or off)

E-Mail configuration menu

- **E-mail Default Subject** (default text for the **SUBJECT** field in e-mail messages sent by the digital sender)
- **LDAP Service Port, LDAP Account Name, LDAP Password** (additional parameters for configuring the LDAP directory service)

Network configuration menu

- **DNS Server Address, DNS Domain** (for DNS name resolution)
- **WINS Server Address** (for WINS name resolution)

To add HP JetSend-enabled devices

As a convenience for your users, you can add the addresses of HP JetSend-enabled printers used in your office. Users can then select from a list of HP JetSend-enabled printers rather than manually entering an IP address or DNS name.

To add a HP JetSend-enabled printer to the list:

- 1 At the control panel, press **PRINT (F3)**.
- 2 Type the IP address or DNS name for the HP JetSend-enabled printer you want to add, and then press **◆**. The printer is added to the list.

Note

In order to use DNS names instead of IP addresses, first configure the DNS Server Address and DNS Domain settings in the **Network** configuration menu.

- 3 If you want to add another HP JetSend-enabled printer, press **NEW (F1)** and repeat step 2. The list can contain up to 64 devices.

Test the installation

Use the following steps to verify the digital sender setup.

To test the installation

- 1 Display the Revision page to verify that the network interface card is successfully linked to the network. The TCP/IP status parameter should read **READY**. To display the page, select **STATUS** (**ALT+F3**), then **REVISION** (**F1**). Press **BACK** (**F4**) to close.
- 2 Test the e-mail service to confirm that the digital sender can communicate through Internet e-mail. See the user guide for instructions on sending e-mail. Be sure to type your address in the To field.
- 3 Test the Internet fax service by sending a test fax to a local fax number. See the user guide for instructions on sending faxes.
- 4 Test the print function by sending a document to a HP JetSend-enabled printer. See the user guide for instructions on sending to a printer.

HP Web JetAdmin

HP Web JetAdmin is an optional utility for use with the digital sender. It is a browser-based program that lets you remotely configure, monitor, and control HP network peripherals such as printers, plotters, scanners, and digital senders. Download the HP Web JetAdmin software from the HP digital sender website (www.hp.com/go/webjetadmin).

3 Administering

Summary of administrator activities

Procedures in this chapter explain how to perform administrator activities at the control panel.

Access to administrator-specific activities is blocked by the administrator password. It is recommended that administrator create a password during the setup of the HP Digital Sender 8100C.

Configuration menu parameters

Parameters that use an IP address can show only the numeric address, even when a symbolic name has been assigned to a device.

Configuration parameters on the control panel

Parameter	Description
General Menu	
Administrator E-mail	Administrator e-mail address (required). Up to 255 characters are allowed.
Administrator Full Name	Full name of the administrator. Up to 31 characters are allowed.
Administrator Password	Password for this digital sender. You can have a different password for each digital sender. Up to 15 characters are allowed. The password is case-sensitive.
Language	Language in which keys and messages appear at the control panel. Choices: English, French, German, Italian, or Spanish. The language changes as soon as you select a different language.
Date	Current date. CLEAR sets the date to Jan 1, 1980.
Time	Current time (24-hour clock). CLEAR sets the time to midnight (0:0).
Time Zone	Based on Greenwich Mean Time (GMT). In the USA, Eastern Standard Time is five hours (-5:00) behind GMT.
Paper Size	Default size for the scanning area. Users can override this setting at the control panel. Choices: Letter, A4, or Legal.
Allow Guest Login	Permission for non-registered users to send e-mail and send i-fax.
Address caching enabled	E-mail addresses and fax numbers entered during sending of a transmission are automatically added to the user's personal address book. If disabled, users must manually add an address or phone number to their personal lists.
User self-registration enabled	Permission for users to create their own user profile. If disabled, only the administrator can add or change user profiles.

Configuration parameters on the control panel (continued)

Parameter	Description
Network Menu	
IP Configuration	<p>To specify how the digital sender network interface card obtains its TCP/IP configuration. Choices:</p> <ul style="list-style-type: none"> ● MANUAL. From the control panel. ● BOOTP (Boot Protocol) or DHCP (Dynamic Host Configuration Protocol). Automatically from the network (the IP Address, IP Subnet Mask, and IP Gateway parameters are ignored). A corresponding server must be running and properly configured. The next time you open the configuration menu, you see the values that the network interface card automatically discovered. See "Assigning an IP address to the digital sender" on page 17 for details. <p>Two things happen if you configured the IP address using BOOTP or DHCP and later change the IP address at the control panel: (1) the IP address that was assigned is released and (2) the setting for this parameter changes to MANUAL. Changing this value causes the digital sender to shut down and restart.</p>
IP Address	<p>Unique TCP/IP network address of the HP JetDirect print server (network interface card) in the digital sender. Required for the digital sender to work.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>Changing this value causes the digital sender to shut down and restart.</p>
IP Subnet Mask	<p>The filter used to identify the subnet of the network interface card in the digital sender.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>Changing this value causes the digital sender to shut down and restart.</p>
IP Gateway	<p>IP address of the gateway server used to send packets off the local network.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>Changing this value causes the digital sender to shut down and restart.</p>
DNS Server Address	<p>IP address of the DNS server. Used for DNS (Domain Name System) symbolic name resolution if you identify servers and devices on your network by network name instead of by IP address.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>If left blank or set to 0.0.0.0, the function is disabled.</p>
DNS Domain	<p>If DNS name resolution is used, the IP address of the domain for the DNS server. Up to 256 characters are allowed.</p> <p>If left blank, the function is disabled.</p>

Configuration parameters on the control panel (continued)

Parameter	Description
WINS Server Address	<p>IP address of the WINS server. Used for WINS (Windows Internet Naming Service) symbolic name resolution if you identify servers and devices on your network by network name instead of by IP address.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>If left blank or set to 0.0.0.0, the function is disabled.</p>
E-mail Menu	
E-mail Server Addr.	<p>IP address of the e-mail SMTP-MIME server.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>If left blank or cleared, the e-mail service is disabled. Both the E-mail Server Addr. and E-mail Default From parameters must be enabled for the e-mail service to work.</p>
E-mail Default From	<p>Default e-mail address for the FROM field in e-mail messages from the digital sender. This default address is used <i>only</i> when users have not registered at the control panel and send an e-mail message without entering anything in the FROM field. Up to 255 characters are allowed.</p> <p>If left blank or cleared, the e-mail service is disabled. Both the E-mail Server Addr. and E-mail Default From parameters must be enabled for the e-mail service to work.</p> <p>Note: You must provide a default e-mail address to prevent users from sending anonymous e-mail messages.</p>
E-mail Default Subject	<p>Default text for the SUBJECT field in e-mail messages sent by the digital sender.</p> <p>This default text is used <i>only</i> when users do not provide a subject of their own directly from the control panel keypad. Up to 128 characters are allowed.</p>
E-mail Quality	<p>Default image quality used for documents sent by e-mail. Choices: B/W Document, Color Document, Color-B/W Photo.</p>
E-mail File Format	<p>Default format for documents sent by e-mail. Choices: PDF or TIFF</p>
Auto BCC Function Enabled	<p>Registered user who activates the copy self option in the user profile receives a copy of any e-mail message the user sends from the digital sender.</p>
LDAP Server Address	<p>IP address of the server that hosts the LDAP (Lightweight Directory Access Protocol) directory for e-mail address searches.</p> <p>CLEAR sets the address to 0.0.0.0.</p> <p>If left blank or cleared, the function is disabled.</p>

Configuration parameters on the control panel (continued)

Parameter	Description
LDAP Search Root	Basepoint (root) from which to start searches for names on the LDAP directory server. Directories are often represented in a hierarchical way using a tree. The basepoint might be a country, an organization, or other type of group. Not all servers require this information. Up to 512 characters are allowed. See the digital sender website for examples (http://www.digitalsender.hp.com).
LDAP Service Port	TCP/IP port number on which the LDAP directory server is listening. The default port is 389.
LDAP Account Name	Account name used when the LDAP server requires an authenticated login. Up to 512 characters are allowed.
LDAP Password	Password associated with the LDAP Account Name.
I-fax menu	
Fax Provider Domain	Internet address for the Internet fax account. Issued by the Internet fax provider.
Fax # Prefix	Number placed before the fax number.
Fax Postage	Security feature required by some Internet fax providers.
Fax Account E-mail	E-mail address associated with the Internet fax account. Used by the fax provider for billing purposes.
Fax File Format	Format for documents sent by Internet fax. Choices: PDF or TIFF
Advanced Menu	
E-mail File Selection	Permission for users and guests to select PDF or TIFF format for their messages.
Max User Mail Size	Restriction on e-mail message sizes allowed to be sent by users and guests. Can be set to No Limit.
E-mail Language	Language used in the e-mail cover message. Choices: English, French, German, Italian, Spanish.
Mail Ping Frequency	Interval (in minutes) at which the digital sender verifies its connection to the e-mail server. If the connection is lost, an error message appears.
ESMTP Function Enabled	Extended e-mail functions.

Controlling security

Changing or setting administrator password

Unless a password is used, anyone can perform sensitive administrator activities. Therefore, the administrator is encouraged to create a password during the setup of the HP Digital Sender 8100C.

Note

The administrator password is case-sensitive.

To change or set administrator password

- 1 Make sure the digital sender is idle.
- 2 At the control panel, press **SETUP** (**ALT+F4**). Then press **SETTINGS** (**F2**).
- 3 Select the **General** configuration menu. If an administrator password is already required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (**F1**).
- 4 When the configuration menu appears, select **Administrator Password** and then press **CHANGE** (**F3**).
- 5 Type the old administrator password and press **ENTER**.
- 6 Type the new password and press **ENTER**.
- 7 Type the new password again and press **CONFIRM** (**F1**).
- 8 Press **SAVE** (**F1**) to save the password and exit the menu.

Erasing administrator password

If you forget the administrator password, and cannot access any of the password-protected areas, call HP Technical Support ([see page 66](#)).

Determining who can use the digital sender

The administrator determines who can use the digital sender: either registered users (only those with a user profile) or both registered users and guest users.

To determine who can use the digital sender

- 1 Make sure the digital sender is idle.
- 2 At the control panel, press **SETUP** (ALT+F4). Then press **SETTINGS** (F2).
- 3 Select the **General** configuration menu. If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 Use the **Allow guest login** field to indicate your preference. On accepts guest login, Off prohibits guests from using the digital sender.
- 5 Use the **User self-registration enabled** field to indicate your preference. On allows users to register themselves, Off allows only the administrator to register users.
- 6 Press **SAVE** (F1).

Note

For more information on registered users, see [“Creating and maintaining user profiles” on page 41](#).

Obtaining status and activity information

Use these tools to learn the status of the digital sender and its jobs:

- job(s) state
- Revision page
- Tasks page

Job(s) state

The job state screen shows the status of the last five jobs processed by the digital sender, with the latest job listed first. To view the Job(s) state screen press **STATUS (ALT+F3)**. Each job has the following information associated with it:

- time processed
- type of job (e-mail, fax, or print)
- user (name of user profile which sent the job)
- status (see below)

Job status

Status	Description
Processing	Pages still being scanned by the digital sender.
Sending	The digital sender is attempting to locate the job's destination.
Sent	The job has successfully been delivered to its destination.
NW Error	Network error. The job has failed to be delivered. This message will appear if the destination HP JetSend-enabled printer is busy or out of paper, or the sending process times out.
PP Error	Post processing error. An error occurred when the digital sender was converting the page(s) to PDF or TIFF. Try re-scanning and re-sending the message.

Revision page

The Revision page displays useful information about the digital sender (see the table on the next page). Use it for the following reasons:

- verify configuration settings
- verify the operating status of the network interface card
- learn the MAC address of the digital sender
- learn firmware version numbers

The Revision page is in English only (even if you configure the control panel for a different language).

To display the Revision page

- 1 At the control panel, press **STATUS** (ALT+F3).
- 2 Press **REVISION** (F1).

Revision page parameters

Parameter	Descriptions
Box Version #	Product version
FW Ver.	Version of firmware installed in the digital sender.
FW Date	Release date of the firmware installed in the digital sender.
HP JetDirect Prd. #	Product number of the network interface card: <ul style="list-style-type: none"> ● HPJ3113A Ethernet (10Base-T) networks
HP JetDirect FW Rev.	Version of firmware installed on the network interface card (G.xx.xx).
MAC Address	Unique LAN hardware address assigned to the network interface card at the time of manufacture (for example, 0060B072525E).
IP Address	Unique TCP/IP address of the network interface card. This is assigned by the administrator.
Subnet Mask	If subnets are used, the filter used to identify the subnet of the HP JetDirect print server (network interface card). This is assigned by the administrator.
TCP/IP status	Status of the connection to the network: <ul style="list-style-type: none"> ● INITIALIZING The network interface card is searching for a valid IP address. After 2 minutes, a default IP address is automatically assigned. ● READY The network interface card has been assigned an IP address and is actively connected to the network. ● ERROR A network or network interface card error has been detected.
Gateway Addr.	IP address of the default gateway server used to communicate with nodes on other subnets or networks.
Received pkts	Total number of packets received without error.
Bad packets	Total number of packets received with errors.
Framing err.	Total number of packets received that contained a CRC (cyclic redundancy check) or framing (alignment) error.
Transm. pkts	Total number of packets transmitted without error on the network.
Collisions	Total number of packets that were not transmitted due to successive collisions.
Late collisions	Total number of packets that were not transmitted due to late collisions (collisions after the 64th byte of a packet).

Revision page parameters (continued)

Parameter	Descriptions
Log Server Addr.	IP address of the host computer that receives syslog messages from the HP JetDirect print server.
HP JetDirect Cfg.	Indicates how the digital sender has received its TCP/IP configuration: <ul style="list-style-type: none"> ● DHCP Automatically from a DHCP server. ● MANUAL Manually from entries made at the control panel.
HP JetDirect Timeout	Timeout value in seconds that an idle data connection is allowed to remain open. Valid values are 0 to 3600. A value of 0 disables the timeout mechanism. The default is 90 seconds.
HP JetDirect ID	HP manufacturing identification code assigned to the network interface card.
Boot Block Ver.	Version of the digital sender startup (boot) program. This information is used only by HP manufacturing and HP customer support.
Multi-Boot Ver.	Version of the digital sender multi-boot program. This information is used only by HP manufacturing and HP customer support.
Engine FW Ver.	Version of firmware used by the digital sender scanner engine. This information is used only by HP manufacturing and HP customer support.
Running Image #	The firmware image currently running. Either 1 or 2.

Tasks

The Tasks page lists the services running on the digital sender at that moment. Each task is assigned a Status, Error Number (Errno), and State (St). Tasks cannot be modified or deleted and are diagnostic tools that may be referred to by HP Technical Support staff.

To display the Tasks page

- 1 At the control panel, press **STATUS** (ALT+F3).
- 2 Press **TASKS** (F2).

Notification of e-mail delivery

A user can choose whether or not to receive a receipt for the delivery of an e-mail. If the user chooses to receive a receipt, the user receives a notification of e-mail delivery. If the administrator enables AutoBCC in the **E-mail** configuration menu, the user will receive a return copy of the message.

Notes about notifications:

- E-mail notifications require that the recipients have an e-mail address configured in their user profile.

Administrator tools

Items in the **Tools** menu are generally used for troubleshooting or diagnostic reasons. This identical menu is found in each of the configuration menus. If no administrator password has been configured, any user has access to the **Tools** menu. Therefore, it is recommended that an administrator password be created when the digital sender is set up.

Shutting down and restarting

Use the shutdown procedure for the following reasons:

- to prepare the digital sender to be physically turned off (for example, when you need to replace a part or to close down for holidays)
- when instructed to do so by troubleshooting steps or HP customer support

Notes about the procedure:

- Shutdown locks the digital sender from use until you restart it. The procedure does not turn the power off.
- Jobs in process might be interrupted and lost.

To shut down

- 1 Make sure the digital sender is idle.
- 2 At the control panel, press **SETUP** (ALT+F4). Then press **SETTINGS** (F2).
- 3 Select any of the configuration menus. If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **Ok** (F1).
- 4 When the configuration menu appears, press **TOOLS** (F2).
- 5 Select **Shutdown** and press **Ok** (F1).

Note

A shutdown key sequence exists that will shut down the digital sender if it becomes unresponsive and therefore will not navigate to the **Shutdown** option. The code is: **SHIFT+ALT+ /** .

Resetting to factory defaults

Use this procedure for the following reasons:

- when you want to completely reconfigure the digital sender and all address books
- when instructed to do so by troubleshooting steps or HP customer support

Resetting the digital sender to factory defaults is a combination of resetting address books and resetting network parameters. It does the following:

- erases the administrator password
- locks the digital sender from use until the reset is complete
- erases the configuration for TCP/IP, DNS/WINS, security, e-mail, fax, and LDAP settings
- erases the contents of all public and personal address books, distribution lists, and phone books.

Notes about the procedure:

- After you reset the digital sender to the factory defaults, neither you nor any users can use the digital sender again until you have reconfigured it, starting with the steps under [“Configure e-mail parameters” on page 20](#).

CAUTION

This action cannot be undone.

To reset to factory defaults

- 1 Make sure the digital sender is idle.
- 2 At the control panel, press **SETUP** (ALT+F4). Then press **SETTINGS** (F2).
- 3 Select any of the configuration menus. If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 When the configuration menu appears, press **TOOLS** (F2).
- 5 Select **Factory defaults** and press **OK** (F1).
- 6 Press **OK** (F1) to confirm that you want to reset to factory defaults.

Checking the address book database

At any time, you can check the database of address books to correct problems and inconsistencies in the information.

Perform the database check for the following reasons:

- when the digital sender seems to be performing slowly for no apparent reason
- when the digital sender was inadvertently turned off during a sensitive operation (such as saving configuration changes)
- when you detect inconsistencies between address books and distribution lists
- when instructed to do so by troubleshooting steps or by HP customer support

Notes about the procedure:

- The procedure causes the digital sender to shut down and then restart.
- The procedure can take as long as 25 minutes, based on the amount of information in address books.

Note

If the check fails, turn the digital sender off and back on, and then try again. If the problem persists, the address book database is beyond recovery. Clear the address book database ([see page 39](#)).

To check address books

- 1 Make sure the digital sender is idle.
- 2 At the control panel, press **SETUP (ALT+F4)**.
- 3 Select any configuration menu. If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK (F1)**.
- 4 When the configuration menu appears, press **TOOLS (F2)**.
- 5 Select **Check Address Books** and press **OK (F1)**.
- 6 Confirm that you want to perform the check. The digital sender shuts down and then checks the address book database as it restarts.

Clearing the data base

You may want to clear the address book data base if:

- You are changing the digital sender's user base (e.g. moving the digital sender to a different department)
- The address book has become corrupt and checking the address books ([see page 38](#)) has not corrected the problem

CAUTION

Clearing the address book data base will erase all user profiles, e-mail addresses, e-mail lists, fax numbers, and fax lists.

To clear the address book data base

- 1 At the control panel, press **SETUP (ALT+F4)**.
- 2 Select any configuration menu. If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK (F1)**.
- 3 When the configuration menu appears, press **TOOLS (F2)**.
- 4 Select **Clear data base**.
- 5 The confirmation dialog box appears. Press **OK** to clear the data base. Press **CANCEL** to exit.
- 6 The data base is cleared and the digital sender re-starts.

B/W Contrast

If e-mail or i-fax documents sent by the digital sender appear too light or too dark, the problem may be solved by adjusting the contrast. Use this feature much the same way you would use a similar function on a photocopier: decreasing the contrast lightens the scan of the image, increasing the contrast darkens it.

To change the contrast for sending

- 1 At the control panel, press **SETUP** (**ALT+F4**). Then press **SETTINGS** (**F2**).
- 2 Select any of the configuration menus. If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (**F1**).
- 3 When the configuration menu appears, press **TOOLS** (**F2**).
- 4 Select **B/W Contrast** and press **OK** (**F1**).
- 5 By default, the digital sender is set to Automatic. Press **ENTER**, then use **▲** and **▼** to switch to Manual. Press **ENTER**.
- 6 Use **◀** or **▶** to move to the contrast bar. Move the marker to the left to lighten the contrast, move the marker to the right to darken the contrast.
- 7 Press **SAVE** (**F1**).

Note

In general, the **B/W Contrast** setting should be kept on Automatic unless a contrast adjustment is necessary to improve readability.

Creating and maintaining user profiles

This section contains information about user profiles that pertains to the administrator. See the user guide for details on other uses.

The administrator determines who can create and modify user profiles in these ways:

- If Allow user self-registration in the **General** configuration menu is on, users can create and modify their own profile. The administrator can see and modify any user profile, including user passwords.
- If Allow user self-registration in the **General** configuration menu is off, only the administrator can create and modify user profiles, including user passwords.
- The administrator can also enable or disable guest usage of the digital sender (**General** configuration menu). If disabled, anyone wishing to use the digital sender would be required to have a user profile.

To create a user profile

- 1 At the control panel, press **SETUP** (ALT+F4). Then press **USERS** (F1).
- 2 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 3 Type a name in the Users field and press **ADD** (F1).

Note

You may want to use a naming convention for all user names, such as last name_first name or first name_last name.

- 4 Type the user's e-mail address, password, and password confirmation, pressing **ENTER** after each field.
- 5 Press **OPTIONS** (F2) and select **YES** (F1) or **NO** (F4) for each option in the user profile.
- 6 Press **OK** (F1). The user profile can now be used to send e-mail, send faxes, and print.

To change a user profile

- 1 At the control panel, press **SETUP (ALT+F4)**. Then press **USERS (F1)**.
- 2 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK (F1)**.
- 3 Select a name in the list of users by using the arrow keys or type the profile name in the Users field and press **MODIFY (F3)**.
- 4 Modify the name, e-mail address, password, and password confirmation, pressing **ENTER** after each field.
- 5 Press **OPTIONS (F2)** and select **YES (F1)** or **NO (F4)** for each option in the user profile.
- 6 Press **OK (F1)**.

To delete a user profile

- 1 At the control panel, press **SETUP (ALT+F4)**. Then press **USERS (F1)**.
- 2 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK (F1)**.
- 3 Highlight a name in the list of users or type the profile name in the Users field and press **DELETE (F3)**.
- 4 Press **OK (F1)** to delete the user profile. Press **CANCEL (F4)** to return to the Users screen without deleting the profile.

CAUTION

Deleting a user profile also deletes that user's address book.

Working with address books

This section contains information about address books that pertains to the administrator.

The administrator maintains these categories in the [LISTS](#) option of the [SETUP \(ALT+F4\)](#) menu:

- **Public E-mail Lists**
Contains predefined groups of e-mail addresses available to any user. Only the administrator can change information in this address book.
- **Public E-mail Addresses**
Contains e-mail addresses available to any user. Only the administrator can change information in this address book.
- **User's E-mail Lists**
Contains a registered user's predefined groups of e-mail addresses. The user can change information in this address book through the [LISTS](#) option of the main menu.
- **User's E-mail Addresses**
Contains e-mail addresses available to the registered user. The user can change information in this address book through the [LISTS](#) option of the main menu.
- **Fax Lists**
Contains predefined groups of fax numbers available to any registered user. The user can change information in this address book through the [LISTS](#) option of the main menu.
- **Fax Numbers**
Contains fax numbers available to any registered user. The user can change information in this address book through the [LISTS](#) option of the main menu.

Maintaining the Public Lists address book

Only the administrator can change information in the Public Lists address book.

To add a list to the Public Lists address book

- 1 Press **SETUP** (ALT+F4), then **LISTS** (F3).
- 2 Select **Public E-mail Lists**.
- 3 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 Type the name for the distribution list.
- 5 Press **ENTER**.
- 6 Press **OK** (F1) to add the new list.
- 7 Type an address to add to the list and press **ENTER**.
- 8 Edit the information for the address and click **SAVE** (F1).
- 9 Repeat steps 7 and 8 for each address to add to the list.

To delete a list from the Public Lists address book

- 1 Press **SETUP** (ALT+F4), then **LISTS** (F3).
- 2 Select **Public E-mail Lists**.
- 3 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 Type a list name or choose the distribution list name from the list.
- 5 Press **DELETE** (F3).
- 6 Press **OK** (F1) to confirm.

To add addresses to a distribution list

- 1 Press **SETUP** (ALT+F4), then **LISTS** (F3).
- 2 Select **Public E-mail Lists**.
- 3 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 Select the distribution list you want to edit.
- 5 Press **OK** to modify the list.
- 6 Type an address to add to the list and press **ENTER**.
- 7 Edit the information for the address and click **SAVE** (F1).
- 8 Repeat steps 6 and 7 for each address to add to the list.

To delete addresses from a distribution list

- 1 Press **SETUP** (ALT+F4), then **LISTS** (F3).
- 2 Select **Public E-mail Lists**.
- 3 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 Select the distribution list you want to edit.
- 5 Press **OK** (F1) to modify the list.
- 6 Select the addresses.
- 7 Press **DELETE** (F3).
- 8 Press **OK** (F1) to confirm the deletion.

Maintaining the Public E-mail address book

Only the administrator can change information in the Public E-mail address book.

To add an address to the Public E-mail address book

- 1 Press **SETUP** (ALT+F4), then **LISTS** (F3).
- 2 Select **Public E-mail Addresses**.
- 3 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK** (F1).
- 4 Add an address by doing one of the following:
 - Type a name for this entry in the **Name** field and press **ADD** (F1).
 - If the digital sender is set to work with an LDAP server, begin typing the first letters of an entry and press **SEARCH** (F2). Use the **▲** and **▼** keys to select an entry and press **OK** (F1).
- 5 Change the name and e-mail information for this entry as necessary. Use **TAB** to move between fields.
- 6 Press **SAVE** (F1).
- 7 Repeat steps 4 through 6 for each address you want to add.
- 8 When finished, click **SAVE** (F1).

To delete an address from the Public E-mail address book

- 1 Press **SETUP** (ALT+F4), then **LISTS** (F3).
- 2 Select **Public E-mail Addresses**.
- 3 If an administrator password is required, the **HP Digital Sender 8100C Administrator's Password** dialog box appears. Type the password and press **OK**.
- 4 Type a display name or choose the address from the list using the arrow keys.
- 5 Press **DELETE** (F3).
- 6 Press **OK** (F1) to confirm.

CAUTION

Deleting an address from the public e-mail address book also deletes that address from all public and personal distribution lists.

Maintaining user lists and addresses

To add, modify, or delete the addresses and lists for a particular registered user, follow the procedures in [“Maintaining the Public E-mail address book” on page 46](#) and [“Maintaining the Public Lists address book” on page 44](#) with the following provisions:

- Select User’s E-mail Lists or User’s E-mail Addresses from **LISTS**.
- Between steps 3 and 4, enter the user name.

Maintaining fax lists and numbers

Users and the administrator have access to fax lists and numbers. To add, modify, or delete fax lists and numbers, follow the procedures in the user guide with the following provisions:

- Press **SETUP** (**ALT+F4**), then **LISTS** (**F3**) to access the fax lists and fax numbers.
- The digital sender will not ask for a user name.

Changing the contrast level of the LCD

Use this procedure to change the contrast of the display on the control panel. You might want to do this, for example, to adjust for lighting conditions in your office.

To change contrast level

You can change the contrast level at any time. The digital sender does not need to be idle.

At the control panel, press the following while at the main menu or during login:

- SHIFT+ALT+ ▲** (decreases)
- SHIFT+ALT+ ▼** (increases)

Upgrading the digital sender firmware

If you register with the digital sender website (<http://www.digitalsender.hp.com>), you will be notified by e-mail when a firmware upgrade is available for the digital sender.

Notes about the procedure:

- When you upgrade the digital sender firmware, you replace the existing firmware image with one or more new files.
- The digital sender is locked from use until the upgrade has finished.
- This procedure causes the digital sender to shut down and restart.
- The upgrade interrupts any job in progress.
- If the digital sender detects a problem with the new firmware version, it automatically reverts to the old version.
- The upgrade takes from 1 to 5 minutes.

To upgrade the digital sender firmware

- 1 Download the firmware upgrade file from the digital sender website (<http://www.digitalsender.hp.com>) to a computer which shares the network with the digital sender.
- 2 Follow the instructions on the website for upgrading the firmware image.

At the end of the procedure, you are notified of the upgrade's success or failure.

Backing up and restoring the digital sender

The Backup and Restore utilities save and recover the configuration of all personal and public address books, and the configuration of the digital sender. These utilities are stored in the \Utility folder on the product CD and must be installed on a computer on the same network as the digital sender.

To install the Backup and Restore utilities

- 1 On the product CD, browse to the Utilities folder.
- 2 Review the Readme.txt file
- 3 Run Install.bat. The utilities are installed to C:\HP 8100C\Utility.

Note

Backup and Restore are command line programs which can be run from a .bat or .cmd file.

Backing up the digital sender

Use this procedure:

- After configuring the digital sender, creating users, and configuring public and personal address books
- Periodically to ensure recoverability of the digital sender to a desired state
- Before performing firmware upgrades

Backup saves the configuration of the digital sender to a .tgz file on your hard drive.

To back up the digital sender

- 1 Make sure the computer you are using has the Backup and Restore utilities installed.
- 2 At a command line, run Backup using the following syntax:
`backup.exe/dir:Backup Directory/d:Digital Sender
/p:Administrator Password/l/tr`

Note

Example: `backup.exe /dir:c:\data /d:xxx.xxx.xxx.xxx /p:password /l /tr`

Restoring the digital sender

Use this procedure:

- After initializing the address books
- After performing a Restore to factory defaults
- When instructed to do so by HP Customer Support

Note

This procedure will erase any changes made to the address books and configurations since a backup image was created.

To restore the digital sender

- 1 Make sure the computer you are using has the Backup and Restore utilities installed.
- 2 At a command line, run Restore using the following syntax:

```
restore.exe /f:Restore File /d:Digital Sender  
/p:Administrator Password /l/tr
```

Note

Example: `restore.exe /f:c:\data\data.tgz /d:xxx.xxx.xxx.xxx /p:password /l /tr`

Backup and Restore codes

Source	Description
/dir	Directory must be in a volume supporting long file names.
/d	Digital sender network name or IP address.
/p	Digital sender administrator password.
/l	Log results in log file (backup.log or restore.log).
/tr	Log low level activity in trace file (backup.trc or restore.trc).
/f	Restore file, generated by previous backup.

Cleaning the digital sender

Digital Sender glass

When to clean:

- as necessary
- when vertical streaks appear on electronic forms of sent documents

To clean the glass

Clean the glass surface gently using a soft cloth. Do not press hard on the glass surface (you could break the glass). You may dampen the cloth with water, isopropyl alcohol, or window cleaner, if necessary.

CAUTION


Do not use other cleaning fluids. They may damage the digital sender. Never spray cleaning fluid directly on the digital sender glass.

ADF


When to clean:

- if paper documents in good condition begin to mis-feed
- when vertical streaks appear on electronic forms of sent documents


1




2

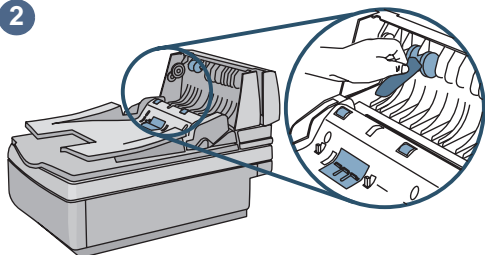

4




5

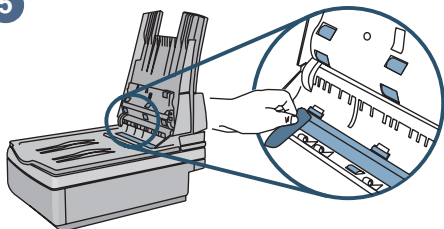

To clean the ADF


- 1 Raise the control panel access hatch.
- 2 Wipe the rollers and separation pad with a soft, clean, lint-free cloth. You may dampen the cloth with isopropyl alcohol, if necessary.
- 3 Close the access hatch. Be sure it snaps down on both sides.
- 4 Raise the input tray.
- 5 Wipe the top of the ADF window (the clear plastic window) and rollers with a soft, clean, lint-free cloth. You may dampen the cloth with water, isopropyl alcohol, or window cleaner, if necessary.

6

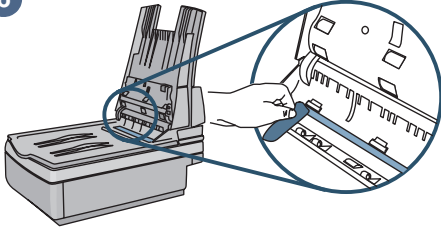

6 Check the flat gray bar above the ADF window. The bar should have no black or other markings. If necessary, clean the flat gray bar.


7



7 Raise the output tray.


8 Wipe the bottom of the ADF window (the clear plastic window) with a soft, clean, lint-free cloth. You may dampen the cloth with water, isopropyl alcohol, or window cleaner, if necessary.

8



9 To eliminate vertical streaks, clean the flatbed glass, especially near the top of the glass.

9



CAUTION

Do not use other cleaning fluids. They may damage the ADF window. Never spray cleaning fluid directly on the ADF.

4 Troubleshooting

Sources for information about problems

Sources for information about problems

Source	Description
Control panel messages	Messages on the control panel display when there are problems. See “Control panel messages” on page 56 for a list of messages and recommended actions.
Job(s) state	This screen reveals the status of the last five jobs processed by the digital sender. See “Job(s) state” on page 32 for details.
Revision page	The Revision page that you can display at the control panel is an important troubleshooting tool. Ability to display the page indicates that the digital sender is operating correctly. Information on the page reveals the status of your network and the network interface card. The page is also your reference for information about firmware versions and product numbers (sometimes needed when you contact HP customer support). See “Revision page” on page 33 for details.

Troubleshooting the digital sender

General digital sender troubleshooting

Use the table in the user guide to solve common problems encountered while using the digital sender. Contact HP customer support ([see page 67](#)) if the actions suggested there do not resolve the problem.

Control panel messages

The following table lists the messages the control panel might display which may require the administrator's attention. The table also lists the cause of the message, and recommended actions. See the user guide for other control panel messages.

Note

The messages are listed in alphabetical order. Messages that report normal status are not included.

Control panel messages

Message	Description	Actions
AB Error <i>codes</i> .	An internal problem in accessing address books has occurred.	<ul style="list-style-type: none"> ● Turn the digital sender off and then back on. ● Perform a database check (see "Checking the address book database" on page 38). ● If the problem persists, note the error codes and contact HP customer support.
The default "From" e-mail address is not set. Cannot send e-mail messages if "From" field is not provided either at control panel or in registered user profile.	A default FROM e-mail address is missing from the configuration.	<ul style="list-style-type: none"> ● Use the E-mail configuration menu to configure the default FROM e-mail address. ● If the problem persists, contact HP customer support.
The DNS configuration is inconsistent. Please check.	There is a problem with the DNS (Domain Name System) configuration.	<ul style="list-style-type: none"> ● Using the Network configuration menu, make sure that you have correctly configured a DNS server and default domain. ● Try reentering the information in the configuration menu. ● If the problem persists, contact HP customer support.

Control panel messages (continued)

Message	Description	Actions
The e-mail configuration is inconsistent. Please check.	There is a problem with the e-mail configuration.	<ul style="list-style-type: none"> ● Using the E-mail configuration menu, make sure that you have correctly configured the e-mail server address and e-mail default FROM address. ● Try reentering the information in the Network configuration menu. ● Turn the digital sender off and then back on. ● If the problem persists, contact HP customer support.
The e-mail function isn't configured. Please contact the administrator or refer to the documentation.	There is a problem with the e-mail configuration.	<ul style="list-style-type: none"> ● See "Configure e-mail parameters" on page 20.
E-mail server not available. Contact the administrator.	You selected the e-mail function, but the e-mail server is turned off or cannot be reached.	<ul style="list-style-type: none"> ● Turn the digital sender off and then on again. ● Make sure all cabling is securely connected. ● Make sure the e-mail server is running and can be reached from the portion of the network on which the digital sender is installed. ● Make sure the network interface card is communicating with the network. To do this, verify that the TCP/IP status parameter on the Revision page reads READY, and then try to reach the digital sender using a network command such as ping.
Errors were found when checking the address book. Initialize address book?	An internal check of the address book database found significant problems.	<ul style="list-style-type: none"> ● Reset address books by answering "Yes" to the control panel question. Wait for the reset to complete and then restore a backup copy of the address book.
The I-fax configuration is inconsistent. Please check.	There is a problem with the I-fax configuration.	<ul style="list-style-type: none"> ● Using the I-fax configuration menu, make sure that you have correctly configured the I-fax domain, fax account e-mail address, fax prefix and/or fax postage. ● Try reentering the information in the Network configuration menu. ● Turn the digital sender off and then back on. ● If the problem persists, contact HP customer support.
The i-fax function isn't configured. Please contact the administrator or refer to the documentation.	There is a problem with the i-fax configuration.	<ul style="list-style-type: none"> ● See "Configure I-fax parameters" on page 21.
Internal error. <i>codes</i> Digital Sender halted.	Internal problem.	<ul style="list-style-type: none"> ● See the internal error table starting on page 61.

Control panel messages (continued)

Message	Description	Actions
Invalid credentials. Check account name and password.	The account name and password that have been configured for authenticating LDAP searches are invalid.	<ul style="list-style-type: none"> ● Use the E-mail configuration menu at the control panel to change the account name and password.
Invalid password. Press any key to retry.	The digital sender did not recognize the password you entered.	<ul style="list-style-type: none"> ● Press any key and then retype the password. The password is case-sensitive, so make sure you type the right combination of uppercase and lowercase letters. ● If the problem persists see "Erasing administrator password" on page 30.
JetDirect not responding. Please check the card or the firmware version.	The firmware version of the HP JetDirect print server (interface card) installed in the digital sender is not compatible with the product.	<ul style="list-style-type: none"> ● Contact HP customer support.
The LDAP configuration is inconsistent. Please check.	There is a problem with the LDAP configuration.	<ul style="list-style-type: none"> ● Using the E-mail configuration menu, make sure that you have correctly configured the LDAP server. ● Try reentering the information in the E-mail configuration menu. ● Turn the digital sender off and then back on. ● If the problem persists, contact HP customer support.
LDAP protocol error.	The LDAP search could not complete because of a problem with a network connection or LDAP server.	<ul style="list-style-type: none"> ● Turn the digital sender off and then back on. ● Check that the other functions of the digital sender are working. ● Make sure the LDAP server is functioning properly. ● If the problem persists, contact HP customer support.

Control panel messages (continued)

Message	Description	Actions
The LDAP server is currently unreachable. Contact the administrator.	There is a problem with either the LDAP server or the network.	<ul style="list-style-type: none"> ● Try again later. ● Check that all cabling is securely connected. ● Using the Network and E-mail configuration menus, make sure you have correctly configured all TCP/IP addresses, the LDAP server name, and (optionally) the LDAP port number. ● If you use symbolic names, make sure you have correctly configured a DNS or WINS server in the Network configuration menu. ● Check that the network is working correctly using a network command such as ping. ● Check with the LDAP server administrator to make sure the LDAP server is running. ● Check that the network is properly configured. ● If the problem persists, contact HP customer support.
Network error <i>codes</i> .	There is a problem with the network interface card.	<ul style="list-style-type: none"> ● Turn the digital sender off and then back on. ● Check the TCP/IP status parameter on the Revision page. If it displays READY, try reaching the digital sender using a network command such as ping. If it displays ERROR, note the codes and contact HP customer support.
No matches found.	There is no entry in the LDAP directory that matches your search string and search criteria.	<ul style="list-style-type: none"> ● Check the accuracy of your search string and search criteria.
Object not found. Check your configuration.	Either the search root or the name/password combination for authenticating searches in the LDAP server is incorrect.	<ul style="list-style-type: none"> ● Use the E-mail configuration menu at the control panel to correct the search root or name/password combination.
Partial results. Check your configuration.	The search root for searches in the LDAP server is incorrect.	<ul style="list-style-type: none"> ● Use the E-mail configuration menu at the control panel to correct the search root.
Passwords do not match. Press any key to retry.	During the procedure to change password, the confirming password that was entered did not match the first password.	<ul style="list-style-type: none"> ● Try again.

Control panel messages (continued)

Message	Description	Actions
Search error.	An unexpected problem occurred in the LDAP search (for example, memory shortage, or problem with the network link or LDAP server).	<ul style="list-style-type: none"> ● Try the search again. ● Turn the digital sender off and then back on. ● If the problem persists, contact HP customer support.
Sorry, you have typed an incorrect password. Please retype your password.	The digital sender did not recognize the password you typed.	<ul style="list-style-type: none"> ● Press any key to clear the message, and then retype the password. Passwords are case-sensitive, so make sure you enter the correct combination of lowercase and uppercase letters. ● Check the user profile for the password.
This operation can require several minutes. Do you really want to proceed?	You are being asked to confirm that you want to check the address book database.	<ul style="list-style-type: none"> ● Press OK to continue with the database check or press CANCEL to cancel. If you continue, the digital sender shuts down and restarts.
This user is not registered. Please add them.	The user needs a user profile.	<ul style="list-style-type: none"> ● See “Creating and maintaining user profiles” on page 41.
This will clear the configuration and all the destinations. Do you really want to proceed?	You are being asked to confirm that you want to reset the digital sender to the factory defaults.	<ul style="list-style-type: none"> ● Press OK to continue with the reset or press CANCEL to cancel.
This will clear your changes. Do you really want to proceed?	You are being asked to confirm that you want to discard all changes that you have made in the configuration menu.	<ul style="list-style-type: none"> ● Press OK to discard your changes; this takes you out of the configuration menu. Press CANCEL to return to the configuration menu, where you can use SAVE to save the changes before exiting.
The user name you typed was not found. Contact the administrator.	The digital sender did not recognize the user name you entered.	<ul style="list-style-type: none"> ● Make sure the name is correct and try again.
The WINS configuration is inconsistent. Please check.	There is a problem with the WINS (Windows Internet Naming Service) configuration.	<ul style="list-style-type: none"> ● Try reentering the information in the Network configuration menu. ● If the problem persists, contact HP customer support.
You do not have sufficient access rights.	The account name used to authenticate searches with LDAP server has insufficient rights to access the information.	<ul style="list-style-type: none"> ● Use the E-mail configuration menu at the control panel to change the account name and password.
You need to become a registered user to use this digital sender. Please contact your admin.	Allow user self-registration in the General configuration menu is disabled.	<ul style="list-style-type: none"> ● The administrator must add the user. See “Creating and maintaining user profiles” on page 41. ● Enable Allow user self-registration.

Internal error message descriptions and actions

Code	Description	Actions
<p>NOTE Every internal error message has a code associated with it. Use the code to locate the description and action.</p>		
5,xxxxx	Internal software or hardware problem.	<ul style="list-style-type: none"> ● Turn the digital sender off and then back on. ● Verify control panel access hatch is snapped into place. ● Verify all cables are seated securely. ● If the problem persists, note the code and contact HP customer support.
7,xxxxx	Internal failure.	<ul style="list-style-type: none"> ● Turn the digital sender off and then back on. ● Reconfigure all network parameters. ● If the problem persists, note the code and contact HP customer support.
10,0	Failure initializing address books.	<ul style="list-style-type: none"> ● Turn the digital sender off and then back on. ● Check the address book database (see “Checking the address book database” on page 38). ● Clear the address book. ● Reset the digital sender to factory defaults (see “Resetting to factory defaults” on page 37). <p>NOTE: This also erases the administrator password, all TCP/IP configuration, and all public and personal address books.</p> <ul style="list-style-type: none"> ● If the problem persists, note the code and contact HP customer support.

Troubleshooting network problems

Network interface card troubleshooting

Several parameters on the Revision page provide helpful information about the print server. In particular, the TCP/IP status parameter indicates whether the print server is actively connected to the network or whether an error condition exists.

See [“Revision page” on page 33](#) for a description of all parameters and for steps on how to access the Revision page.

If the digital sender fails to connect to the network, verify the following information is correctly entered in the **Network** configuration menu.

- IP address
- IP subnet mask
- IP gateway

Refer to <http://www.digitalsender.hp.com> for advanced network troubleshooting guides.

5 Warranty and support information

Hewlett-Packard limited warranty statement

HP PRODUCT	DURATION OF WARRANTY
HP Digital Sender 8100C	One year

- 1 HP warrants HP hardware, accessories, and supplies against defects in materials and workmanship for the period specified above. If HP receives notice of such defects during the warranty period, HP will, at its option, either repair or replace products which prove to be defective. Replacement parts may be either new or like-new.
- 2 HP warrants that HP software will not fail to execute its programming instructions, for the period specified above, due to defects in material and workmanship when properly installed and used. If HP receives notice of such defects during the warranty period, HP will replace software media which does not execute its programming instructions due to such defects.
- 3 HP does not warrant that the operation of HP products will be uninterrupted or error free. If HP is unable, within a reasonable time, to repair or replace any product to a condition as warranted, customer will be entitled to a refund of the purchase price upon prompt return of the product.
- 4 HP products may contain remanufactured parts equivalent to new in performance or may have been subject to incidental use.
- 5 The warranty period begins on the date of the delivery or on the date of installation if installed by HP. If customer schedules or delays HP installation more than 30 days after delivery, warranty begins on the 31st day from delivery.

- 6 Warranty does not apply to defects resulting from improper or inadequate maintenance or calibration, software, interfacing, parts or supplies not supplied by HP, unauthorized modification or misuse, operation outside of the published environmental specifications for the product, or improper site preparation or maintenance.

Note

Operation of the digital sender beyond the limit of its nominal duty cycle (scanning greater than the equivalent of 3300 pages per month) shall be deemed digital sender abuse and all repairs thereafter are to be billed on a time-and-materials basis.

- 7 TO THE EXTENT ALLOWED BY LOCAL LAW, THE ABOVE WARRANTIES ARE EXCLUSIVE AND NO OTHER WARRANTY, WHETHER WRITTEN OR ORAL, IS EXPRESSED OR IMPLIED AND HP SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTORY QUALITY, AND FITNESS FOR A PARTICULAR PURPOSE.
- 8 HP will be liable for damage to tangible property per incident up to the greater of \$300,000 or the actual amount paid for the product that is the subject of the claim, and for damages for bodily injury or death, to the extent that all such damages are determined by a court of competent jurisdiction to have been directly caused by a defective HP product.
- 9 TO THE EXTENT ALLOWED BY LOCAL LAW, THE REMEDIES IN THIS WARRANTY STATEMENT ARE THE CUSTOMER'S SOLE AND EXCLUSIVE REMEDIES. EXCEPT AS INDICATED ABOVE, IN NO EVENT WILL HP BE LIABLE FOR LOSS OF DATA OR FOR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDING LOST PROFIT OR DATA), OR OTHER DAMAGE, WHETHER BASED IN CONTRACT, TORT, OR OTHERWISE.
- 10 FOR CONSUMER TRANSACTIONS IN AUSTRALIA AND NEW ZEALAND; THE WARRANTY TERMS CONTAINED IN THIS STATEMENT, EXCEPT TO THE EXTENT LAWFULLY PERMITTED, DO NOT EXCLUDE, RESTRICT OR MODIFY AND ARE IN ADDITION TO THE MANDATORY STATUTORY RIGHTS APPLICABLE TO THE SALE OF THIS PRODUCT TO YOU.

Hewlett-Packard Year 2000 warranty

Subject to all of the terms and limitations of the HP Limited Warranty Statement provided with this HP Product, HP warrants that this HP product will be able to accurately process date data (including, but not limited to, calculating, comparing, and sequencing) from, into, and between the 20th and 21st centuries, and the year 1999 and 2000, including leap year calculations, when used in accordance with the Product documentation provided by HP (including any instructions for installing patches or upgrades), provided that all other products (e.g., hardware, software, firmware) used in combination with such HP product(s) properly exchange date data. The duration of the Year 2000 warranty extends through January 31, 2001.

Replacement parts and accessories

You can obtain replacement parts for your HP Digital Sender 8100C by contacting your sales representative or your Hewlett-Packard dealer.

Replacement parts and accessories

Item	Part or product number
Documentation CD-ROM (full set)	C7707-60009
Welcome Poster	C7707-90004
Welcome Poster (Eastern Europe)	C7707-90015
ADF window	C5195-16511
Bumper foot	C4557-40118
Control panel clip	C7707-40005

HP customer support options worldwide

You can call HP for support using the table below. For all other support information, such as obtaining printer drivers or help using an online server, see [“HP support” on page 69](#).

Customer Support and Product Repair Assistance for the U.S. and Canada (See the administrator guide for additional product repair information.)

Call (1) (208) 323-2551 in the U.S. Monday through Friday from 6 am to 6 pm (Mountain Time) free of charge for 90 days. The 90-day period begins with the first support call, and it must be within the one-year hardware warranty period. However, your standard long-distance phone charges still apply. Have your product nearby and your serial number ready when calling.

After your free telephone-support period has expired, fee-based telephone assistance is available to answer your product questions. Call (1) (900) 555-1500 (\$2.50* per minute, U.S. only) or call 1-800-999-1148 (\$25* per call, Visa or MasterCard, U.S. and Canada) Monday through Friday from 6 am to 6 pm (Mountain Time). *Charges begin only when you connect with a support technician. *Prices subject to change.*

European Customer Support Center Language and In-Country Options Available

Open Monday through Friday 8:30–18:00 CET (*unless otherwise noted*)

HP provides a free telephone support service for 90 days, beginning with the first support call, but it must be within the one-year warranty period. By calling a telephone number listed below, you will be connected to a responsive team waiting to help you. If you require support after your 90-day free phone support has expired, you can receive support for a fee through the same telephone number. The fee is charged on a per-incident basis. When calling HP, have the following information ready: product name and serial number, date of purchase, and description of the problem.

English	Ireland: +353 (0)1 662 5525 U.K.: +44 (171) 512-5202 International: +44 (0)171 512 52 02	Hebrew	+972 (0)9 9524848 (09:00-18:00 CET Sunday-Thursday)
Czech	+42 (0)2 6130 7310 (08:00-18:00 Monday-Thursday; 08:00-16:30 Friday)	Hungarian	+36 (0)1 382 1111
Danish	(45) 3929-4099	Italian	Italy: +39 02 264 10350
Dutch	Belgium: +32 (0)2 626 8806 Netherlands: +31 (0)20 606 8751	Norwegian	+47 22 11 6299
Finnish	+358 (0)203 47 288	Polish	+351 (0)1 3176333
French	Belgium: +32 (0)2 626 8807 France: +33 (0)1 43 62 34 34	Portuguese	Portugal: +7 095 797 3520 (09:00-18:00 CET)
German	Germany: +49 (0)180 52 58 143 (24PF/min) Austria: +43 (0)7114 201080	Russian	+27 86 000 1030 (08:00-17:00 CET)
Greek	+30 (0)1 689 64 11 (09:00-17:00 CET)	Spanish	Spain: +46 (0)8 619 2170
		Swedish	+41 (0)848 80 11 11
		Switzerland	+90 212 224 59 25
		Turkey	+44 (0)171 512 52 02

All other countries worldwide: Use the telephone number below for your country to obtain support during the warranty period.

Argentina	(541) 778 8380	Japan	+81 3 3335-8333
Australia	+61 3 8877-8000	Malaysia	+60 (3) 295 2566
Brazil	(011) 829 6612	Mexico	01 800 472 6684
Canada	(1) (905) 206-4663	Middle East/Africa	(41) (22) 780-7111
China	+86 (0)10 6564 5959	New Zealand	+64 (9) 356 6640
Chile	800 360 999	Philippines	+63 (2) 867 3551
Hong Kong	+85 (2) 2802 4098	Singapore	+65 272 5300
India	+91 11 682-6035	South Africa	+34 902 321 123
	+91 11 682-6069	Taiwan	+886 (2) 2717 0055
Indonesia	+62 (21) 350 3408	Thailand	+66 (2) 661 4000
Korea (Seoul)	+82 (2) 3270 0700	Venezuela	800 47 888
Korea (outside Seoul)	080 999-0700	Viet Nam	+84 (0) 8 823 4530

HP support

<p>Online services: for 24-hour access to information over your modem, we suggest these services:</p>	<p>World Wide Web URL - Firmware upgrades, printer drivers, updated HP printer software, plus product and support information may be obtained from the following URLs: for HP Digital Sender 8100C http://www.digitalsender.hp.com in the U.S. http://www.hp.com in Europe http://www2.hp.com Printer drivers may be obtained from the following sites: in Japan ftp://www.jpn.hp.com/drivers in Korea http://www.hp.co.kr in Taiwan http://www.hp.com.tw or the local driver website http://www.dds.com.tw</p>
<p>Obtaining software utilities and electronic Information:</p>	<p>See “HP customer support options worldwide” on page 67.</p>
<p>HP direct ordering for accessories or supplies:</p>	<p>Call 1-800-538-8787 (U.S.) or 1-800-387-3154 (Canada).</p>
<p>HP Support Assistant CD-ROM:</p>	<p>This support tool offers a comprehensive online information system designed to provide technical and product information on HP products. To subscribe to this quarterly service call 1-800-457-1762 in the U.S. or Canada; +31 555 384279 in Europe (0800 960 274 in the U.K.); (65) 740-4477 in the Asia/Pacific region; and 1-801-431-1587 in Latin America.</p>
<p>HP Service Information:</p>	<p>To locate HP-Authorized Dealers, call 1-800-243-9816 (U.S.) or 1-800-387-3867 (Canada).</p>
<p>HP Service Agreements:</p>	<p>Call 1-800-835-4747 (U.S.) or 1-800-268-1221 (Canada). Extended Service: 1-800-446-0522.</p>
<p>Locating HP Resellers</p>	<p>Hewlett-Packard appliances, peripherals, personal computers, supplies, and accessories are available at HP authorized resellers worldwide. To find the one nearest to you, contact: United States: 1-877-DSENDER (373-6337) Canada: 1-800-387-3867 Europe: http://www.hp.com and select Assistance and Other Countries</p>

A Specifications

Equipment specifications

Feature	Description
Product type	<ul style="list-style-type: none"> ● Flatbed and sheetfed
Scanning element	<ul style="list-style-type: none"> ● Charged-coupled device
Light source	<ul style="list-style-type: none"> ● Cold Cathode Fluorescent Lamp (CCFL)
Interface	<ul style="list-style-type: none"> ● Ethernet 10BaseT
Optical resolution	<ul style="list-style-type: none"> ● 600 dpi (dots per inch)
Maximum scanning speed	<ul style="list-style-type: none"> ● B/W sending quality: 4 pages per minute ● Color sending quality: 3 pages per minute ● Photo sending quality: 3.5 pages per minute
Image processing	<ul style="list-style-type: none"> ● Black-and-white documents ● Color documents ● Color and black-and-white documents ● High-resolution color and black-and-white photographs (print only)
Compression	<ul style="list-style-type: none"> ● Software: HP Smart Compression Imaging Technology utilizing CCIP, G4, and optimized JPEG compression
AC line voltage	<ul style="list-style-type: none"> ● 100 to 240 Vac, 50 to 60 Hz
Power consumption	<ul style="list-style-type: none"> ● 30 W idle ● 38 W operating
Noise pressure levels	<ul style="list-style-type: none"> ● 56 dB when operating the flatbed ● 68 dB when operating the ADF
Weight	<ul style="list-style-type: none"> ● 10.9 kg (24.0 lb)
Duty cycle	<ul style="list-style-type: none"> ● 3,300 pages per month
Control panel display	<ul style="list-style-type: none"> ● 240-by-64 pixels graphic LCD ● Blue dots on silver-gray background

Feature	Description
Keypad	<ul style="list-style-type: none">● 40-key alphabetic keypad● 12-key numeric keypad● Help key● Simplex/duplex key for single-sided or double-sided scanning● Green “go” button and red “stop” button● 4 context-sensitive function keys
Scan engine	<ul style="list-style-type: none">● Full-color and grayscale ADF (automatic document feeder) and flatbed scans● Image calibration● Color and tonal adjustment● Data scaling and enhancement
Automatic document feeder (ADF)	<ul style="list-style-type: none">● 25-page capacity● High feeding accuracy and reliability● Variety of paper sizes and weights● Correct order output● Automatic start and stop at any speed

Environmental ranges

Temperature	
Operating	10 to 35° C (50 to 95° F)
Storage	-40 to 60° C (-40 to 140° F)

Humidity	
Operating	10 to 80% noncondensing (10 to 35° C)
Storage	0 to 90%

CAUTION

The operating environment should be stable, with no abrupt changes in temperature or humidity, or your digital sender might be damaged. If you move the digital sender from a cold to a warm environment, wait about two hours before using it.

Supported capabilities

Operating capabilities

Description	Maximum
Multiple selections at control panel (combination of each individual e-mail address and each distribution list)	128
Destinations for an e-mail message (combination of all individual e-mail addresses and all addresses in selected distribution lists)	1,024
Destinations for a fax transmission	1,024
Characters in a telephone number	80

Memory capabilities

Description	Maximum
Users	4,096
Public e-mail addresses	200,000
Fax numbers	2,048
Size of public e-mail distribution lists	512
Number of public e-mail distribution lists	512
Size of fax distribution list	512
Number of fax distribution lists	512
Public HP JetSend-enabled printers	64
Size of personal e-mail address book	256
Number of personal distribution lists	100
Length of user's name	31
Length of display name	31
Length of user's password	15
Length of distribution list name	31
Length of fax number	79
Length of e-mail address	255

Declarations of Conformity

EU Declaration of Conformity

According to ISO/IEC Guide 22 and EN 45014

Manufacturer's Name: Hewlett-Packard Company

Manufacturer's Address: Greeley Hardcopy Division
700 71st Avenue
Greeley, Colorado 80634
USA

Declares that the product

Product Name: HP Digital Sender 8100C
Model Numbers: C7707 (may contain suffix)
Product Options: C7707

Conforms to the following specifications:

SAFETY	IEC 950:1991+A1:1992+A2:1993+A3:1995+A4:1996 EN 60950:1992 +A1:1992+A2:1993+A3:1995+A4:1997+A11:1997 EN 60825-1:1994 Class 1	
EMC	CISPR 22:1993+A1+A2, Class B/ EN 55022:1994+A1+A2, Class B IEC 1000-3-2:1995 / EN 61000-3-2:1995 IEC 1000-3-3:1994 / EN 61000-3-3:1995 EN 50082-1:1992	
	IEC 801-2:1991 / prEN 55024-2:1992	± 4 KV CD; ± 8 KV AD
	IEC 801-3:1984 / prEN 55024-3:1991	3 V/m
	IEC 801-4:1988 / prEN 55024-4:1992	± 1.0 KV power lines

Supplementary information:

The product herewith complies with the requirements of the Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC and carries the CE-marking accordingly.
LEDs in this product are Class 1 in accordance to EN60825-1.

Greeley, Colorado, USA, December 1999

Jodi Schilling - Quality Manager

European Contact: Your local Hewlett-Packard Sales and Service Office or Hewlett-Packard GmbH, Department ZQ/Standards Europe, Herrenberger Straße 130, D-71034 Böblingen (Fax: +49-7031-14-3143)

FCC Declaration of Conformity

Manufacturer's Name: Hewlett-Packard Company

Manufacturer's Address: Greeley Hardcopy Division
700 71st Avenue
Greeley, Colorado 80634
USA

Contact Person: GHC Regulatory Manager

Telephone: 970-350-5600

Product Name: HP Digital Sender 8100C

Model Numbers: C7707 (may contain suffix)

Product Options: C7707

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase separation between equipment and receiver.
- Connect equipment into an outlet on a circuit different from that to which the receiver is located.
- Consult your dealer or an experienced radio/TV technician.

Any changes or modifications to the digital sender that are not expressly approved by Hewlett-Packard could void the user's authority to operate this equipment. Only use the cables, connectors, power cords and accessories supplied with this equipment or expressly approved by Hewlett-Packard.

Test report on file: C7707-1

Date: December, 1999

German noise declaration

Geräuschemission

LpS <70 dB

am Arbeitsplatz

normaler Betrieb

nach DIN 45635 T. 19

Die Daten sind die Ergebnisse von Typprüfungen.

Index

Symbols

.tif format files 9
 /d code 50
 /dir code 50
 /f code 50
 /l code 50
 /p code 50
 /tr code 50

Numbers

2000 warranty 65

A

A4-sized paper 7
 AB Error message 56
 AC line voltage 71
 access rights,insufficient 61
 accessories and supplies
 ordering 66
 warranty 63
 accounts,invalid credentials 58
 acoustic emissions 71
 Acrobat Reader,website 9
 activity information 32
 adding
 addresses to distribution list 45
 addresses to public e-mail book 46
 HP JetSend devices 23
 lists to address book 44
 user profiles 41
 address books
 adding lists 44
 adding to public e-mail 46
 checking 38
 clearing database 39, 43
 control panel error messages 56
 deleting lists from 44
 descriptions 43
 error messages 56
 errors 57
 failure to initialize 61
 internal errors 61
 maintaining 44
 Address Caching Enabled setting 26
 addresses
 adding to distribution list 45
 deleting from distribution list 45

ADF (automatic document feeder)
 cable 14
 cleaning 52
 connector socket 14
 illustration 13
 maximum pages 7
 paper sizes supported 7
 specifications 72
 adjusting
 contrast for scanning 40
 contrast of display 47
 administrator
 activities 25
 changing password for 30
 description 11
 erasing password for 30
 tools 36
 Administrator E-mail parameter 26
 Administrator Full Name parameter 26
 administrator guide,part numbers 66
 Administrator Password parameter 26
 Adobe Acrobat Reader,website 9
 agreements,service 69
 Allow Guest Login parameter 26
 America Online support service 69
 AOL support service 69
 assigning IP address
 default timeout 17
 manually 27
 authorized dealers 69
 Auto BCC Function Enabled parameter 28
 automatic document feeder (ADF). *See* ADF
 (automatic document feeder)

B

B/W contrast,changing 40
 B/W Document,sending quality 8
 backing up
 address books 49
 codes 50
 device configuration 49
 backup utility 49
 Bad packets parameter 34
 Boot Block Ver. parameter 35
 BOOTP,using to assign IP address 17
 Box Version # parameter 34

C

capacity of ADF 7
 cards,connector to network interface 14
 changing
 administrator password 30
 contrast 40
 user profiles 41
 characters,maximum number of 74
 checking the address book database 38
 checklist for configuration 17
 cleaning
 ADF 52
 device 51
 scanner glass 51
 clearing,address book database 39
 codes
 for backing up and restoring 50
 internal messages 61
 Collisions parameter 34
 Color Document,sending quality 8
 color,sending 8
 Color-B/W Photo sending quality 8
 components
 hardware 12
 software 24
 compression features 71
 configuration
 checklist 17
 extended and optional 16
 minimum 16
 parameters in configuration menu 26
 preparing for 17
 resetting to factory defaults 37
 using the control panel 22
 configuration menu,parameters 26
 configuring
 e-mail 16
 e-mail parameters at control panel 20
 extended parameters 22
 HP JetSend devices 23
 I-fax 16
 I-fax parameters at control panel 21
 optional parameters 22
 conformity, declaration of 75
 connector socket 14
 connectors
 control panel cable 14
 control panel socket 14
 illustration 14
 power socket 14
 print server 14
 consumption, power 71
 contrast
 changing 40
 changing display 47

control panel
 assigning IP address from 17
 changing contrast 47
 configuring device 22
 configuring e-mail parameters 20
 configuring I-fax parameters 21
 connector cable 14
 illustration 12
 maximum number of selections 74
 messages 56
 socket connector 14
 specifications 71
 controlling access to device 31
 convenience copying
 description 10
 maximum number of printers 74
 copies,e-mail messages 36
 copying,convenience 10
 creating,user profiles 41
 customer support options worldwide 67
 cycle, duty 71

D

database of address books
 checking 38
 clearing 39
 errors 57
 date
 firmware 34
 setting for digital sender 26
 Date parameter 26
 dealers, authorized 69
 declaration of conformity 75
 decreasing,contrast 40
 defaults
 FROM field in e-mail messages 28
 image quality for e-mail messages 28
 IP address timeout 17
 resetting to factory 37
 SUBJECT field in e-mail messages 28
 defects
 product 63
 software 64
 deleting
 addresses from public e-mail address book 46
 lists from address book 44
 delivery,notification of e-mail 36
 description,security 11
 destinations
 fax 10
 from digital sender 9
 DHCP,using to assign IP address 17
 diagnostics,administrator tools 36
 displaying,revision page 33

- distribution lists
 - adding addresses 45
 - deleting addresses 45
 - maintaining 44
 - maximum number of destinations 74
 - distribution services 9
 - DNS (Domain Name System)
 - configuration problem 56
 - support 9
 - DNS Domain parameter 27
 - DNS Server Address parameter 27
 - document input tray 12
 - document lever 12
 - document output tray 12
 - documentation, part numbers 66
 - documents, sending color 8
 - dots per inch (dpi), resolution 71
 - dpi (dots per inch), resolution 71
 - drivers, printer 69
 - duty cycle 71
- E**
- e-mail
 - address book description 43
 - configuration 16
 - configuring parameters at control panel 20
 - copies of messages 36
 - dependencies 6
 - invalid credentials 58
 - maximum number of destinations 74
 - not configured 57
 - notification of delivery 36
 - e-mail addresses
 - adding to public e-mail address book 46
 - deleting from public e-mail address book 46
 - maximum number 74
 - E-mail Default From parameter 28
 - E-mail Default Subject parameter 28
 - E-mail File Format parameter 28
 - E-mail File Selection parameter 29
 - E-mail Language parameter 29
 - E-mail Quality parameter 28
 - E-mail Server Addr. parameter 28
 - e-mail server unavailable 57
 - e-mail service
 - configuration problem 57
 - description 9
 - Engine FW Ver. parameter 35
 - environmental specifications 73
 - equipment
 - components 12
 - specifications 71
 - erasing, administrator password 30
 - Error status 34
 - errors, in address book 57
 - ESMTP Function Enabled parameter 29
 - ESMTP support 9
 - Ethernet interface 71
 - extended configuration 16
 - extended parameters, configuring 22
 - Extended SMTP support 9
- F**
- factory defaults, resetting to 37
 - Fax # Prefix setting 29
 - Fax Account E-mail parameter 29
 - Fax File Format parameter 29
 - Fax numbers, maximum number of addresses 74
 - Fax Postage parameter 29
 - Fax Provider Domain parameter 29
 - fax service, description 10
 - fax, dependencies 6
 - faxing, maximum number destinations 74
 - features, compression 71
 - file formats
 - for e-mail 28
 - I-fax 29
 - firmware
 - print server version 34
 - scanner engine 35
 - upgrading device 48
 - version 34
 - Framing err. parameter 34
 - FROM field in e-mail messages 28
 - FW Date parameter 34
 - FW Ver parameter 34
- G**
- G4 compression 71
 - Gateway Addr. status 34
 - gateway server, default 34
 - German noise declaration 77
 - glass
 - cleaning scanner 51
 - scanner 13
 - guest login 31
 - guest users, description 11
- H**
- hardware
 - components 12
 - internal problems 61
 - repair assistance 67
 - specifications 71
 - warranty 63
 - HP authorized dealers 69
 - HP JetDirect Cfg. parameter 35
 - HP JetDirect FW Rev. parameter 34
 - HP JetDirect ID parameter 35
 - HP JetDirect Prd. # parameter 34

- HP JetDirect printer servers
 - connector to card 14
 - firmware version installed 34
 - ID 35
 - not responding 58
 - product number installed 34
 - timeout 35
 - troubleshooting 62
 - HP JetDirect Timeout parameter 35
 - HP JetSend, configuring devices 23
 - HP Smart Compression Imaging Technology 71
 - HP Support Assistant compact disc 69
 - HP Web JetAdmin 24
 - humidity, specifications 73
- I**
- ID, HP JetDirect printer server 35
 - I-fax
 - configuration problem 57
 - configuring 16
 - configuring at control panel 21
 - dependencies 6
 - fax file format 29
 - not configured 58
 - support 10
 - image processing options 71
 - image quality, default for e-mail messages 28
 - image, compression 71
 - inconsistent
 - DNS configuration 56
 - e-mail configuration 57
 - incorrect passwords 60
 - increasing, contrast 40
 - initializing address books, failure to 61
 - Initializing TCP/IP status 34
 - installation, testing 24
 - installing, digital sender 15
 - insufficient access rights 61
 - interface cards, troubleshooting 62
 - interface type 71
 - internal errors 58
 - internal failure 61
 - internal problems 61
 - Internet fax. *See* I-fax
 - invalid credentials 58
 - invalid passwords 58
 - IP address
 - assigning manually 27
 - default timeout 17
 - on self-test page 34
 - IP Address parameter 27, 34
 - IP Configuration parameter 27
 - IP Gateway parameter 27
 - IP Subnet Mask parameter 27
- J**
- Jet Direct. *See* HP JetDirect printer server
 - JetSend. *See* HP JetSend
 - job queue, status 32
 - Job State screen 32
 - jobs
 - description of status 32
 - finding status 32
 - JPEG compression 71
- K**
- keypad, specifications 72
- L**
- LAN hardware address 34
 - LAN interface 71
 - Language parameter 26
 - language support options 67
 - languages, manuals in other 66
 - Late collisions parameter 34
 - LCD, changing contrast level 47
 - LDAP (Lightweight Directory Access Protocol)
 - configuration problem 58
 - protocol error 58
 - server unavailable 59
 - support 5
 - LDAP Account Name parameter 29
 - LDAP Password parameter 29
 - LDAP Search Root parameter 29
 - LDAP Server Address parameter 28
 - LDAP Service Port parameter 29
 - Legal-sized paper 7
 - Letter-sized paper 7
 - levers
 - document 12
 - locking 14
 - light source for scanning 71
 - line voltage 71
 - locking lever 14
 - Log Server Addr. parameter 35
- M**
- MAC address parameter 34
 - Mail Ping Frequency parameter 29
 - maintaining
 - device 51
 - user profiles 41
 - manuals
 - in other languages 66
 - part numbers 66
 - Max User Mail Size parameter 29
 - maximum paper size, in ADF 7
 - media. *See index entry for specific type of media*
 - memory, capabilities 74

- messages
 - control panel 56
 - internal error 61
 - network error 59
- MIME support 9
- minimum
 - configuration 16
 - paper size in ADF 7
- modes, sending 8
- modifying, user profiles 41
- Multi-Boot Ver. parameter 35
- N**
- network
 - collisions 34
 - connector to interface card 14
 - error codes 59
 - errors on job state screen 32
 - framing errors 34
 - operating systems supported 6
 - packets 34
 - problems connecting to 62
 - server type 6
 - supported protocols 6
 - troubleshooting interface card 62
- no matches found message 59
- noise
 - German declaration 77
 - levels 71
- notification, e-mail delivery 36
- numbers, product and part 66
- NW Error status 32
- O**
- object not found message 59
- online support services 69
- operating
 - humidity specification 73
 - temperature 73
- operating systems, supported networks 6
- optical resolution 71
- optional configuration 16
- optional parameters, configuring 22
- overview, digital sender 5
- P**
- packets, network 34
- papers
 - capacity of ADF 7
 - displaying Revision 33
 - displaying Tasks 35
 - Revision 55
- pages per minute, scanning speed 71
- paper
 - maximum in ADF 7
 - sizes supported 7
 - specifications 7
 - weights supported 7
- Paper Size parameter 26
- parameters
 - configuration menu 26
 - configuring e-mail at control panel 20
 - configuring extended and optional 22
 - configuring I-fax 21
- part numbers 66
- partial results message 59
- parts, of product 12
- passwords
 - changing administrator 30
 - description 11
 - do not match 60
 - erasing administrator 30
 - incorrect 60
 - invalid 58
 - LDAP (control panel) 29
- performance
 - paper handling 7
 - scanning speed 71
- permissions, using device 31
- Personal E-Mail address books
 - description 43
 - maximum destinations in a list 74
 - maximum number of addresses 74
 - maximum number of lists 74
- photographs, sending 8
- post-processing error status 32
- power connector socket 14
- power switch 14
- power, consumption 71
- PP Error status 32
- ppm, scanning speed 71
- print server, connector to card 14
- printers
 - drivers 69
 - maximum number for convenience copying 74
 - sending to 10
- printing, dependencies 6
- Processing status 32
- product version 34
- profiles, creating and maintaining user 41
- programs, installed for digital sender 24

- protocols
 - dependency on 6
 - supported 6
 - used for e-mail 9
 - Public E-Mail address book
 - adding addresses 46
 - deleting addresses 46
 - description 43
 - maintaining 46
 - maximum number of addresses 74
 - maximum number of lists 74
 - public lists
 - adding lists 44
 - deleting lists from 44
 - maintaining 44
 - Public Printers address book, maximum number of printers 74
- Q**
- quality
 - B/W Document 8
 - Color Document 8
 - Color-B/W Photo 8
 - quality modes 8
 - queue, jobs in 32
- R**
- Reader, website 9
 - Ready status 34
 - receipts, e-mail delivery 36
 - Received pkts parameter 34
 - registered users
 - deleting 42
 - description 11
 - repair and replacement 63
 - repair assistance 67
 - replacement and repair 63
 - replacement parts 66
 - resetting, factory defaults 37
 - resolution, optical 71
 - restarting the digital sender 36
 - restore utility 49
 - restoring
 - address books 49
 - codes 50
 - device configuration 49
 - Revision page
 - displaying 33
 - troubleshooting with 55
 - Running Image # parameter 35
- S**
- scanner
 - specifications 72
 - type of 71
 - scanner glass
 - cleaning 51
 - illustration 13
 - scanning
 - changing contrast 40
 - setting size of area 26
 - speed 71
 - scanning element 71
 - search error message 60
 - security
 - controlling access 31
 - description 11
 - sending modes 8
 - Sending status 32
 - sending, to e-mail 9
 - Sent status 32
 - servers
 - dependencies on 6
 - e-mail unavailable 57
 - LDAP unavailable 59
 - log 35
 - service agreements 69
 - service and support
 - language options 67
 - options worldwide 67
 - settings
 - Color Document 8
 - Color-B/W Photo 8
 - time on digital sender 26
 - setup, digital sender 15
 - shutting down the digital sender 36
 - sizes
 - setting for scanning area 26
 - supported paper 7
 - Smart Compression Imaging Technology 71
 - SMTP protocol, sending to e-mail 9
 - sockets
 - connectors 14
 - control panel cable 14
 - power connector 14
 - software
 - components 24
 - compression 71
 - internal problems 61
 - utilities 69
 - warranty 63
 - specifications
 - environmental 73
 - equipment 71
 - keypad 72
 - paper handling 7
 - speed, scanning 71

- starting the digital sender 36
 - status
 - device 32
 - job 32
 - stopping the digital sender 36
 - storage
 - humidity specification 73
 - temperature 73
 - SUBJECT field in e-mail messages 28
 - subnet mask
 - for IP address 27
 - on self-test page 34
 - parameter 34
 - supplies and accessories
 - ordering 66
 - warranty 63
 - support agreements 69
 - support and service
 - language options 67
 - options worldwide 67
 - Support Assistant compact disc 69
 - supported
 - .tif files 9
 - fax services 10
 - paper sizes 7
 - switches,power 14
- T**
- Tasks page,displaying 35
 - TCP/IP
 - configuration 35
 - dependency on 6
 - status parameter 34
 - telephone numbers, maximum number of characters
 - 74
 - temperature
 - operating 73
 - storage 73
 - testing,installation 24
 - Time parameter 26
 - timeout
 - default IP address 17
 - HP JetDirect printer server 35
 - Token Ring interface 71
 - tools
 - for administrator 36
 - troubleshooting 50, 55
 - Transm. pkts. parameter 34
 - transmission packets 34
 - trays
 - document input 12
 - document output 12
 - troubleshooting
 - administrator tools 36
 - cleaning device 51
 - DNS configuration 56
 - e-mail configuration 57
 - errors in address books 57
 - HP JetDirect printer servers 62
 - I-fax configuration 57
 - information on 55
 - internal errors 58, 61
 - LDAP configuration 58
 - network errors 59
 - network interface card 62
 - repair assistance 67
 - Revision page 55
 - sources for information 50
 - testing installation 24
 - tools 55
 - WINS configuration 61
 - types of users 11
- U**
- upgrading,device firmware 48
 - user guide,part numbers 66
 - User Self-registration Enabled setting 26
 - user's e-mail addresses
 - description 43
 - user's e-mail lists,description 43
 - users
 - creating and maintaining profiles 41
 - deleting profiles 42
 - maximum number 74
 - name not found 60
 - not registered 60
 - types 11
 - utilities, software 69
- V**
- versions
 - boot block 35
 - firmware 34
 - multi-boot program 35
 - print server firmware 34
 - product 34
 - scanner firmware 35
 - voltage, AC line 71
- W**
- warranty
 - hardware 63
 - software 63
 - year 2000 65
 - watts consumed 71
 - Web JetAdmin. *See* HP Web JetAdmin
 - websites
 - Adobe Systems Incorporated 9
 - firmware upgrade 48
 - weight
 - digital sender 71
 - paper 7

WINS (Windows Internet Naming Service), configuration problem 61
WINS Server Address parameter 28
World Wide Web support service 69
worldwide, support options 67
WWW support service 69

Y

Y2K warranty 65
year 2000 warranty 65



Copyright© 2000
Hewlett-Packard Company
Manual Part No. C7707-90006

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>