

MA4.2s

Light weight, high performance power amplifier

features

- ▶ Switch mode power supply
- ▶ Superior sonic performance
- ▶ Light weight
- ▶ Advanced protection circuits
- ▶ Efficient copper cooling system
- ▶ Minimum load switches (MLS™)



applications

- ▶ Live sound reinforcement
- ▶ Fixed installations

The MA4.2s is one of a range of power amplifiers that have been designed to combine reliability and high power with sonic excellence. Utilising an advanced switch mode power supply, the amplifier is characterised by a very high power-to-weight ratio in a lightweight, 2U package. The innovative technology at the heart of the MA4.2s enables it to set new standards in terms of sonic accuracy, impact and clarity.

technical specifications

MAX OUTPUT POWER

EIA AT 1 kHz AND 1% THD

MLS in 0dB position	
8 PER CHANNEL	1300 W
4 PER CHANNEL	2300 W
2 PER CHANNEL	2900 W
8 BRIDGED	4600 W
4 BRIDGED	5800 W

MAX OUTPUT VOLTAGE

8Ω LOAD	102 Vrms
PEAK VOLTAGE, NO LOAD	145 V

DISTORTION

THD 20Hz – 20kHz AND 1 W TO FULL POWER	0.1%
THD AT 1kHz AND –1dB UNDER CLIP	0.04%
DIM AT –3dB UNDER CLIP	0.04%

HUM AND NOISE

	< -105dB
--	----------

CHANNEL SEPARATION @ 10kHz

	80dB
--	------

OUTPUT IMPEDANCE

	60 mΩ
--	-------

SLEW RATE

	20 V/μs
--	---------

INPUTS

GAIN SELECTABLE (dB)	20, 23, 26, 29, 32, 35, 38, 41
IMPEDANCE	10 kΩ
COMMON MODE REJECTION	50dB

FRONT PANEL

GAIN CONTROLS	31 position detent
INDICATORS: PROTECT	Yellow LED
INDICATORS: CLIP	Red LED
INDICATORS: SIGNAL PRESENT (-40dB)	Green LED

REAR PANEL

INPUT CONNECTORS	Neutrik Combo
LINK CONNECTOR	XLR-male
CLIP LIMITERS	On/off each channel
MLS SWITCH	0, -2, -4, -5dB
LINK-SWITCH	CH. A-B

POWER

OPERATION VOLTAGE	130-270V
SOFT START	Yes
PEAK INRUSH CURRENT	5 A
FULL OUTPUT POWER	180-260 W
MIN START VOLTAGE	175 V
115V OPTION	Yes

CURRENT DRAW AT 4Ω/230V

QUIESCENT POWER (NO LOAD)	0.6 A rms
1/8 OF FULL POWER (-9dB)	6 A rms
1/3 OF FULL POWER (-5dB)	14 A rms
AT FULL POWER (0dB) @ 1kHz 1%THD	26 A rms


DIMENSIONS

WIDTH	483mm (19ins)
HEIGHT	88mm (3.5ins) 2U
DEPTH (incl. handles)	393mm (15.5ins)

WEIGHT

	10kg (22lbs)
--	--------------

overall dimensions

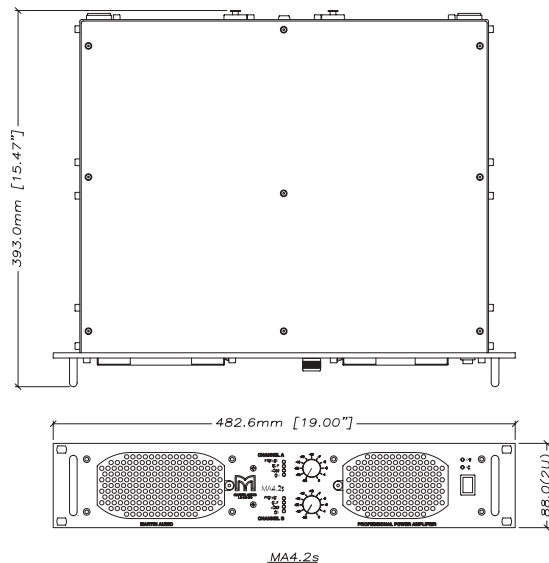

Century Point, Halifax Road, Cressex Business Park,
High Wycombe, Buckinghamshire HP12 3SL, England.
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669
E-mail: info@martin-audio.com
All information is Copyright © 2003 Martin Audio Ltd.



www.martin-audio.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>