



Miniview Symphony Multi-function 4-Port KVM Switch (GCS1774)  
Miniview Symphony Multi-function 4-Port KVM Switch, KVM/USB2.0 Peripherals Networking/Audio, 4-Port



Model # GCS1774

## Description


IOGEAR's Symphony multi-function 4-Port KVM Switch represents the new wave in KVM technology. The Symphony allows you to control four computers using a single VGA monitor, USB keyboard and mouse. In addition, it has a built-in USB 2.0 hub, Ethernet 10/100 switch, and audio sharing capabilities. With its built-in USB 2.0 High Speed hub, slow transfer rates are a thing of the past. Fully compatible with USB 2.0 standards, this KVM allows you to share your USB peripherals and transfer data at up to 480 Mbps. In addition, the audio ports allow you to connect one set of speakers and microphone, and share them among your computers. To complement your KVM setup, IOGEAR's Symphony KVM sports a full-featured Ethernet 10/100 switch. This built-in Ethernet switch allows you to easily network and share internet with your computers. Among its many features, it supports auto-sensing, 10/100 Mbps speed, and is fully compliant with 802.3 networking standard.

## Features

- Four 6 ft (1.8m) cables included
- Multi-function USB KVM switch integrates a USB 2.0 hub, Ethernet switch, and audio
- Controls four computers with a single VGA monitor, USB keyboard and mouse
- Built-in USB 2.0 peripheral sharing to share printers, scanners, hard drives, etc., with data transfer rates of up to 480 Mbps.
- Built-in 5 port 10/100 Mbps Ethernet switch allows you to easily network and share Internet with your computers
- Share one set of speakers with all your computers
- Independent switching of KVM, USB peripherals, and audio focus
- Port selection via Hotkeys and front push-buttons
- Auto scan mode for monitoring all computers
- Power on detection – automatically switches to the first powered on port
- Superior video quality - up to 2048 x 1536
- Firmware upgradeable
- Easy installation – no software required
- Keyboard and mouse emulation for error-free boot up
- Hot pluggable – add or remove computers without powering down the switch
- Compatible with multiple operating platforms (PC, Mac, and Sun)



## Function Diagram

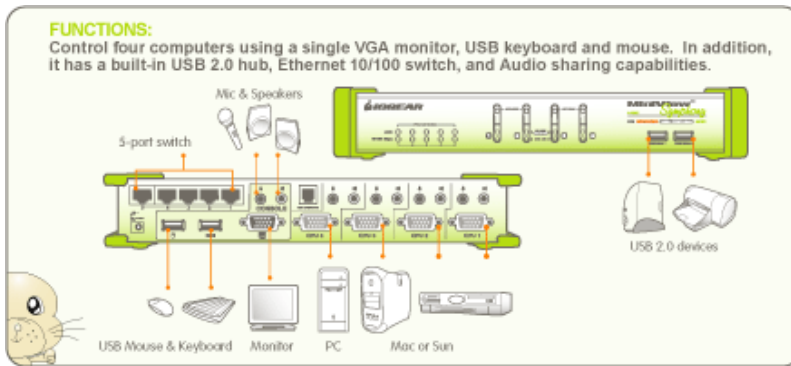

## Requirements

### CONSOLE

- VGA or SVGA monitor
- USB style mouse
- USB style keyboard

### COMPUTER

- 1 x VGA or SVGA port
- 1 x Type A USB port for keyboard/mouse cable
- 1 x Type A USB 2.0 port for USB hub cable
- Supports Windows 98SE/ME/2000/XP; Mac OS 8.6 or higher; Solaris; Linux

### AUDIO

- Requires 2-piece powered speaker system

## Package Content

- 1 x GCS1774 4-Port KVM Switch
- 4 x Custom 6' (1.8m) KVM cables
- 1 x Firmware upgrade cable
- 1 x Power adapter
- 1 x User manual
- 1 x Quick start guide

## Specifications

| Function              | GCS1774                         |
|-----------------------|---------------------------------|
| Resolution            | 2048 x 1536                     |
| Operating Temperature | 0-50 Celsius                    |
| Port Selection        | Hotkeys or Front Panel switches |
| Storage Temperature   | -20-60 Celsius                  |
| LAN Connection        | 10/100 Mbps                     |
| Scan Interval         | 1-99 secs (5 sec default)       |
| Power Consumption     | DC 5.3V; 5W; 1000mA             |
| Humidity              | 0-80% RH                        |
| Cable Length          | 6 ft                            |
| <b>CPU Connectors</b> |                                 |
| Mouse                 | USB                             |

|             |              |
|-------------|--------------|
| Keyboard    | USB          |
| Monitor     | HDB-15       |
| Peripherals | USB 2.0 port |

|                             |          |
|-----------------------------|----------|
| <b>**** Unit Dimensions</b> |          |
| Width                       | 3.5 in   |
| Height                      | 2.19 in  |
| Length                      | 10.63 in |

#### Weight

|                   |           |
|-------------------|-----------|
| Unit Pack Wt.     | 5.51 lbs  |
| Unit Wt.          | 2.03 lbs  |
| Master Carton Wt. | 18.74 lbs |

|                |       |
|----------------|-------|
| <b>Housing</b> |       |
| Case           | Metal |

#### Power

|         |                   |
|---------|-------------------|
| Voltage | 1 x DC 5.3V; 2.4A |
|---------|-------------------|

|                           |                       |
|---------------------------|-----------------------|
| <b>Console Connectors</b> |                       |
| Keyboard                  | 1 x USB Type A female |
| Mouse                     | 1 x USB Type A female |
| Audio                     | 1 x speaker; 1 x mic  |
| Flash ROM Upgrade         | 1 x RJ-11             |
| Monitor                   | 1 x HDB-15 female     |

#### LEDs

|                 |           |
|-----------------|-----------|
| LAN             | 5 (green) |
| Link            | 5 (green) |
| USB Peripherals | 2 (green) |


|                             |   |
|-----------------------------|---|
| <b>Computer Connections</b> |   |
| Direct                      | 4 |

#### \*\*\* Unit Package Dimensions

|        |          |
|--------|----------|
| Width  | 8.35 in  |
| Length | 12.91 in |
| Height | 3.98 in  |

|                        |          |
|------------------------|----------|
| <b>* Master Carton</b> |          |
| Height                 | 9.17 in  |
| Width                  | 12.76 in |
| * Master Carton Qty.   | 3        |
| Depth                  | 13.58 in |

© 2006 IOGEAR, Inc. All other trademarks belong to the respective owners.

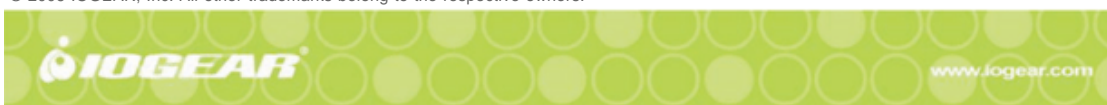

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>