

SX-1000U USB Device Server




Ideal for Networking Multi-Function & All-In-One Printers

Intuitively share USB devices directly on your LAN

Features & benefits:

- **Convert your Multi-Function or All-In-One printer to a network resource.** Instantly allows your family members or co-workers to print, scan, fax and store from anywhere across the Local Area Network, taking full advantage of its capabilities including the printer's status monitoring and other MFP/AIO software compatibility.
- **Perfect for use with various USB devices** such as USB hard drives, CD/DVD/Zip drives, MP3 players, scanners, printers and digital cameras, enhancing fun and convenience while maximizing the return on your USB device investment.
- **The bundled utility "SX-Virtual Link" allows the user to visually manage all the connected USB devices in the LAN.** This intelligent utility provides you with device availability on a real-time basis. It can also automatically launch the USB device application software utility when the device is connected to your PC through the SX-1000U.

Networking example:

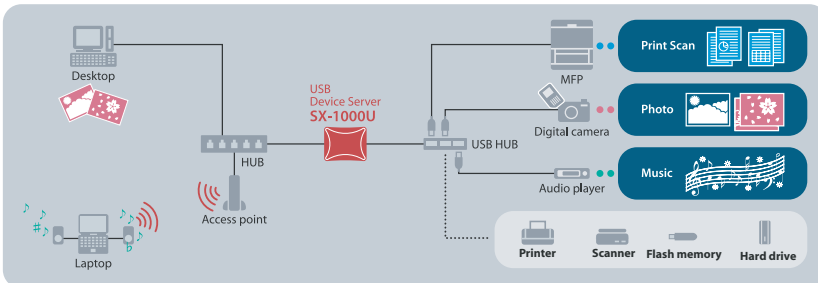

Technical Specifications:

| | |
|---|--|
| Supported Operating Systems | Windows 2000, Windows XP |
| Supported protocol | TCP/IP |
| Device interface | USB 2.0 Full Speed (A-Type) x 1 |
| Network interface | 10 BASE-T / 100 BASE-TX (Auto-detection) |
| Total number of USB interface connections | 15 (When used with a USB hub) |
| Configuration | Web browser, Quick Setup |
| Languages (Installation utility) | English, Japanese |
| Power supply | Universal AC adapter (AC100 - 240V) |
| Power consumption | 5W (DC5V 1.0A) |
| Warranty | 2 years |
| Regulatory approvals | FCC, CE, VCCI Class B |
| Package contents | SX-1000U, Setup Guide, AC adapter, Warranty booklet, CD-ROM with configuration utilities and PDF manuals |
| Dimensions | 3.1 x 3.9 x 1.1 in / 80 x 100 x 28 mm |
| Weight | 3.5 oz / 100 g |

* The SX-1000U does not currently support USB devices using isochronous data transfer mode, such as web cameras & speakers. Some USB devices may not be supported depending on the USB device driver specification. Contact one of silex support locations or visit our web site for the latest compatibility information.

silex technology is a registered trademark of silex technology, Inc. Other product or brand names may be registered trademarks or trademarks of their respective owners. Technical information and specifications are subject to change without notice. ©2004 silex technology, Inc. All rights reserved.

silex global sales & support locations

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>