



## 1-Port Multi-Function Print Server TW100-MP1UN (V1.0R)

The 1-Port Multi-Function Print Server turns once standalone multi-function USB printer/fax/scanners into a shared resource on your network.

Unlock the power of your multi-function printer by giving everyone on your Local Area Network full control over the device from their workstation.

Experience print, scan and fax simplicity with an intuitive management interface. LED indicators, bi-directional support and e-mail notifications improve the user experience. Works with most Windows based operating systems.

### FEATURES

- Share a multi-function printer on a Local Area Network
- Supports most USB printers and All-In-One multi-function printers
- Easy to use Windows based utility program and Web based configuration
- Includes one USB 2.0 port and one RJ-45 10/100Mbps auto-sensing Fast Ethernet port
- 3-year limited warranty

# 1-Port Multi-Function Print Server


## TW100-MP1UN (V1.0R)

### SPECIFICATIONS

Hardware	
Standards	• Wired: IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Printer Interface	• USB 2.0, 1.1 Compliant USB Type A Port
LAN Port	• 10/100Mbps Auto-Negotiation UTP/STP Ethernet Port
Diagnostic LEDs	• Power/Link, Error
Transport Protocols	• TCP/IP
TCP/IP Protocol Supported	• DHCP
Supported OS	• Windows 2000/XP/2003 Server/Vista (32-Bit)
Management	• Windows Based Utility or Web Based Configuration
Power	• 5V DC 2A external power adapter
Power Consumption	• Max 2.5W (Without a Peripheral)
Dimensions	• 115 x 85 x 30mm (4.5 x 3.4 x 1.2 inches)
Weight	• 128g (4.5oz.)
Temperature	• Operating: 0°~50°C (32°~122°F) • Storage: -25°~55°C (-13°~131°F)
Humidity	• 10%~90% (Non-Condensing)

### NETWORKING SOLUTIONS

#### 1-Port Multi-Function Print Server (TE100-MP1UN)

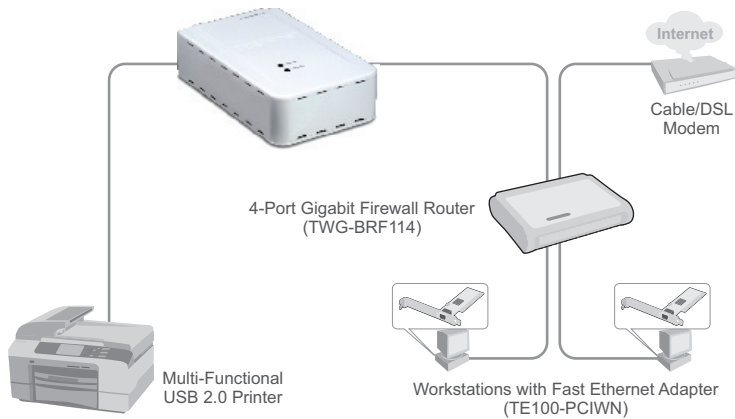

### PACKAGE CONTENTS

- TE100-MP1UN
- Multi-Language Quick Installation Guide
- CD-ROM (Utility and User's Guide)
- Power adapter (5V DC, 2A)

### RELATED PRODUCTS

TEW-MP1U	1-Port Wireless G Multi-Function USB Print Server
TEW-MP2U	54Mbps 802.11g Wireless 2-Port Multi-Function USB 2.0 Print Server

### ORDERING INFORMATION

#### TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA  
 Tel: 1-888-777-1550  
 Fax: 310-891-1111  
 Web: [www.trendnet.com](http://www.trendnet.com)  
 Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>