


16x16 HD/SDI Video Only Router

Model 862-XL1616HD/1

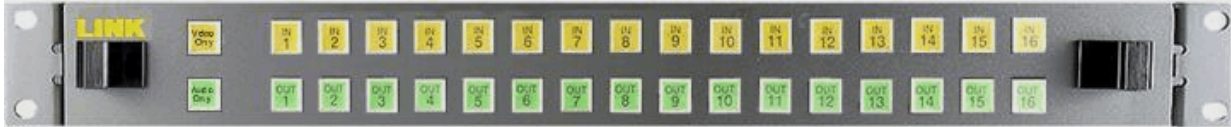

- ◆ **16X16, HD/SDI, Video Only**
- ◆ **Local or Remote Control Panel**
- ◆ **AFV, breakaway, or X-Y Control**
- ◆ **Maximum of 256 Remote Panels**
- ◆ **RS-232 Serial Control, Standard**

The 800 Series Routing Switchers are wide bandwidth vertical interval switchers designed for professional video production facilities. The compact design of Link's routing switchers makes them an essential part of any facility.

Packaged in a 19" rack mountable chassis, the switchers are supplied with a single front-loaded power supply. An optional redundant power supply is available. High quality front panel push buttons are used for selection of inputs and outputs.

Remote control panels are interconnected with standard Ethernet 10Base2 single coax connections. RS-232 is provided through a standard D-sub connector. Panels can be set to control a single output bus or the entire matrix.

The 862-1616V is a high definition video router that also supports SDI.

The Link 16 x16 HD/SDI routing system features:

- Modular Design – plug-in modules for video & audio. No active components on the frame.
- Two power supply slots are accessible from the front panel. One power supply is standard.
- A redundant power supply is available as an option.
- Detachable X-Y front panel control with Ethernet 10Base2 coax connection.
- HD/SDI video only models are available with analog or AES audio follow video.
- RS-232 control is standard.
- The 16X16 Video switcher is in a 1 RU and the audio follow in a 1 RU
-

Remote Mounting Kits for Control Panels

The supplied control panel for all switchers is shipped installed into the front of the main electronics chassis. The control panel can be removed from the electronics chassis in the field and installed into a remote mounting kit. The mounting kit hardware includes rack-mounting hardware for the control panel, a blank panel(s) that is installed onto the front of the electronics chassis, and a power supply. Order the appropriate rack mounting kit from the list below:

862-XL1616HD/1	16 x16 HD/SDI Video Only Routing Switcher	One Rack
862-XL1616HD/3	16 x16 HD/SDI Video Routing Switcher with Stereo Audio Follow Control Panel	One Rack
862-XL1616HD/2	16 x16 HD/SDI Video Routing Switcher with AES Audio Follow Control Panel	One Rack

LINK ELECTRONICS, INC. 2137 Rust Avenue Cape Girardeau, MO 63703-7668

Phone 573 334 4433 FAX 573 334 9255

16X16 HD/SDI Routing Switching Systems

Model 862-XL1616HD/1

SDI VIDEO INPUT:

Data Rate: 270,Mbps 360Mbps, 540Mbps, 1.4835 Gbps
Data Type: SMPTE 259M, SMPTE 292M, SMPTE 344M, DVB-ASI
Number Inputs: 16
Input Cable Equalization: Automatic up to 300 meters@270 Mbps, 100 meters @ 1.485Gbps
Video Level: 800 mV +/- 10%
Impedance: 75S Looping
Coupling: DC
Connector: BNC
Return Loss: >15 dB @ 1.485Gbps

SDI VIDEO OUTPUTS:

Number: 16
Connector: BNC
Level: Unity Gain,±0.1 dB
Character Video: 90 IRE Units
Return Loss: >15dB @ 1.485Gbps
Impedance: 75S ±1%
Vertical Interval Switching: Line 6, NTSC
Differential Gain: 0.10%, 10% to 90% APL
Differential Phase: 0.10°, 10% to 90% APL
Crosstalk: 62dB
Propagation Delay: 5 nS, typical
Hum and Noise: >60dB to 5 Hz
DC Offset: <25mV
Line Rate Tilt: <0.1%
Field Rate Tilt: <0.1%
SNR: -73dB
Output Jitter: <25 ps

ENVIRONMENTAL:

Temperature: 0° to 50° C ambient
Humidity: 10%/90% non-condensing
Power: 9.5 VAR
AC Voltage: 120/240 VAC±10%, 50/60Hz

MECHANICAL:

Height: 1.75 inches
Width: 19 inches
Depth: 9.25 inches
Weight: 9lbs



LINK ELECTRONICS, INC. 2137 Rust Avenue Cape Girardeau, MO 63703-7668
Phone 573 334 4433 FAX 573 334 9255

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>