



# CM1750EXT/CM1750EXT-BK Extension Tube C219M-A (6/04) Installation Instructions

The CM1750EXT/CM1750EXT-BK extension tube extends the length of the BS1750/CM1750/CM1750-BK/TB1750 universal camera mounts. The gray (CM1750EXT) or black (CM1750EXT-BK) 4-inch (10.16 cm) x 1-inch (2.54 cm) aluminum extension tube is used on the camera mounts to install cameras weighing a maximum 7 lbs (3.18 kg).

For more information about the BS1750/CM1750/CM1750-BK/TB1750 camera mounts, refer to the C218M-B manual.

## INSTALLATION

**NOTE:** The CM1750EXT/CM1750EXT-BK extension tube and BS1750/CM1750/CM1750-BK/TB1750 camera mounts are not recommended for use with enclosures.

1. Refer to Figure 1. Disassemble the existing tube from the top of the mount flange. To do this, use a 3/16-inch hex wrench (not provided) to unscrew the 1/4-20 hex head socket screw, and set the screw aside.
2. Attach the CM1750EXT/CM1750EXT-BK extension tube onto the mount flange. Turn the extension tube until the flange locking pin drops into the hole in the extension tube. Insert the 1/4-20 hex head socket screw into the flange. Tighten the screw firmly onto the extension tube using a 3/16-inch hex wrench (not provided).

**NOTE:** Be sure the end of the CM1750EXT/CM1750EXT-BK extension tube that has a countersunk threaded hole and locking pin hole is attached to the top of the mount flange.

3. Attach the existing tube onto the CM1750EXT/CM1750EXT-BK extension tube. Insert the CM1750EXT/CM1750EXT-BK extension tube 1/4-20 screw into the existing tube's threaded hole. Tighten the two tubes together firmly.


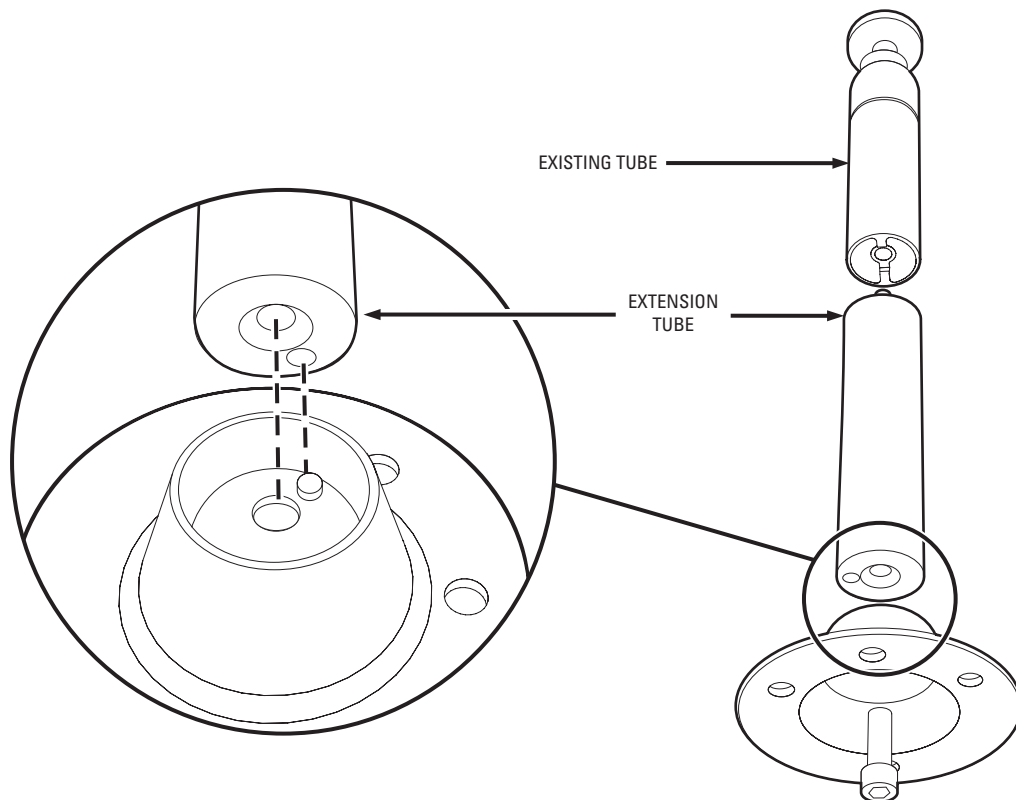


Figure 1. Installing the Extension Tube

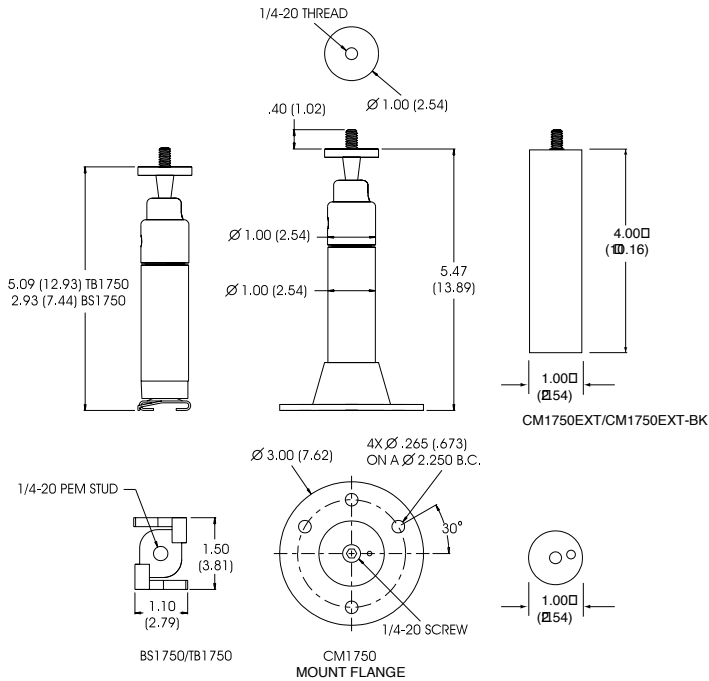

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES

Figure 2. CM1750EXT/CM1750EXT-BK and BS1750/CM1750/CM1750-BK/TB1750 Dimension Drawing

## WARRANTY AND RETURN INFORMATION

### WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship for a **period of one year** after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years on the following fixed camera models: CC3701H-2, CC3701H-2X, CC3751H-2, CC3651H-2X, MC3651H-2, and MC3651H-2X.
- Three years on all other fixed camera models (including Camclosure® Integrated Camera Systems) and Genex® Series (multiplexers, server, and keyboard).
- Two years on all standard motorized or fixed focal length lenses.
- Two years on Legacy®, CM6700/CM6800/CM8500/CM9500/CM9700 Series Matrix, DF5 and DF8 Series Fixed Dome products.
- Two years on Spectra®, Esprit®, and PS20 Scanners, including when used in continuous motion applications.
- Two years on Esprit® and WW5700 series window wiper (excluding wiper blades).
- Eighteen months on DX Series digital video recorders and NVR300 network video recorders.
- One year (except video heads) on video cassette recorders (VCRs). Video heads will be covered for a period of six months.
- Six months on all pan and tilts, scanners or preset lenses used in continuous motion applications (that is, preset scan, tour and auto scan modes).

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to Pelco, Clovis, California. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental or consequential damages (including loss of use, loss of profit and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, Sales Order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product which does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

### RETURNS

In order to expedite parts returned to the factory for repair or credit, please call the factory at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair).

All merchandise returned for credit may be subject to a 20% restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid. Ship to the appropriate address below.

If you are located within the continental U.S., Alaska, Hawaii or Puerto Rico, send goods to:

Service Department  
Pelco  
3500 Pelco Way  
Clovis, CA 93612-5699

If you are located outside the continental U.S., Alaska, Hawaii or Puerto Rico and are instructed to return goods to the USA, you may do one of the following:

If the goods are to be sent by a COURIER SERVICE, send the goods to:

Pelco  
3500 Pelco Way  
Clovis, CA 93612-5699 USA

If the goods are to be sent by a FREIGHT FORWARDER, send the goods to:

Pelco c/o Expeditors  
473 Eccles Avenue  
South San Francisco, CA 94080 USA  
Phone: 650-737-1700  
Fax: 650-737-0933

## REVISION HISTORY

### Manual # Date Comments

C219M 6/97 Original version. (Manual created as a result of ECO # 9537.)  
C219M-A 6/04 Added a model in black, CM1750EXT-BK

Pelco, the Pelco logo, Camclosure, Genex, Legacy, Spectra, and Esprit are registered trademarks of Pelco.

World Headquarters • 3500 Pelco Way • Clovis, California 93612 USA • [www.pelco.com](http://www.pelco.com)  
USA & Canada • Tel: 800/289-9100 • Fax: 800/289-9150  
International • Tel: 1-559/292-1981 • Fax: 1-559/348-1120

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>