

# Voice Dialer

## Model: E-920A

Automatically dials up to four telephone numbers and delivers up to two different messages when triggered by an alarm system.

### FEATURES

- Easily connects to an alarm panel and automatically dials out when activated.
- Two independent voice messages. Stores up to four telephone numbers, cellular numbers or pager numbers.
- Delivers a message of up to 16 seconds to each number stored.
- Instant trigger or exit and entry delay settings.
- Repeats message two times to ensure full message is delivered.
- Waits 8 to 10 rings; calls back unanswered numbers up to 8 times.
- EEPROM retains memory if power is lost for up to one year.
- Optional 9-Volt internal battery provides stand-by power for approximately two to three days.
- Can be used worldwide due to Universal Dial Tone.
- Can be used with PBX and regular telephone systems.




### SPECIFICATIONS:

	<b>E-920A</b>
Power	12VDC
Current Draw	20mA (standby) 60mA (operate)
Trigger Inputs	2 N.C. Inputs
Temperature Range	-20°C to +50°C -4°F to +122°F
Number of Tel. #	Up to 4
Max. Digits per Tel. #	32
Case Material	ABS plastic
Weight	10.6 oz. (300gm)
Dimensions	5 <sup>3</sup> / <sub>4</sub> " x 4" x 1 <sup>1</sup> / <sub>2</sub> " 146 x 102 x 38mm

### CONTROLS:

- A. Siren jack (piezo siren output)
- B. Sensor input modular connector
- C. Telephone line modular connector
- D. DC adapter jack
- E. 9VDC battery compartment
- F. Speaker
- G. Microphone
- H. Dial keys
- I. Power switch
- J. LCD display
- K. MODE button
- L. MEMORY button
- M. VOICE memory button
- N. DIP Switches for programming

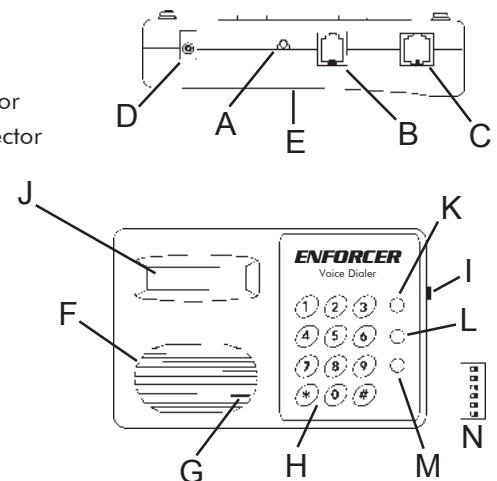

La póliza de SECO-LARM esta en continuo mejoramiento. Por esa razón, SECO-LARM se reserva el derecho de cambiar precios y especificaciones sin previo aviso. SECO-LARM no se hace responsable de errores de imprenta.

**SECO-LARM® U.S.A., Inc.**  
16842 Millikan Avenue, Irvine, CA 92606

Tel: 1-800-662-0800 (Domestic U.S. & Canada) Tel: 1-949-261-2999 (California & international)  
Fax: 1-949-261-7326 Email: info@seco-larm.com Website: www.seco-larm.com

E920A.pmd

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>