


Battery Installation and Replacement


Thomson/RCA DHG535

Battery Replacement Action

1. Remove the battery cover on the rear panel. There are two battery compartments. You may install a single battery into either compartment.

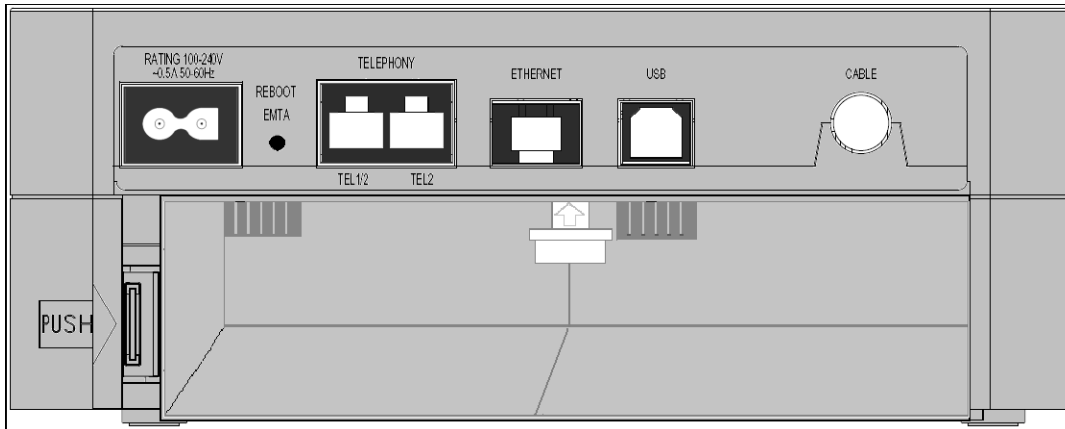

2. Insert the battery into one of the rear battery compartments, as shown below then replace the battery cover

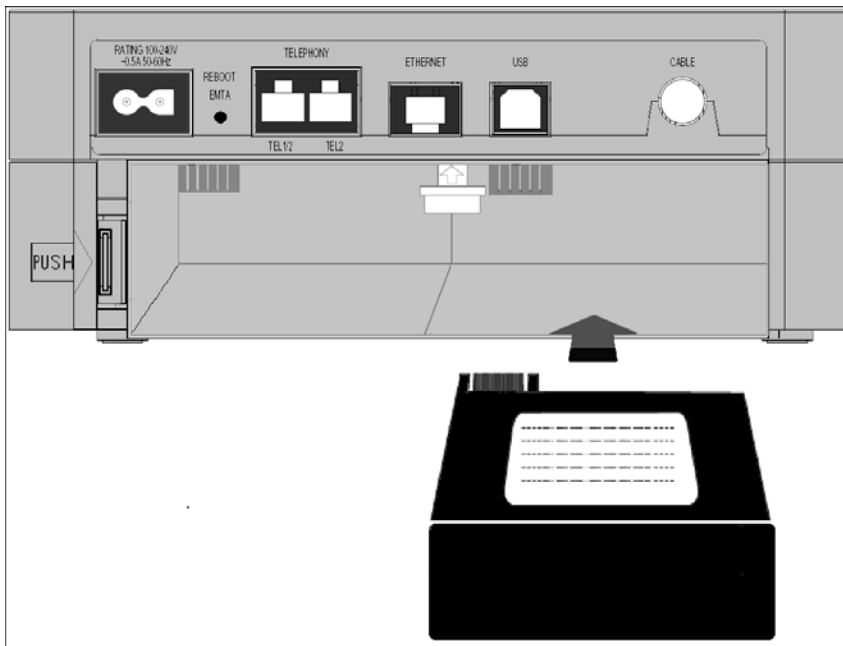

Unplug your CDV modem from the power outlet to install the battery. Once the battery installation is complete, plug your CDV modem back into the power outlet. Check for dialtone. The battery can take up to 24 hours to fully recharge, If you do not have dialtone, please call us at 800-948-5385

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>