


General Description

The half-cardioid e 901 is the perfect condenser microphone for kick drum. It is highly robust and step-resistant. It benefits from an integrated preamp.

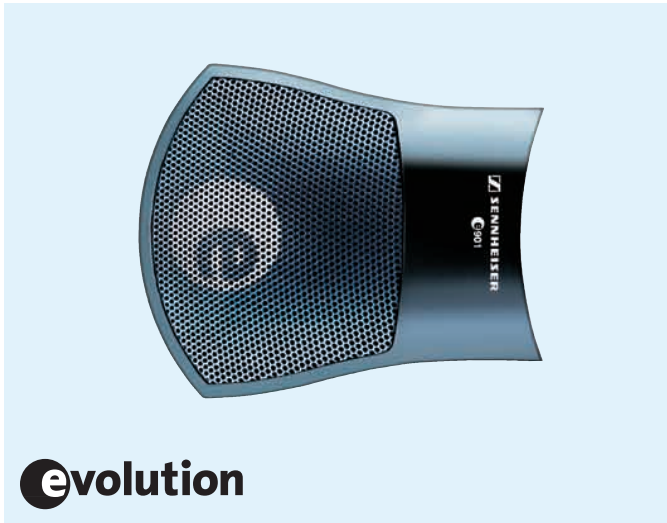



evolution

Technical Data

Transducer principle.....	pre-polarised condenser microphone
Pick-up pattern	half-cardioid
Frequency response	20 – 20,000 Hz
Sensitivity (free field, no load, 1 kHz).....	0.5 mV/Pa
Nominal impedance	< 100 Ω
Min. terminating impedance.....	1 kΩ
Dimensions	∅ 126.5 x 105 x 26.5 mm (∅ 4.98" x 4.13" x 1.04")
Weight	350 g (12.35 oz)

Features

- Frequency response optimized for kick drum
- Very fast attack
- Integrated preamp and gold-plated standard XLR plug, no need for special adapter cable
- No microphone stand needed for kick drum applications
- Handles very high sound pressure levels
- Slip-free, dampening rubber pad underneath
- Delivery includes: 1 e 901
Pouch
Instructions for use

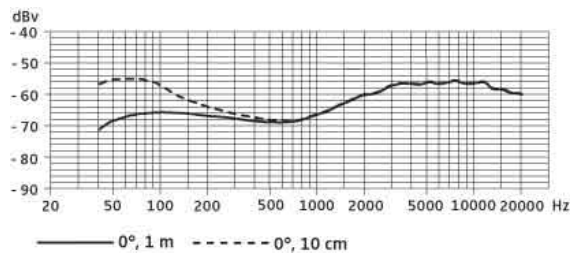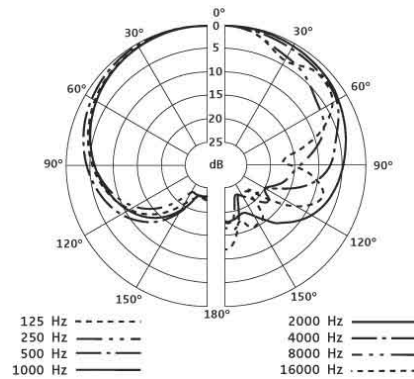

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>