


Parts List and Wiring Diagrams

Model PH-44 Headset

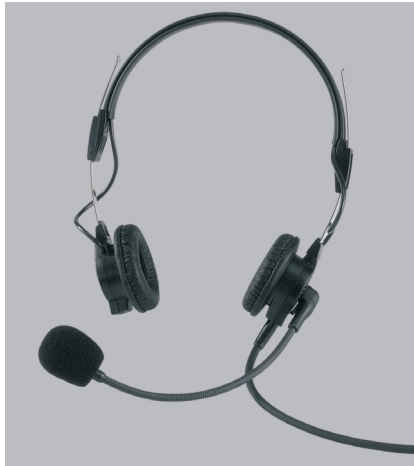

The PH-44 headset is a super lightweight, dual sided headset for the ultimate in day-long comfort. The PH-44 features a high quality dynamic earphones with a dynamic noise cancelling microphone on an adjustable boom that can be bent to practically any mouth-to-mic position. The unit has a straight cord and is available in various connector configurations.


Specifications

Receiver Type Dynamic
 Receiver Impedance 300 ohms
 Microphone Type Dynamic
 Microphone Impedance 200 ohms
 Weight 5.1 ozs
 Cord 6 ft. straight


Parts List

ITEM NO.	DESCRIPTION	QTY	PART NO.
1	Windscreen	1	59774-003
2	PT-Pan Head Screw, KA15 x 6(.236) LG., Black	4	590404-360
3	Glider Spring	2	64305-000
4	Housing Assy.	1	64308-106
5	Housing Assy.	1	64308-110
6	Glider Assy.	2	64310-000
7	Cord Amp Assy.	1	64311-054
8	Boom Mic / Housing Assy.	1	800499-001
9	Headband Assy.	1	64352-033
10	Housing, Rear	1	800504-000
11	Ear Cushion	2	590626-000
12	Connector, PH-44, XLR-4F	1	35320-004
	Connector, PH-44R, XLR-4M	1	35398-004
	Connector, PH-44R5, XLR-5M	1	35398-005
	Connector, PH-44A5, XLR-5F	1	35320-005

Exploded View

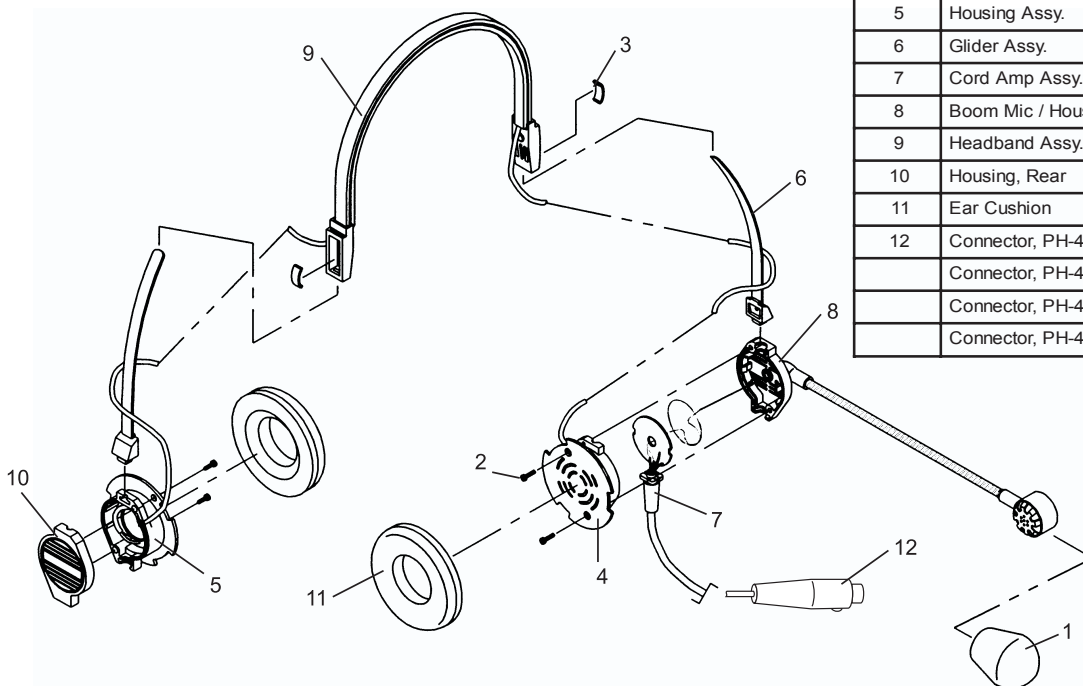


Wiring Diagram

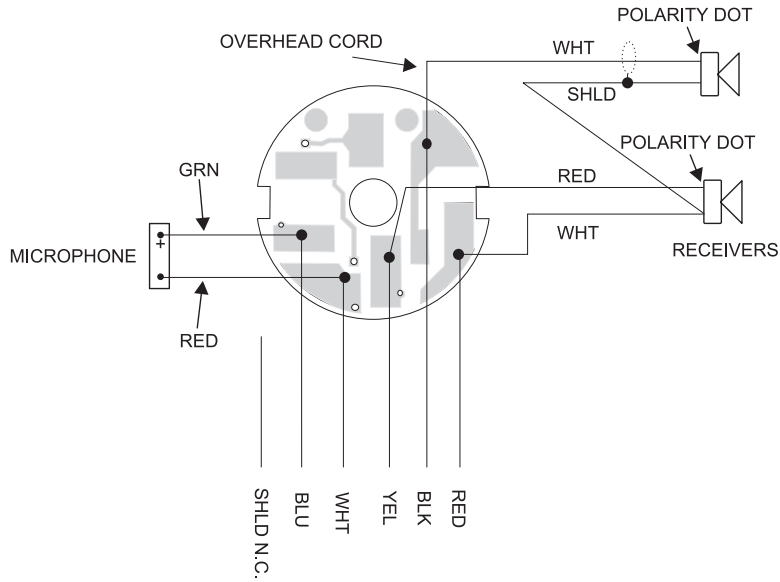


Connector Wiring

PH-44




4 Pin Female

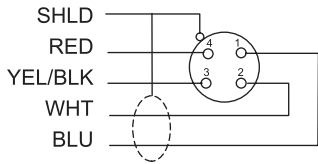


300853-100

PH-44R




4 Pin Male

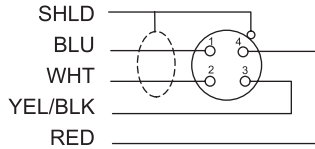


300853-101

PH-44A5




5 Pin Female

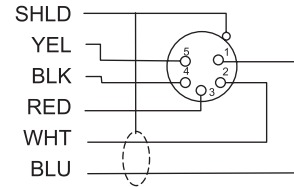


300853-200

PH-44R5



5 Pin Male

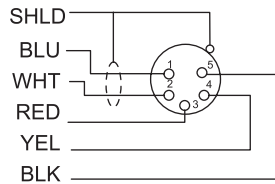

300853-201



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>