


1000 watts PMPO



Mini Hi-Fi System with 3VCD MP-3 CD Changer, 1000 Watts PMPO, Logic Deck

- 1000 watts PMPO
- 2 x 20 watts RMS
- PAL / NTSC
- Super Error Correction
- 9 Screens Preview
- Resume, A-B repeat
- Sound Navigation via Jog
- Digital Sound Control (optimal, jazz, rock, techno)
- 2-way Magnetically Shielded Speaker System
- MP3-CD Playback
- Plays CD, CD-R and CD-RW discs
- FM/MW Digital Tuning with 40 presets
- Dual Logic Tape Deck with Auto Replay
- Bedroom Clock with Wake-up Alarm and Sleep-timer
- 42-key Remote Control
- 4-Color Packaging

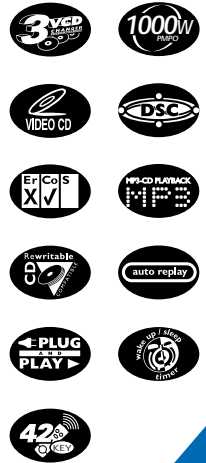

Let's make things better.



PHILIPS



Mini Hi-Fi System with 3VCD MP-3 CD Changer, 1000 Watts PMPO, Logic Deck

standard product information

amplifier

- 1000 watts PMPO
- 2 x 20 watts RMS, ±10% THD, 6 Ohm, 1 kHz
- Sound Navigation
- 4 Digital Sound Control
- Dynamic Bass Boost

compact disc player

- 3 CD Changer
- MP-3 CD Playback
- Plays CD, CD-R and CD-RW discs
- Digital servo technology
- Bit-check D/A converter
- 99-Tracks CD Random Program
- Play modes (repeat/program)
- Change 2 disc while playing 1

tuner

- FM/MW Digital Tuning with 40 presets
- Plug & Play for easy installation of radio stations

tape deck

- Dual Logic Tape Deck
- Auto Replay
- Normal speed dubbing
- CD synchro start recording
- Automatic recording level control
- Automatic tape type selection
- Electronic speed control and full auto stop

loudspeaker boxes

- 2-way Bass Reflex
- 5 1/4" Woofer
- 1" Polydome Piezo
- Magnetically Shielded (Front & Center Speakers)
- 6 Ohm

connections

- Stereo headphones : 3.5mm stereo jack
- CDR/DVD-AUX, TC-AUX in : cinch type socket
- Video out : cinch type socket
- Karaoke mic : 3.5 mm jack

general

- 3 Display modes include Dim mode
- Demo mode
- Clock/Timer
- 2 timer modes (wake-up/sleep)
- Karaoke Features
 - Digital Echo (VCD only)
 - Vocal Fader (VCD only)
 - Tone Control (VCD only)
- 42-key Remote Control

	/21	/21M	/22	/29	/30	/33	/34
Asia Pacific		•					
Australia/NZ							
Middle East/S Africa							
Latam							
Europe							
E Europe							
Mexico							
tuner							
FM87.5-108MHz			•				
MW522-1602kHz			•				
LW153-279kHz							
FM75 Ohm coaxial			•				
mains supply							
120/230V 50-60Hz			•				
230V/50Hz							
general							
made in sticker							

EAN: 87 10895 70099 3 (/21M)

Product Dimensions:
 265 mm W x 310 mm H x 320 mm D (center unit)
 210 mm W x 310 mm H x 235 mm D (speakers)
 Package Dimensions:
 620 mm W x 410 mm H x 474 mm D
 Product weight: 15 kg
 Carton contains: CD Changer Mini System, Multi-Function Remote Control, Operating instructions, Warranty Information

Printed in Singapore
 Date Printed : Sep 2000
 Specifications subject to change without notice.
 © 2000 Royal Philips Electronics N.V.
 All rights reserved.

<http://www.philips.com>

Let's make things better.



PHILIPS

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>