


## **English**

# Operation and Maintenance Manual for 1/2" Crown Sheathing Stapler Model SM506D




Record in the space below the Model Number and Serial Number of Stapler.	
Model No.	
Serial No.	
RETAIN THESE NUMBERS FOR FUTURE REFERENCE!	

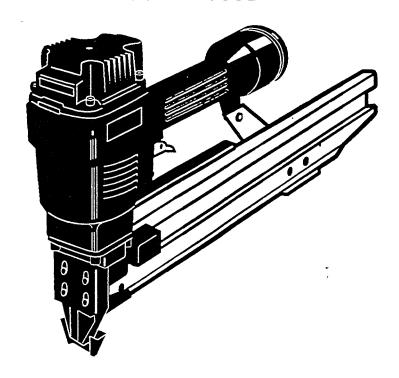

Should you have any questions regarding the operation or repair of this stapler, please call our Stapler Hotline at 1-800-543-6400. If you are calling from Ohio or outside the continental United States, please call collect, 1-513-367-1182

# CAREFULLY READ (AND SAVE) THESE INSTRUCTIONS BEFORE OPERATING STAPLER

IN186001AV 11/93

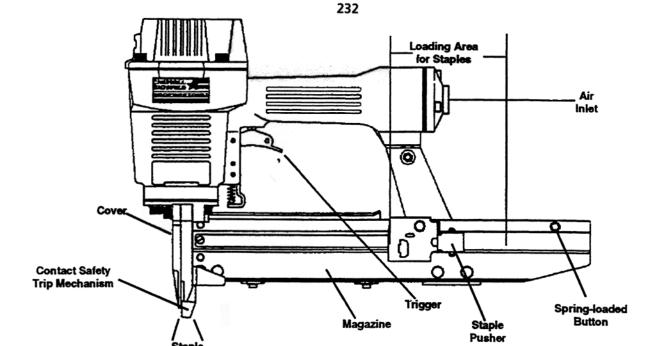

#### Stapler Specifications

- REQUIRES: 3.2 SCFM with 16 staples per minute @ 90 PSI
- AIR INLET: 1/4" NPT
- STAPLE SIZE RANGE: 5/8" to 2"
- MAGAZINE CAPACITY: 150 staples per load
- WIRE SIZE: 16-gauge
- WEIGHT: 6 lb-7 oz.
- LENGTH: 15"
   HEIGHT: 10.5"
- MAXIMUM PRESSURE: 110 PSI
- PRESSURE RANGE: 70 110 PSI

**DANGER:** Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

WARNING: Indicates an potentially hazardous situation which, if not avoided, will result in death or serious injury.

CAUTION: Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury. This symbol may also alert the user to unsafe practices.

NOTE: Alerts the operator to useful information.


Discharge Area

The **operator** of this Stapler **must** take the necessary precautions to prevent the level of danger indicated by these symbols. The operator is also required to read and understand this instruction manual and all safety warnings, labels, etc.

Any **employer** allowing the use of this Stapler in their field of work **must** distribute this instruction manual to all users. The employer must also ensure all users read, understand and follow the instructions as described in the manual, safety warnings, labels, etc.

Campbell Hausfeld Nailers and Staplers meet or exceed Industries' Standards as set forth by the American National Standard/International Staple, Nail and Tool Association in ANSI/ISANTA SNT-101-1983 and SNT-101a-1987.

# Sheathing Stapler Model SM506D - Exploded View

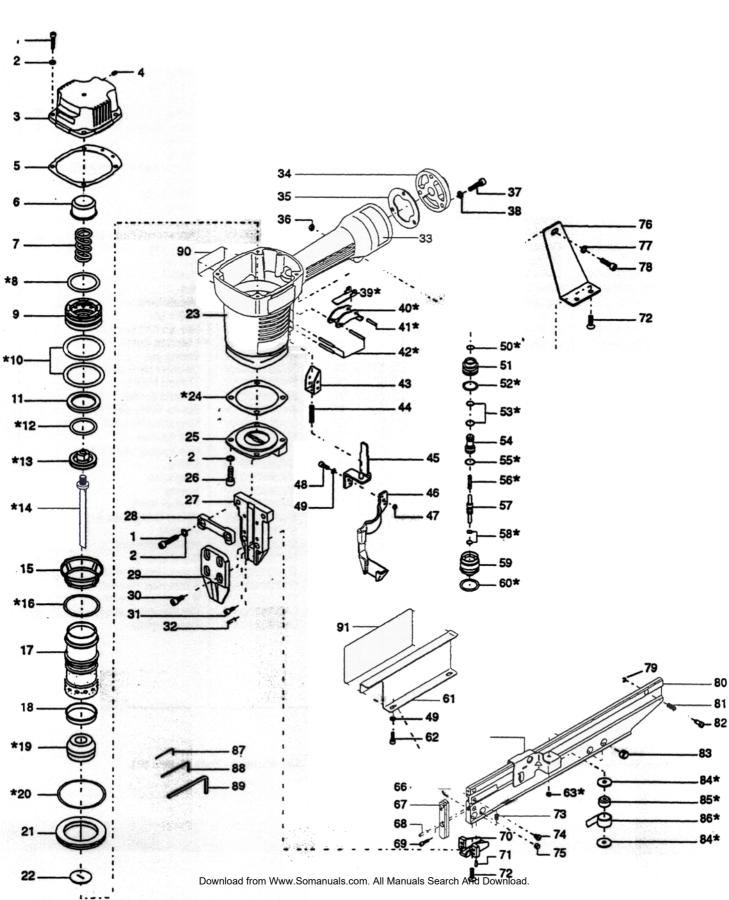

# 1/2" Crown Sheathing Stapler Model SM506D - Parts List

Key No.	Part No.	Description	Qty.		Key No.	Part No.	- Popovintin-	- 0
	0)/000 400 4)/	<del> </del>		- H		-	Description	Qty.
1	SV290400AV	Hex Socket Cap Screw	6	] ]	49	SV295100AV	Flat washer	3
2	SV290500AV	Spring Washer	10	1 1	50	*	O-ring	1
3	SV290600AV	Cap	1	, ;	51	SV295300AV	Valve cap	1
4	SV290700AV	Hex socket head set screw	1		52		O-ring	1
5	SV290800AV	Cylinder cap seal	1		53	*	O-ring	2
6	SV290900AV	Seal	1	1	54	SV295600AV	Valve plunger A	1
7	SV291000AV	Spring	1	1 1	55		O-ring	1
8 9	SV291200AV	O-ring	1	1 1	56		Spring	1
10	34291200M4	Hd. valve piston O-ring	1	1 1	57	SV295900AV	Trigger valve Plunger B	1
11	SV291400AV	Collar	2	1 1	58	0)/0004004)/	O-ring	2
12	*	O-ring	1	1 1	59	SV296100AV	Valve body	1
13	*	Driver blade piston	•	1 1	60 61	CV/00C000AV/	O-ring	1
14	•	Driver blade pistori  Driver blade	1	1 1	62	SV296300AV	Guide bracket	1
15	SV291800AV	Collar	1	1 1	63	SV296400AV	Hex socket head screw	2
16	*	O-ring	1	! !	64	SV296500AV	Shaft ring	2
17	SV292000AV	Cylinder	1		65	SV296600AV SV296700AV	Roll pin	1
18	SV292100AV	Check seal	1		66		Pusher	1
19	*	Bumper	1		67	SV296800AV SV296900AV	Nut	1
20	*	O-ring	1		68	SV297000AV	Middle strip	1
21	SV292400AV	Cylinder spacer	1	!	69	SV297000AV SV297100AV	Roller pin	2
22	SV292500AV	Driver blade guide	1		70	SV297100AV SV297200AV	Hex socket head screw	2
23	SV292600AV	Body	1	. ]	71	SV297200AV SV297300AV	<ul> <li>Locating guide</li> <li>Spring pin</li> </ul>	1
24	*	Gasket	1	1	72	SV297400AV	Counter sunk screw	2
25	SV292800AV	Guide mount plate	i	- 1	73	SV297500AV	Thread insert	4 2
26	SV292900AV	Hex socket head cap screw	4	- 1	74	SV297600AV	Special screw	1
27	SV293000AV	Driver guide plate	1	1	75	SV297700AV	Screw fixing seat B	2
28	SV293100AV	Driver guide cover B	i		76	SV297800AV	Magazine bracket	1
29	SV293200AV	Drive guide cover A	1	1	77	SV297900AV	Flat washer	1
30	SV293300AV	Hex socket head screw	4		78	SV298000AV	Hex socket head screw	1
31	SV293400AV	Hex socket head screw	2		79	SV298100AV	E-ring	1
32	SV293500AV	Spring pin	2		80	SV298200AV	Magazine	1 1
33	DK318600AV	Oil daily warning decal	1		81	SV298300AV	Spring	i
34	SV293600AV	End cap	1		82	SV298400AV	Pusher latch	i
35	SV293700AV	Gasket	1		83	SV298500AV	Screw fixing seat A	1
36	SV293800AV	Locknut	1		84	SV298600AV	Washer	2
37	SV293900AV	Hex socket head screw	3		85	SV298700AV	Rolling element	1
38	SV294000AV	Spring washer	3	! !	86	SV298800AV	Band spring	1
39	SV294100AV	Trigger lever	1		87	SV109300AV	3 mm Hex Wrench	1
40	SV294200AV	Trigger	1	!	88	SV109400AV	4 mm Hex Wrench	1
41	SV294300AV	Spring pin (trigger)	1		89	SV109500AV	5 mm Hex Wrench '	1
42	SV294400AV	Spring pin	3		90	DK376300AV	CH Pro decal w/color bar	2
43	SV294500AV	Safety guide	1		91	DK376400AV	Danger plate	1
44	SV294600AV	Spring	1		- 1			
45	SV294700AV	Safety unit B	1		i		[	
46	SV294800AV	Safety unit A	1		ļ		j	
47	SV294900AV SV295000AV	Locknut	1		1			
48	34582000VA	Hex socket head screw	1			*		
* Availab	Available as kits or assemblies only. See page 21.							

a An

Note: All screws, nuts, bolts, etc. are melicial from Www.Somanuals.com. All Manuals Search And Download.

O-Rings, Springs, Bumpers and Driver are considered normal wear items - (See Warranty - Page 24, item 6E).

# 1/2" Crown Sheathing Stapler Model SM506D Parts Kits & Assemblies

#### Parts Kits

Includes

Key Nos.	Description	Part No.	Qty.
- 8 10 12 16 18 20	Piston/Cylinder O-Ring Kit     O-ring     O-ring     O-ring     O-ring     O-ring     Check seal     O-ring	SV290000AV	1 2 1 1 1
50 52 53 55 56 58 60	* Trigger O-Ring Kit O-ring O-ring O-ring O-ring Spring O-ring O-ring O-ring O-ring	SV290100AV	1 1 2 1 1 2 1
- 12 13 14	Driver Kit O-ring Driver blade piston Driver blade	NP506D99AV	1 1 1
- 19 24	Bumper Kit Bumper Gasket	NP506D97AV	- 1 1

#### **Assemblies**

Includes Key Nos.	Description	Part No.	Qty
39 40 41 42	Trigger Assembly Trigger lever Trigger Spring Pin Spring Pin	SV290200AV	1 1 1 3
63 64 65 84 85 86	Pusher Set Assembly Shaft ring Roll pin Pusher Washer Rolling element Band spring	SV290300AV	2 1 1 2 1

<sup>\*</sup> Complete O-Ring Kit NP506D98AV Consists of Piston/Cylinder O-Ring Kit SV290000AV Prigger O-Ring Kit SV290100AV

#### **Fasteners**

The following Campbell Hausfeld framing staples are available at local retail stores. If you need help locating any item, call customer service at 1-800-543-6400. Campbell Hausfeld staples meet or exceed Federal Specifications FF-N-105B.

Galvanized/ Coated Galvanized/ Coated		Adhesive Adhesive	50 50	2500 2500
	-	Adhesive	50	2500
Galvanized/ Coated	•	Adhesive	50	2500
Galvanized/ Coated	-	Adhesive	50	2500
-	Coated  Galvanized/ Coated	Coated  Galvanized/ Coated	Coated Adhesive Galvanized/ Coated - Adhesive	Coated Adhesive 50  Galvanized/ - Adhesive 50

Interchange Information

### Staples used in the Campbell Hausfeld SM506D Sheathing Stapler will also work in: Bostitch: T36-1

COLORMATCH <sup>™</sup> system

COLORMATCH™ stripe on Campbell Hausfeld staple boxes. Simply match the two color stripes to choose the right staples for

T36-50

T40S4-CT

T50S4-1 T55S4-1 Paslode: 3150-S16

3200-S16P

# Your Campbell Hausfeld 1/2" Crown Sheathing Stapler has a unique purple COLORMATCH™ stripe. Look for the same purple


Repairs on the stapler must be performed by qualified and experienced service people ONLY.

parts, specify by part number.

#### Replacement Parts

Stapler Repair

your stapler.



old numbers. However, the specifications and prices of the staples remain the same for both model numbers.

#### Assembly Procedure for Seals

When repairing a stapler, the internal parts must be cleaned and lubricated. Parker O-lube or equivalent must be used on all O-rings. Each O-ring must be coated with O-lube before assembling. A small amount of oil must be used on all moving surfaces and pivots. After reassembling, a few drops of Unocal RX22 oil or equivalent, must be added through the air line before testing.

# Troubleshooting Guide

<b>▲</b> WARNING	Stop using the stapler immediately occur.	if any of th	1
WARNING			_

ne following problems occur. Serious personal injury could

Any repairs or replacements must be done by a Qualified Service Person or an Authorized Service Center ONLY.

PROBLEM	CAUSE	SOLUTION
Air leaking at trigger valve area.	O-Rings in trigger valve housing are damaged	O-Rings must be replaced & operation of contact safety trip mechanism must be checked
Air leaking between housing and nose.	Loose screws in housing.	Screws need to be tightened.
	Damaged O-Rings	O-Rings must be replaced

Damage to bumper.

Air leaking between housing and cap. Loose screws.

Stapler skips driving staple.

Air leaking at trigger valve stem

Damaged gasket.

Wom bumper.

Dirt in nose piece

Dirt or damage prevent staples or pusher from moving freely in magazine. Damaged pusher spring.

Inadequate air flow to stapler. Wom O-Ring on piston or lack of lubrication.

Damaged O-Ring on trigger valve. Air leaks Cap gasket leaking Stapler not lubricated sufficiently. Broken spring in cylinder cap.

Exhaust port in cap is blocked. Guide on driver is worn

Driver is damaged.

Staples are not correct size. Staples are bent.

Staples are jammed in stapler.

Stapler runs slow or has loss of power

Magazine or nose screws are loose

Down oa Officing's www.soatisaarrealstarroaged Manuals Search A

Guide needs to be replaced Replace with undamaged staples.

Screws need to be tightened

Driver needs to be replaced

OPRIMITISM seals need to be replaced.

Bumper needs to be replaced.

Screws need to be tightened.

Gasket needs to be replaced.

Bumper needs to be replaced.

Magazine needs to be cleaned

Spring needs to be replaced

O-Rings need to be replaced.

Gasket needs to be replaced.

Drive channel needs to be cleaned

Fitting, hose or compressor needs to be checked

O-Rings need to be replaced. Lubricate.

Screws and fittings need to be tightened

Damaged internal parts need to be replaced. Staples recommended for stapler must be used

Spring needs to be replaced

Stapler needs to be lubricated.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com