

GETTING STARTED


SYSTEM REQUIREMENTS:

- Home ethernet network
- Broadband Internet access for product updates and product registration.
- One of the following FireBall Servers installed on the same ethernet network:
 - FireBall FP-1 (with iPod docked)
 - FireBall AVX or MX
 - FireBall E or E2
 - FireBall DVDM-300 or DVDM-552
 - FireBall SE-80
- TV or A/V receiver with video display

2 Connect the FireBall ZP-1 to your TV or A/V Receiver

- Locate the included three wire composite video (yellow) and analog audio (white and red) cable.
- Connect the LEFT and RIGHT audio connectors (white and red) to the **ANALOG AUDIO OUT** jacks on the back of the ZP-1. Connect the video connector (yellow) to the **Composite VIDEO OUT** jack on the back of the ZP-1.
- Connect the other end of the cable to an available set of **ANALOG AUDIO IN** and **COMPOSITE VIDEO IN** jacks on the back of your TV or A/V Receiver.

Note: You may use optional s-video or component video cables and optical digital audio cables for the best picture and sound quality. Contact your Escent dealer for more information.

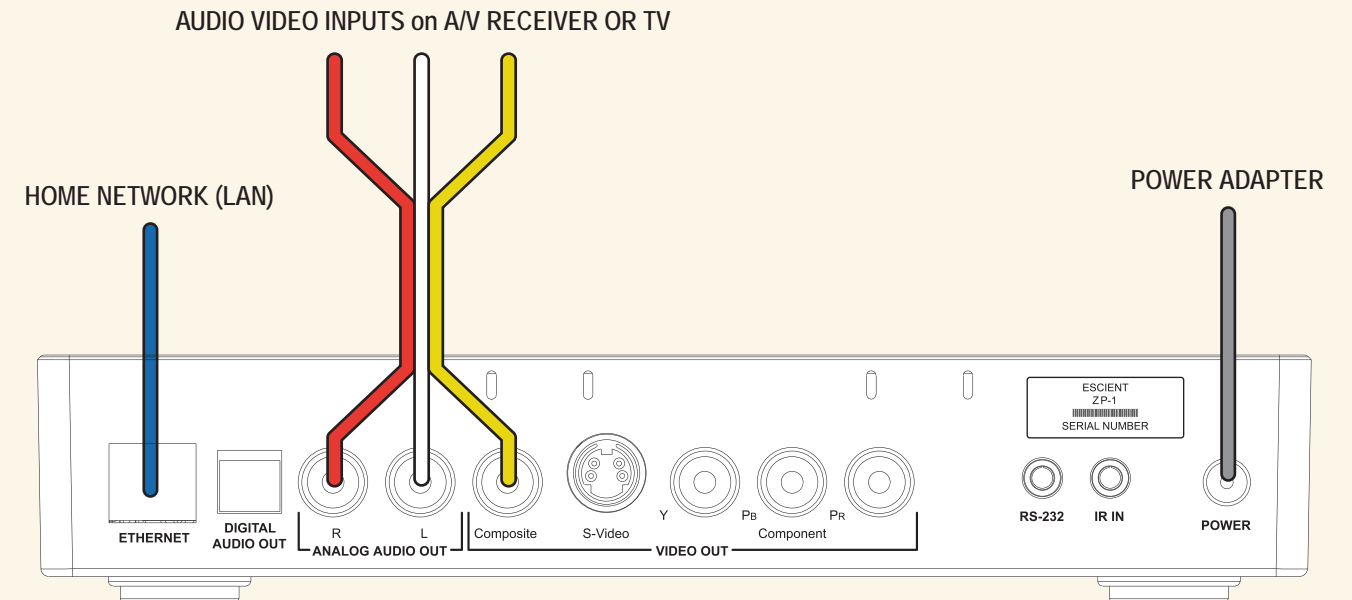

3 Connect the FireBall ZP-1 to Your Home Network

Note: The ZP-1 requires a home network and Internet connection to browse and play music from a FireBall server, to play Internet radio stations, and for general system maintenance.

- Connect the included ethernet cable from FireBall's ethernet jack to an open port on your Ethernet router.

Note: If you want to connect your FireBall ZP-1 to a wireless network you will need to purchase an optional Ethernet to Wireless Bridge. Please contact your Escent dealer for more information.

4 Power Up the ZP-1

- Connect the included Power Adapter to the ZP-1.
- Connect the Power Adapter to an AC outlet.

Action: The Standby LED on the front of the FireBall will begin to flash RED during the power on cycle. When the LED turns solid RED, the FireBall is ready for use. Press the power button on the front panel or on the remote control. The LED will turn solid GREEN and video will be displayed on the TV when the unit is on.

Note: You may have to press the "FB1" button on the remote to configure it to control FireBall. Also be sure the TV or A/V receiver are turned on and set to the correct input.

5 QuickStart and Product Registration

- Use the remote control and follow the on-screen instructions.

MORE SETUP ▶


1 Unpack Your New FireBall ZP-1

- FireBall ZP-1
- Handheld Remote
- Two AAA batteries
- Ethernet Cable
- 3 Wire Audio/Video Cable
- Power Adapter
- Escent Software and User's Manual CD-Rom
- This Quick Setup Guide

- Install the two AAA batteries into the remote


- Make note of the serial number (located on the back)

SERIAL NUMBER: _____

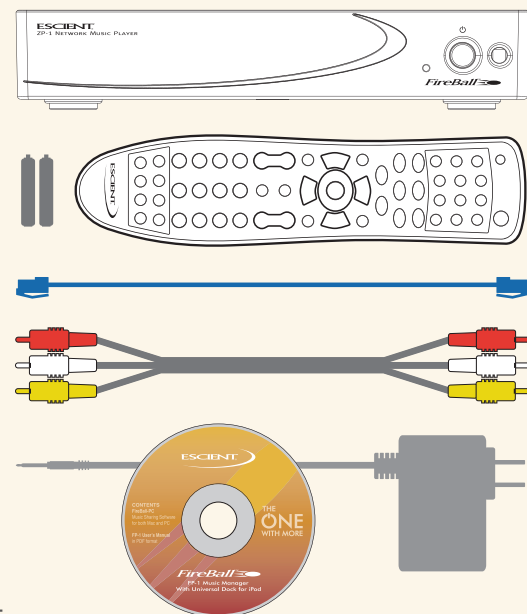

6 Select a FireBall Server to Connect to

- Press the SETUP key on the remote to display the Setup menu
- Select the NETWORK menu
- Select the REMOTE SERVER CONNECTION menu
- Select the name of the FireBall server you want to connect to
- Select the SAVE button to save your selection

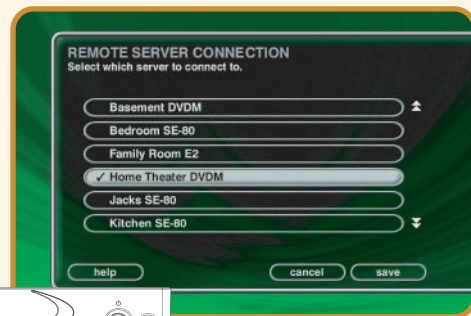

The Music Guide will appear and display the music content from your FireBall server's internal hard drive. You can now access all of the music from your FireBall server remotely using the FireBall ZP-1.

7 Listen to Music

- Press the MUSIC key on the remote
- Highlight the Music Title you want to listen to
- Press PLAY
- Enjoy!



8 Listen to Internet Radio


- Press the RADIO key on the remote
- Highlight the radio station you want to listen to
- Press PLAY
- FireBall will connect and begin to stream (play) the station




Music Guide: Browse and manage your Music collection




Radio Guide: browse and manage Internet Radio stations

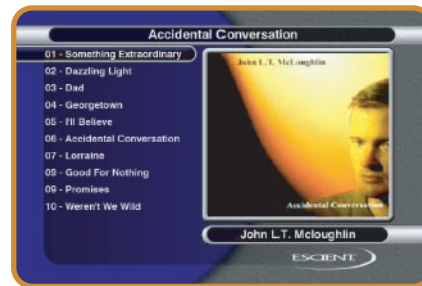


Music Player: display and control the currently playing music title

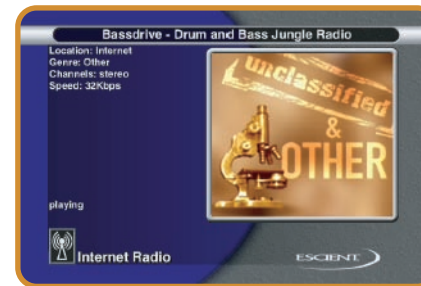

Radio Player: displays the currently playing iRadio station, location, channels and speed (if available)

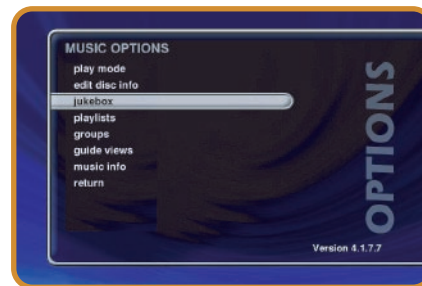

Music Options: allows you to create playlists and groups, edit disc information and access other music features

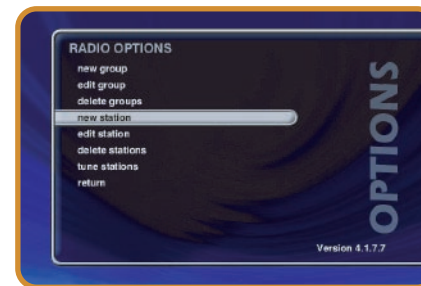

Radio Options: allows you to create custom groups, tune new stations and access other iRadio features

OPTIONAL FIREBALL-PC SOFTWARE

The included CD contains a FREE copy of the Escent FireBall-PC software for your Mac or PC. FireBall-PC allows the ZP-1 to play music stored on your computer. Insert the CD into your computer for installation instructions.



- CODE SET**
Code Set - used to set the universal IR source buttons
- UNIVERSAL SOURCE SELECT**
TV / Cable / Receiver / DVD - used to configure the remote to control other devices
- ZP-1 SOURCE MODES**
Used to select the media source
- TRANSPORT CONTROLS**
Rewind / Play / Forward / Record / Stop / Pause - used to control playback of music. Also used for text entry and for canceling certain operations
- GUIDE**
Guide / Player - toggles between Guide and Player screens
- NAVIGATION & SELECT**
Up / Down / Left / Right / Select - used to navigate and select on-screen menus and buttons
- INFO**
Info - displays additional music info.
- VOLUME CONTROL**
Volume Up / Volume Down / Mute - Universal remote can be configured to operate volume on TVs and receivers
- DISC PLAY FUNCTIONS**
Previous / Next - skip disc functions
- SETUP**
Setup - displays Setup menu
- MUSIC PLAY FUNCTIONS**
Repeat / Random - used to cause the system to play the current group/genre in repeat or random playback mode
- POWER**
Power - used to toggle the current source device on and off
- FIREBALL SELECT**
FireBall1 / FireBall2 / FireBall3 / FireBall4 - use FB1 to control the ZP-1. Use other FB buttons if additional FireBall products are installed
- ALL / NONE**
Toggle All or None on Select Guides
- VIEW / MENU**
View / Menu - toggles through various guide views (artist, title, cover)
- CHANNEL / PAGE CONTROL**
Channel/Page Up/Down - used to page up and down in Guide and Player screens
- OPTS**
Options - displays Options menu
- KEY PAD**
Alpha / Numeric / Enter - used for entering numbers and text. Also used for searching in the music and radio guides
- CONTROL**
Mode - changes music play modes: normal, random, repeat etc
Previous / Next - skip disc functions
Macro Function - used to directly access various music and radio items and control
- MUSIC JUKEBOX**
Add-Jukebox / Play-Jukebox - used to add the currently highlighted music track to the Jukebox playlist and to play the Jukebox playlist



©2006 Escent. All rights reserved. Escent and the Escent logo are registered trademarks and FireBall and Physital are trademarks of Escent and D&M Holdings. All other trademarks are property of their respective owners. FireBall is compliant with legal guidelines for music recording. CD media that can be used for recording is either CD-Ra or CD-RWa. CD-R and CD-RWs cannot be used. Broadband is recommended for connection. ISP may be used. Please note: some free ISPs don't use standard, consistent methods of Internet connectivity and don't open networks to outside users. Call for recommendations. Escent reserves the right to change product hardware, features and software without notice. Upon any change, materials are updated as quickly as possible, but may not be reflected in documents already distributed. Supported hardware is updated continually. If you wish to interface with hardware that is not listed on this data sheet, please call Escent at 800.372.4368.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>