

FE83E

Features

- 'ES cone' paper made of banana plant's fiber
- Newly designed center cap
- Ferrite magnet




Specifications

&

Thiele/Small Parameters


Size	:	80 mm / 3 in
Voice Coil Diameter	:	16 mm / 0.6 in
Cast / Stamped	:	Cast
Impedance	:	8 Ω
Reproduction Frequency Response	:	fs - 30 kHz
Sound Pressure Level	:	88 dB/W(m)
Rated Input	:	5 W
Music Power	:	10 W
Magnet Material	:	Ferrite
Magnet Weight	:	
(main)	:	140 g / 0.309 lb
(cancel)	:	g / lb
Net Weight	:	360 g / 0.794 lb

Frequency Response / Impedance

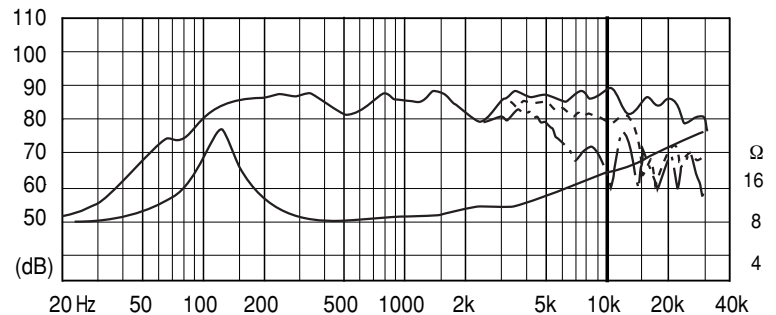

a	:	30 mm
D	:	60 mm
Sd	:	0.00283 m ²
Zn	:	8 Ω
Fs	:	127 Hz
Re	:	7.87 Ω
Le	:	n/a mH
Qms	:	4.00
Qes	:	0.98
Qts	:	0.79
Mms	:	1.39 g
BL	:	2.98 Telsa/m
Vas	:	1.29 L
Xmax	:	0.40 mm
Eff/η0	:	0.26 %
Cms	:	0.00115 mm/N
EBP	:	130

Dimensions & Mounting Information

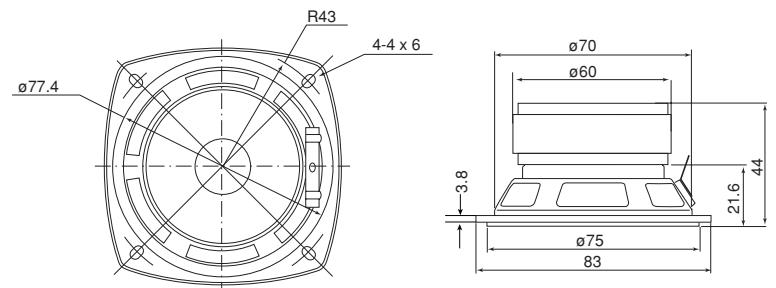

Overall Diameter	:	83 mm / 3.3 in
Baffle Hole Diameter	:	70 mm / 2.8 in
Depth	:	44 mm / 1.7 in

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>