



Education Software Installer 2011

Mac OS X operating system software

System administrator's guide

Extraordinary made simple™ | **SMART**™

Trademark notice

SMART Notebook, SMART Response, SMART Sync, Senteo, SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Mac, Mac OS, Apple Remote Desktop and Finder are trademarks of Apple Inc., registered in the U.S. and other countries. Adobe and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners.

Copyright notice

© 2011 SMART Technologies ULC. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form by any means without the prior written consent of SMART Technologies ULC. Information in this manual is subject to change without notice and does not represent a commitment on the part of SMART.

One or more of the following patents: US6320597; US6326954; US6741267; US7151533; US7757001; USD612396; USD616462; USD617332; and USD636784. Other patents pending.

07/2011

Installation overview

<input type="checkbox"/>	Task	Reference
<input type="checkbox"/>	Ensure your computers meet the minimum requirements.	page 2
<input type="checkbox"/>	Obtain the installation packages.	page 2
<input type="checkbox"/>	Customize the installation packages using SMART Install Manager.	page 3
<input type="checkbox"/>	Deploy the installation packages.	page 11
<input type="checkbox"/>	If the software didn't activate during installation, activate it.	page 12

LINKS

Please send any feedback on this guide to DocumentationFeedback@smarttech.com.

Contents

Installation overview	i
Chapter 1: Getting started	1
Computer requirements	2
Installation packages	2
Chapter 2: Customizing installation packages	3
Installing SMART Install Manager	3
Using SMART Install Manager	4
Customizing the installation package	6
Removing SMART Install Manager	9
Chapter 3: Deploying the software	11
Deploying the software	11
Activating the software after installation	12
Chapter 4: Updating the software	15
Chapter 5: Removing the software	17
Appendix A: Installing and maintaining Gallery content	21
Installing Gallery content	22
Modifying Gallery content	27
Changing Gallery content locations	27
Removing Gallery content	31
Index	33

Chapter 1

Getting started

Computer requirements.....	2
Installation packages.....	2

This guide explains how to customize and deploy the following software:

- SMART Notebook™ collaborative learning software 10.8
- SMART Product Drivers 10.8
- SMART Response™ 2011 assessment software
- SMART Sync™ 2011 Teacher software
- SMART Common Files

NOTES

- For information on customizing and deploying previous versions of this software, see the appropriate system administrator's guides at smarttech.com/support.
- For information on installing SMART Sync Student software, see the *SMART Sync 2011 system administrator's guide* (smarttech.com/kb/160492).

This guide is intended for IT administrators and others experienced with customizing, deploying and administering software on Mac computers in a networked environment. To use this guide, you must:

- Know how to complete basic administrative tasks in Mac OS X operating system software such as working in Terminal
- Have administrative privileges and access to servers
- Have access to the DVD or have Internet access

Computer requirements

Before you install the software, ensure your teachers' computers meet the minimum requirements:

- 1.5 GHz Intel® processor or better
- 1 GB of RAM
- Free hard disk space:

Software	Space required
SMART Notebook software	163 MB
Gallery Essentials	499 MB
Lesson Activity Toolkit	70 MB
SMART Product Drivers	203 MB
SMART Response assessment software	65 MB
SMART Sync Teacher software	25 MB
SMART Common Files	257 MB
Total	1282 MB

- Mac OS X 10.5.8 operating system software or later
- Adobe® Flash® Player 10 for SMART Notebook software

Installation packages

There is one installation package (also known as an MPKG file) for the Education Software Installer:

Installation package	File name
Education Software Installer	Education Software Installer 2011.mpkg

This installation package is located on the DVD in **[DVD]/Administrators/Mac/Education Software Install**.

Alternatively, you can download the packages from smarttech.com/administratordownloads.

Chapter 2

Customizing installation packages

Installing SMART Install Manager.....	3
Using SMART Install Manager.....	4
Opening an installation package.....	4
Saving your changes.....	5
Publishing your changes as an MPKG file.....	5
Customizing the installation package.....	6
Removing SMART Install Manager.....	9

SMART Install Manager enables you to customize SMART software installation packages (DMG or MPKG files). Publish your customizations as MPKG files and then deploy the MPKG files to computers in Silent mode.

i NOTE

You can deploy modifications in MPKG files only in Silent mode.

Installing SMART Install Manager

Install SMART Install Manager from the DVD.

OR

Download and install SMART Install Manager from the SMART Support website.

■ To install SMART Install Manager from the DVD

1. Insert the DVD in your computer's DVD drive.
A dialog box appears.

CHAPTER 2

Customizing installation packages

2. Click **Administrator Preparation and Tools**, and then click **Install SMART Install Manager**.

The SMART Install Manager installation wizard appears.

3. Follow the on-screen instructions.

■ To install SMART Install Manager from the website

1. Go to smarttech.com/administratordownloads.
2. Scroll to *SMART Notebook collaborative learning software*, click **Choose a version**, and then select **SMART Notebook 10.8 software for Mac**.
3. Click **Administrator Downloads**, and then click **SMART Install Manager**.
4. Save the **SMART Install Manager.dmg** file to your computer.
5. Double-click the **SMART Install Manager.dmg** file to mount the disk image.
6. Double-click the **SMART Install Manager.mpkg** file.

The SMART Install Manager installation wizard appears.

7. Follow the on-screen instructions.

Using SMART Install Manager


After you install SMART Install Manager, you can start it by opening the Finder, browsing to **/Applications/SMART Technologies**, and then double-clicking **Install Manager**.

With SMART Install Manager, you can do the following:

- Open and customize an installation package.
- Save your changes to the installation package as an XML file.
- Publish your changes to the installation package as a new MPKG file.

Opening an installation package

To customize an installation package, drag its DMG or MPKG file into the SMART Install Manager window.

Alternatively, you can browse for installation packages on your computer by clicking .


CHAPTER 2

Customizing installation packages

i NOTE

All installation packages you've previously opened in SMART Install Manager appear in the *Unmodified Packages* tab.

After you open an installation package, a set of pages for that installation package appears in SMART Install Manager. Customize the installation package using the controls on these pages.

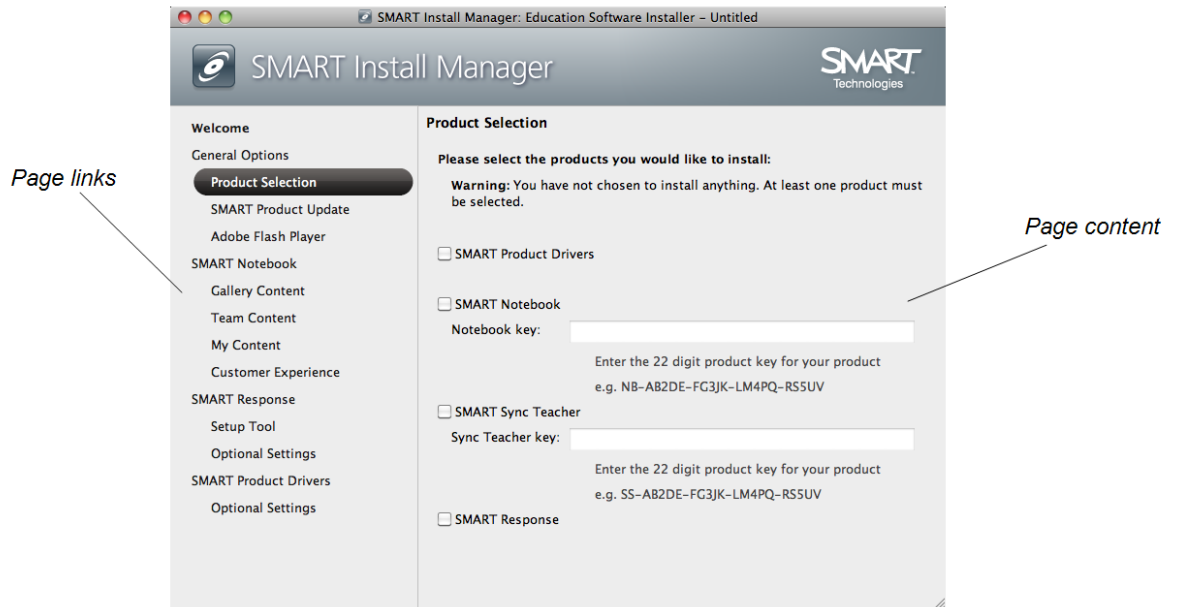

Saving your changes

After you customize an installation package, save your changes as an XML file by selecting **File > Save As**. When you next start SMART Install Manager, load the XML file by selecting **File > Open**, or by opening the MPKG file and then selecting **File > Import**.

i NOTE

All XML files you create or open in SMART Install Manager appear in the *Modified Packages* tab of the *Welcome* page.

Publishing your changes as an MPKG file

The final step in using SMART Install Manager to customize an installation package is to publish your changes as an MPKG file. To do this, select **File > Publish**, and then use the dialog box to define a location for and create the MPKG file.

Customizing the installation package

To customize the installation package, open the **Education Software Installer 2011.mpkg** file in SMART Install Manager (see *Opening an installation package* on page 4), and then set the controls on each page.

Control	Procedure	Notes
General Options: Product Selection		
SMART Product Drivers	Select to install SMART Product Drivers.	
SMART Notebook software	Select to install SMART Notebook software.	
Product key	Type your 22-character product key for SMART Notebook software.	You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.
SMART Sync Teacher software	Select to install SMART Sync Teacher software.	
Product key	Type your 22-character product key for SMART Sync Teacher software.	You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.
SMART Response software	Select to install SMART Response software.	If you choose to install SMART Response software, you must also install and activate SMART Notebook software. When you select this check box, SMART Install Manager automatically selects the SMART Notebook check box.
Product key	Type your 22-character product key for SMART Response software only if you have SMART Response VE Internet-enabled devices.	You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.






CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Install SMART Product Update in Full Mode	Select to install SMART Product Update (SPU) in Full mode.	In Full mode, users can view currently installed versions of SMART software and their product keys, and download and install updates.
Install SMART Product Update in Dashboard Mode	Select to install SPU in Dashboard mode.	In Dashboard mode, users can view only currently installed versions of SMART software and their product keys.
Do not install SMART Product Update	Select to not install SPU.	
Check for updates	Type the number of days (1 to 60) between SPU checks.	This option is available only if you install SPU in Full mode. By default, SPU checks for product updates every 30 days.
Notify users about SMART product updates	Select to notify users of available SMART product updates.	This option is available only if you install SPU in Full mode.
General Options: Adobe Flash Player		
Install Adobe Flash Player	Select to install Adobe Flash Player.	
SMART Notebook: Gallery Content		
See <i>Installing and maintaining Gallery content</i> on page 21.		
SMART Notebook: Team Content		
Team Content path	Type the path to the Team Content folder, which is a location on your school's network where users can store shared content.	For information on creating a Team Content folder, see <i>Creating or connecting to Team Content folders</i> on page 29.
SMART Notebook: My Content		
My Content path	Type the path to the My Content folder, which is a location on the user's computer where he or she can store individual content.	You can include environment variables in the path (for example, `\${HOME}/My Content`).
SMART Notebook: Customer Experience		
Prompt users to choose to participate in the Customer Experience Program	Select to allow the user to enable or disable the Customer Experience Program.	When the software first starts, it will ask the user whether he or she wants to participate in the Customer Experience Program.
Enable the Customer Experience Program on all computers	Select to automatically enable the Customer Experience Program for the user.	

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Disable the Customer Experience Program on all computers	Select to automatically disable the Customer Experience Program for the user.	
SMART Response: Setup Tool		
SMART Response LE	Select to enable students to answer questions with SMART Response LE clickers.	
SMART Response PE	Select to enable students to answer questions with SMART Response PE clickers.	
SMART Response XE	Select to enable students to answer questions with SMART Response XE clickers.	
SMART Response/Senteo	Select to enable students to answer questions with SMART Response or Senteo™ clickers.	
SMART Response VE	Select to enable students to answer questions with SMART Response VE Internet-enabled devices.	

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Multiple SMART Response devices in the same class	Select to enable students to answer questions with Senteo, SMART Response, SMART Response LE, SMART Response PE or SMART Response XE clickers. Select the Include SMART Response VE check box to also enable students to answer questions with SMART Response VE Internet-enabled devices.	
SMART Response: Optional Settings		
Start Desktop Menu at log in for all users?	Select to start SMART Response software when the user logs on.	
SMART Product Drivers: Optional Settings		
Start SMART Board Tools at logon	Select to start SMART Board™ Tools when the user logs on.	

Removing SMART Install Manager

You can remove SMART Install Manager from your computer if you no longer need it. You can do this using SMART Uninstaller or Terminal.

■ To remove SMART Install Manager using SMART Uninstaller

1. In the Finder, browse to **/Applications/SMART Technologies**, and then double-click **SMART Uninstaller**.

The *SMART Uninstaller* window appears.

2. Select **Install Manager**, and then click **Remove**.

A dialog box appears, prompting you to confirm the removal.

3. Click **OK**.
4. Type your administrator password, and then click **OK**.

■ To remove SMART Install Manager using Terminal

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

CHAPTER 2

Customizing installation packages

2. Type the following command:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i com.smarttech.instllmgr10
```

3. Press RETURN.
4. Type your administrator password, and then press RETURN.

Chapter 3

Deploying the software

Deploying the software.....	11
Activating the software after installation.....	12

After you customize the software with SMART Install Manager, you can deploy MPKG files to the computers on your network.

NOTE

You might need to manually activate the software after you deploy it.

Deploying the software

There are many methods for deploying software installation packages. The following are two common methods:

- Use Apple Remote Desktop software to manage your software installations.
- Use Terminal to install customized software on each computer.

NOTE

For more information on using Apple Remote Desktop software, refer to the documentation you received with the software.

To deploy SMART software using Apple Remote Desktop software

1. Copy the MPKG file that you created with SMART Install Manager to a server that is accessible to all the computers you want to install the software on.
2. Using Apple Remote Desktop software on the server, select the computers that you want to update.
3. Select **Install Packages**.
A dialog box appears.

CHAPTER 3

Deploying the software

4. Drag the MPKG file to the *Packages* box in the dialog box.
5. Click **Install**.

The software installs on the selected computers.

■ To deploy SMART software using Terminal

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo installer -target / -pkg "[Path]/[File name].mpkg"
```

Where

- *[Path]* is the path to the MPKG file.
- *[File name]* is the name of the MPKG file.

NOTE

This command installs only SMART Notebook software, SMART Product Drivers and SMART Response software if you haven't customized the MPKG file using SMART Install Manager.

3. Press RETURN.
4. Type your administrator password, and then press RETURN.

Activating the software after installation

There are two situations in which the software doesn't activate completely:

- **Imaging a computer:** For the software to activate properly, each computer you install it on must have a unique installation ID. If you use a computer image or clone a hard drive to set up multiple computers, they all have the same installation ID as the original computer, which can cause an activation error.
- **Protecting software for computer configurations:** If you use system recovery or protection software, you should activate the software before you lock or freeze the computer for your users. However, if you can't, you must activate the software afterward.

Run the activation wizard while connected to the network or complete the following procedure to activate the software on each computer.

■ To activate SMART Notebook software after installation

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo /Library/Application\ Support/SMART\ Technologies/  
activationwizard.app/Contents/MacOS/activationwizard  
--puid notebook_10a --uipack notebook_10 --m=4 --v=2 --pk  
[Product key] --a
```

Where *[Product key]* is the software product key.

3. Press RETURN.
4. Type your administrator password, and then press RETURN.

■ To activate SMART Response software after installation

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo /Library/Application\ Support/SMART\ Technologies/  
activationwizard.app/Contents/MacOS/activationwizard  
--puid response_3a --uipack response_3 --m=4 --v=2 --pk [Product  
key] --a
```

Where *[Product key]* is the software product key.

3. Press RETURN.
4. Type your administrator password, and then press RETURN.

i NOTE

This command is applicable only if you're running SMART Response software in VE mode (where students answer questions with Internet-enabled devices). Instructions for activating all other modes are included in the SMART Response documentation.

■ To activate SMART Sync Teacher software after installation

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

CHAPTER 3

Deploying the software

2. Type the following command:

```
sudo /Library/Application\ Support/SMART\ Technologies/  
activationwizard.app/Contents/MacOS/activationwizard  
--puid sync_10 --m=4 --v=1 --pk [Product key] --a
```

Where *[Product key]* is the software product key.

3. Press RETURN.
4. Type your administrator password, and then press RETURN.

Chapter 4

Updating the software

SMART periodically releases updates to its software. These updates add new features and resolve issues.

Go to smarttech.com/software to download the latest updates.

■ To update software

1. Download the DMG file from the website.
2. In the Finder, browse to and double-click **/Applications/SMART Technologies/Install Manager**.

The *SMART Install Manager* window appears.

3. Open the DMG file you downloaded in step 1 in SMART Install Manager (see *Opening an installation package* on page 4).
4. Customize the file by setting the controls on each page.

OR

Apply customizations that you previously created for an earlier version and saved in an XML file (see *Saving your changes* on page 5) by selecting **File > Import**, browsing to the XML file, and then clicking **Open**.

5. Publish your customizations as an MPKG file (see *Publishing your changes as an MPKG file* on page 5), and then deploy the MPKG file to computers on your network (see *Deploying the software* on page 11).

Chapter 5

Removing the software

After deploying SMART software, you can use Apple Remote Desktop software or Terminal to remove the software.

NOTE

For more information on using Apple Remote Desktop software, refer to the documentation you received with the software.

To remove software using Apple Remote Desktop software

1. Using Apple Remote Desktop software on the server, select the computers that you want to update.
2. Click **UNIX**.
A dialog box appears.

CHAPTER 5

Removing the software

3. If you want to remove all SMART software, type the following command:

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
--all
```

i NOTE

This command removes all SMART 2011 and later software.

OR

If you want to remove select SMART software, type one of the following commands:

- o SMART Notebook software

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i com.smarttech.notebook10
```

i NOTE

If any SMART Notebook dependent software, such as SMART Response software, is installed, the above command removes it automatically.

- o SMART Product Drivers

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i com.smarttech.boardDrivers.pkg
```

- o SMART Response software

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i com.smarttech.senteol
```

- o SMART Sync Teacher software

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i com.smarttech.SMARTSyncTeacher.pkg
```

4. Under *Run command as*, click **User**, and then specify the root user.
5. Click **Send** to remove the software from your network computers.

■ To remove all SMART software using Terminal

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall" --all
```

3. Press RETURN.
4. Type your administrator password, and then press RETURN.

NOTE

This command removes all SMART 2011 and later software.

■ To remove select SMART software using Terminal

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall" --list
```

3. Press RETURN.

A list of available package IDs appears.

CHAPTER 5

Removing the software

4. Type the following command:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i [Package ID]
```

Where *[Package ID]* is the ID of the package you want to remove.

i NOTE

You can type multiple instances of **-i [Package ID]** to remove multiple packages in the same command. For example:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i com.smarttech.notebook10 -i com.smarttech.boardDrivers.pkg
```

5. Press RETURN.
6. Type your administrator password, and then press RETURN.

Appendix A

Installing and maintaining Gallery content

Installing Gallery content.....	22
Installing Gallery content on each computer from the SMART website.....	22
Configuring Gallery content using SMART Install Manager.....	22
Installing Gallery content on each computer from a folder on your school's network.....	23
Downloading Gallery content.....	23
Configuring Gallery content using SMART Install Manager.....	24
Installing Gallery content in a central location.....	25
Downloading Gallery content.....	25
Configuring Gallery content using SMART Install Manager.....	26
Modifying Gallery content.....	27
Changing Gallery content locations.....	27
Starting the software in Administration mode.....	28
Changing the location of the My Content folder.....	28
Creating or connecting to Team Content folders.....	29
Connecting to an RSS feed.....	30
Removing Gallery content.....	31

Gallery content includes the following:

- Gallery Essentials, which is a collection of educational photos and other images, audio files, and Adobe Flash Player compatible files.
- Lesson Activity Toolkit, which contains objects teachers can use to create their own lesson activities.

You can access Gallery content from the *Gallery* tab.

Installing Gallery content

There are three options for installing Gallery content.

Option	Description
1	Install Gallery content on each user's computer from the SMART website.
2	Install Gallery content on each user's computer from a folder on your school's network.
3	Install Gallery content in a central location, and then configure the software to refer to that location.

TIP

The third option is ideal for environments where hard disk space on computers is limited.

Installing Gallery content on each computer from the SMART website

Configuring Gallery content using SMART Install Manager

Complete the procedure in this section to configure Gallery content.

To configure Gallery content using SMART Install Manager

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select the **SMART Notebook** check box (and the check boxes of any other products you want to install).
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Install the Gallery on each computer**.
6. In the *Destination location* box, type the path to the location on each computer where you want to install the Gallery collections (if you don't want to use the default folder **/Library/Application Support/SMART Technologies/SMART Notebook Galleries/SMART Technologies**).
7. Select the check boxes of the Gallery collections you want to install.
8. Publish your changes as an MPKG file, and then deploy the MPKG file.

Installing Gallery content on each computer from a folder on your school's network

Downloading Gallery content

Download Gallery content from the DVD or the Internet to a folder on your school's network following the procedures in this section, and then install the content on each computer from this folder.

NOTE

To download Gallery content from the DVD, you must have Gallery Setup on your computer. Gallery Setup is included with SMART Install Manager, SMART Notebook software and SMART Notebook SE (Student Edition) software.

To download Gallery content from the DVD

1. Insert the DVD in your computer's DVD drive.
2. If the DVD browser appears, close it.
3. In the Finder, select the DVD (under *Devices*), and then browse to the **/Content/Gallery Essentials** folder.
4. Double-click **SMARTEssentials.gallerycollection**.
The *Select a Gallery* dialog box appears.
5. Select the Gallery collection you want to install, and then click **OK**.
Gallery Setup starts.
6. In the *Content* tab, select the check boxes of the categories you want to include and clear the check boxes of the categories you don't want to include.
7. In the *Languages* tab, select the check boxes of the language packs you want to include and clear the check boxes of the language packs you don't want to include.

TIP

To see the language pack names in English, clear the **Show native names** check box.

8. In the *Installation folder for Gallery content* box, type the path to the folder where you want to store the Gallery collection.
9. Click **Next**.
Gallery Setup installs the selected Gallery collection.
10. Click **Finish**.

APPENDIX A

Installing and maintaining Gallery content

11. Repeat steps 3 to 9 for the Lesson Activity Toolkit (**/Content/Lesson Activity Toolkit/Lesson Activity Toolkit.gallerycollection**).

■ To download Gallery content from the Internet

1. Open the DVD software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select the **SMART Notebook** check box.
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Install the Gallery on each computer**.
6. Click **Download**, and then select the location to download the Gallery content to.
7. Click **Choose** to start the download.
8. Click **Close** when the download is complete.

Configuring Gallery content using SMART Install Manager

Complete the procedure in this section to configure Gallery content.

■ To configure Gallery content using SMART Install Manager

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select the **SMART Notebook** check box (and the check boxes of any other products you want to install).
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Install the Gallery on each computer**.
6. In the *Source location* box, type the path to the folder on your school's network that contains the Gallery content (if you downloaded Gallery collections to your school's network).
7. In the *Destination location* box, type the path to the location on each computer where you want to install the Gallery collections (if you don't want to use the default folder **/Library/Application Support/SMART Technologies/SMART Notebook Galleries/SMART Technologies**).

APPENDIX A

Installing and maintaining Gallery content

8. Clear the check boxes of the Gallery collections you don't want to install.
9. Publish your changes as an MPKG file, and then deploy the MPKG file.

Installing Gallery content in a central location

Downloading Gallery content

To place and use Gallery content in a central location on your school's network, you must first download the content from the DVD or the Internet to that location by performing one of the procedures in this section.

NOTE

To download Gallery content from the DVD, you must have Gallery Setup on your computer. Gallery Setup is included with SMART Install Manager, SMART Notebook software and SMART Notebook SE software.

To download Gallery content from the DVD

1. Insert the DVD in your computer's DVD drive.
2. If the DVD browser appears, close it.
3. In the Finder, select the DVD (under *Devices*), and then browse to the **/Content/Gallery Essentials** folder.
4. Double-click **SMARTEssentials.gallerycollection**.
The *Select a Gallery* dialog box appears.
5. Select the Gallery collection you want to install, and then click **OK**.
Gallery Setup starts.
6. In the *Content* tab, select the check boxes of the categories you want to include and clear the check boxes of the categories you don't want to include.
7. In the *Languages* tab, select the check boxes of the language packs you want to include and clear the check boxes of the language packs you don't want to include.

TIP

To see the language pack names in English, clear the **Show native names** check box.

8. In the *Installation folder for Gallery content* box, type the path to the folder where you want to store the Gallery collection.
9. Click **Next**.
Gallery Setup installs the selected Gallery collection.

APPENDIX A

Installing and maintaining Gallery content

10. Click **Finish**.
11. Repeat steps 3 to 9 for the Lesson Activity Toolkit (**/Content/Lesson Activity Toolkit/Lesson Activity Toolkit.gallerycollection**).

■ To download Gallery content from the Internet

1. Open the DVD software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select the **SMART Notebook** check box.
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Share Gallery content with all computers from a common network location**.
6. If you want to download the Gallery Essentials collection, click **Install** beside *Essentials for Educators*, and then follow the on-screen instructions.
7. If you want to download the Lesson Activity Toolkit collection, click **Install** beside *Lesson Activity Toolkit*, and then follow the on-screen instructions.

Configuring Gallery content using SMART Install Manager

Complete the procedure in this section to configure Gallery content.

■ To configure Gallery content using SMART Install Manager

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select the **SMART Notebook** check box (and the check boxes of any other products you want to install).
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Share Gallery content with all computers from a common network location**.
6. In the *Gallery location* box, type the path to the folder on your school's network that contains the Gallery content.
7. Publish your changes as an MPKG file, and then deploy the MPKG file.

Modifying Gallery content

After installing the software, you can modify Gallery content using Gallery Setup.

■ To run Gallery Setup

1. In the Finder, browse to **/Applications/SMART Technologies/SMART Tools**.
2. Double-click **Gallery Setup**.
3. Type your administrator password, and then click **OK**.

The *Select a Gallery* dialog box appears.

4. Select the Gallery collection you want to modify, and then click **OK**.

Gallery Setup starts.

5. In the *Content* tab, select the check boxes of the categories you want to include and clear the check boxes of the categories you don't want to include.
6. In the *Languages* tab, select the check boxes of the language packs you want to include and clear the check boxes of the language packs you don't want to include.



TIP

To see the language pack names in English, clear the **Show native names** check box.

7. In the *Installation folder for Gallery content* box, type the path to the folder where you want to store the Gallery collection.
8. Click **Next**.
Gallery Setup updates the selected Gallery collection.
9. Click **Finish**.

Changing Gallery content locations

After installing the software, you can do the following:

- Change the location of the **My Content** folder.
- Create or connect to a **Team Content** folder.
- Connect to an RSS feed.

APPENDIX A

Installing and maintaining Gallery content

Starting the software in Administration mode

Before you can maintain content folders, you must start the software in Administration mode.

■ To start SMART Notebook software in Administration mode

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo /Applications/SMART\ Notebook/Notebook.app/Contents/  
MacOS/Notebook -admin
```

3. Press RETURN.
4. Type your administrator password, and then press RETURN.


SMART Notebook software starts in Administration mode.

Changing the location of the My Content folder

The **My Content** folder is a location where teachers and students can store content for their individual use.

You can specify the location of the **My Content** folder during installation. If you don't specify a location, the default location is **/Library/Application Support/SMART Technologies Inc/Gallery/My Content**.

■ To change the location of the My Content folder after installation

1. Start the software in Administration mode (see *Starting the software in Administration mode* above).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Click **Browse**.
The *Open* dialog box appears.
5. Browse to and select the new **My Content** folder, and then click **Open**.

APPENDIX A

Installing and maintaining Gallery content

6. Click **Close**.
7. Close the software.


Creating or connecting to Team Content folders

All users can create new content and save it in their **My Content** folders. To allow users to share content, you must create or connect to a **Team Content** folder.

TIP

If you create a **Team Content** folder on a computer's hard disk, the folder is available only to users of that computer. However, if you create a **Team Content** folder on a server, the folder is available to all users on the school's network with read and write access to the folder.


To create a new Team Content folder

1. Start the software in Administration mode (see *Starting the software in Administration mode* on the previous page).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Click **Create New**.
The *Open* dialog box appears.
5. Browse to and select the folder you want to designate as a **Team Content** folder, and then click **Open**.
6. Click **Close**.
7. Close the software.

To connect to an existing Team Content folder

1. Start the software in Administration mode (see *Starting the software in Administration mode* on the previous page).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

APPENDIX A


Installing and maintaining Gallery content

4. Click the **+** button.

The *Open* dialog box appears.

5. Browse to and select the **Team Content** folder, and then click **Open**.
6. Click **Close**.
7. Close the software.

■ To disconnect a Team Content folder

1. Start the software in Administration mode (see *Starting the software in Administration mode* on page 28).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Select the folder in the *Team Content* list, and then click the **–** button.

IMPORTANT

If you installed the Gallery Essentials and Lesson Activity Toolkit collections, folders for those collections appear in the *Team Content* list. Do not remove these folders from the list, or users will not be able to access these collections.

5. Click **Close**.
6. Close the software.

Connecting to an RSS feed


You can connect to a public or private RSS feed to send information to your school's SMART Notebook software and SMART Notebook SE software users through the *Gallery* tab.

RSS is a format for delivering regularly changing web content. Many news-related websites, blogs and other publishers broadcast their content as RSS feeds.

APPENDIX A

Installing and maintaining Gallery content

■ To connect to an RSS feed

1. Start the software in Administration mode (see *Starting the software in Administration mode* on page 28).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Type the URL of the RSS feed in the *Online Resources* box.
5. Click **Close**.
6. Close the software.

Removing Gallery content

You can use Apple Remote Desktop software or Terminal to remove Gallery content.

■ To remove Gallery collections using Apple Remote Desktop software

1. Using Apple Remote Desktop software on the server, select the computers that you want to update.

2. Click **UNIX**.

A dialog box appears.

3. For each Gallery collection you want to remove, type the appropriate command:

- Gallery Essentials

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i gallery.smarttech.com
```

- Lesson Activity Toolkit

```
"/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i fd16a709-8b28-4662-b5bd-63dc86eeb34e.com
```

4. Under *Run command as*, click **User**, and then specify the root user.
5. Click **Send** to remove the Gallery collections from your network computers.

APPENDIX A

Installing and maintaining Gallery content

■ To remove Gallery collections using Terminal

1. In the Finder, browse to **/Applications/Utilities**, and then double-click **Terminal**.

The *Terminal* window appears.

2. Type the following command:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall" --list
```

3. Press RETURN.

A list of available package IDs appears.

4. Type the following command:

```
sudo "/Applications/SMART Technologies/  
SMART Uninstaller.app/Contents/Resources/uninstall"  
-i [Package ID]
```

Where *[Package ID]* is the ID of the Gallery collection you want to remove.

NOTE

You can type multiple instances of **-i [Package ID]** to remove multiple packages in the same command.

5. Press RETURN.
6. Type your administrator password, and then press RETURN.

Index

A

activation	12
Administration mode	28
Apple Remote Desktop software	11, 17

C

checklist	i
computer imaging	12
computer requirements	2

D

DMG files	15
downloads	2

G

Gallery content	
changing location of	27
installing	22
modifying	27
Gallery Essentials	21

H

hard disk space	2
-----------------	---

I

imaging	12
installation overview	i

L

Lesson Activity Toolkit	21
-------------------------	----

M

Mac OS X operating system software	2
MPKG files	2, 5, 11, 15
My Content folder	7, 28

O

overview	i
----------	---

P

prerequisites	
computer	2
knowledge	1
protection software	12

R

RAM	2
requirements	2

S

SMART Install Manager	
downloading	3
installing	3
removing	9
using	4
SMART Response LE	8
SMART Response PE	8

INDEX

SMART Response VE	8
SMART Response XE	8
system recovery software	12

T

Team Content folders	29
Terminal	11, 13, 17

U

updates	15
---------	----

X

XML	5
-----	---

SMART Technologies

smarttech.com/support

smarttech.com/contactsupport

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>