

Oster®

User Manual

COFFEEMAKERS

Models 7982-33, 7983-33

7984-33, 7985-33

and 7988-33



 QUESTIONS? COMMENTS? IN CANADA: 1 800 667-8623

www.oster.com

P.N. 114421

IMPORTANT SAFEGUARDS

To reduce the risk of fire, electric shock and/or injury to persons, basic safety precautions should always be followed when using electrical appliances, including the following:

1. READ ALL INSTRUCTIONS BEFORE USING THE COFFEEMAKER.
2. Do not touch the coffeemaker's hot surfaces. Use handles or knobs.
3. To protect against electric shock, do not immerse the power cord, power plug or coffeemaker in water or in any other liquid.
4. Close adult supervision is necessary when this appliance is used by or near children.
5. Turn the coffeemaker OFF and unplug the power cord from the power source when the coffeemaker and clock are not in use and before cleaning. Allow the coffeemaker parts to cool before putting on or taking off parts and before cleaning the appliance.
6. Do not operate any appliance with a damaged power cord or power plug, or operate it after the appliance malfunctions, or has been damaged in any manner. Return this appliance only to the nearest Authorized Service Center for examination, repair or adjustment.
7. The use of accessory attachments other than OSTER®/MR. COFFEE® brand products may cause hazards or injuries.
8. Do not use the coffeemaker outdoors.
9. Do not let the power cord hang over edge of table or counter, or allow it to come into contact with hot surfaces.
10. Do not place this coffeemaker on or near a hot gas stove or electric burner or in a heated oven.
11. To disconnect the coffeemaker, turn it off, then remove the power plug from the power supply.
12. Place the appliance on a hard, flat, level surface to avoid interruption of air-flow underneath the coffeemaker.
13. Avoid contact with any moving parts.
14. This coffeemaker is designed for household use only.



WARNING! To reduce the risk of fire or electric shock, do not remove any service covers. There are no user serviceable parts inside the coffeemaker. Only authorized personnel should repair the coffeemaker.

Please read ALL of the instructions in this manual carefully before you begin to use this appliance. Proper care and maintenance will ensure a long life and a trouble-free operation for this appliance. Please save these instructions and refer to them for cleaning and care tips.

SAVE THESE INSTRUCTIONS

contents

Table of Contents

Important Safeguards	2
Table of Contents	3
Introduction	4
Decanter Use and Care	4
Special Cord Set Instructions	4
Parts Diagram	5
Coffeemaker Features and Benefits	7
Clean Your Coffeemaker Before Using the First Time	8
Setting the Clock and Delay Brew Time	9
Preparing for Use	10
• Suggested Coffee Measurement Chart	
• Adding Water and Ground Coffee	
Brewing Coffee Now	12
Brewing Coffee Later (Delay Brew)	14
Cleaning and Maintaining Your Coffeemaker	15
Troubleshooting Your Oster® Coffeemaker	18
Service and Maintenance	20
Notes	21
Warranty Information	22

introduction

Introduction

Welcome and congratulations on the purchase of your new Oster® coffeemaker. Your new coffeemaker will wake up with you in the morning and provide you breaks and treats during your hectic daily activities. How you enjoy your Oster® coffeemaker is up to you!

Decanter Use and Care

Follow the instructions below to reduce or eliminate the chance of breaking the glass decanter:

- This decanter is designed for use with your Oster® coffeemaker and therefore must never be used on a range top or in any oven, including a microwave oven.
- Do not set a hot decanter on a wet or cold surface.
- Do not use a cracked decanter or a decanter having a loose or weakened handle.
- Do not clean the decanter with abrasive cleaners, steel wool pads or other abrasive materials.
- Discard the decanter immediately if it is ever boiled dry.
- Protect the decanter from sharp blows, scratches or rough handling.


Special Cord Set Instructions

1. A short power supply cord is provided to reduce the hazards resulting from a person or pet becoming entangled in, or tripping over, a longer cord.
2. An extension cord may be purchased and used if care is exercised in its use.
3. If an extension cord is used, the marked electrical rating of the extension cord must be at least 10 amps and 120 volts. The resulting extended cord must be arranged so that it will not drape over a countertop or tabletop where it can be pulled on by children or tripped over accidentally.
4. This appliance has a polarized plug (one blade is wider than the other). To reduce the risk of electric shock, this plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not modify the plug in any way.

You can customize the length of the power cord so that it is the exact length you desire. To increase the length of the power cord: grasp the power cord (not the power plug) and gently lift it out of the slot, then pull it away from the coffeemaker. To decrease the length of the power cord: Grasp the power cord (not the power plug), lift it out of the slot and gently feed it into the coffeemaker. Lock the cord in the slot when finished.


Parts Diagram

parts

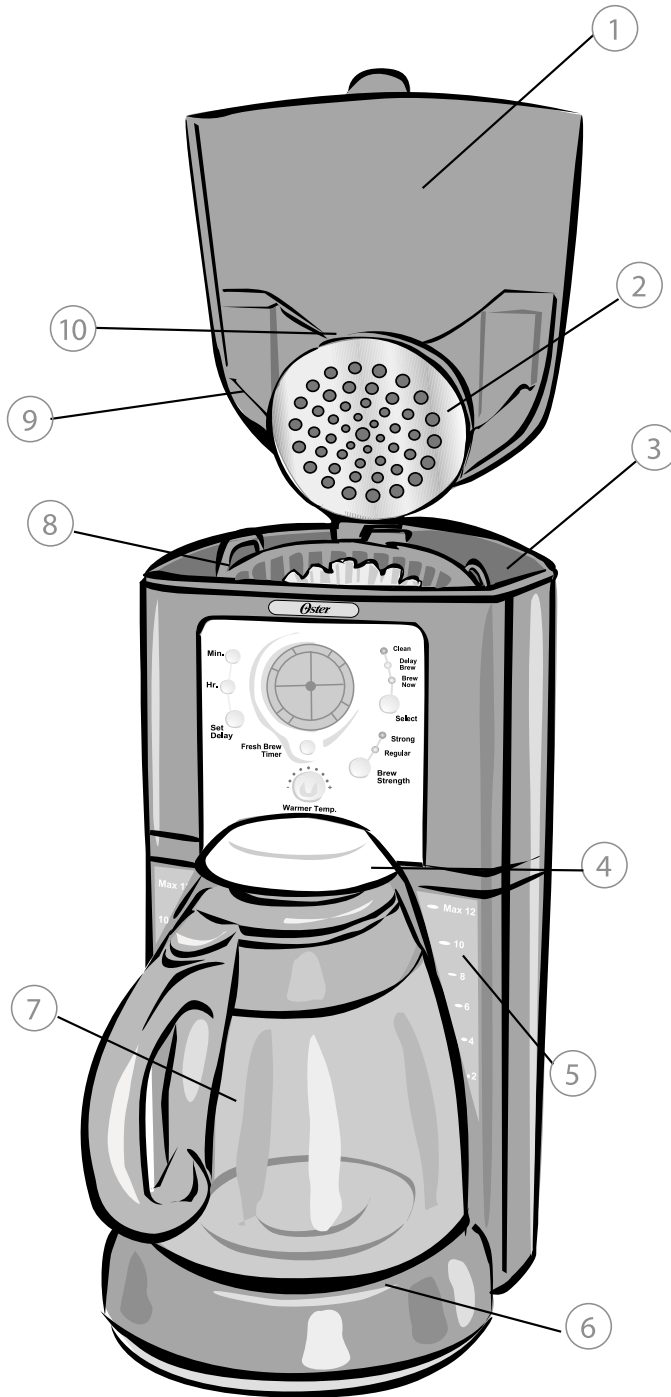

1. Filter Basket Lid
2. Shower Head Cover
3. Water Reservoir
4. Pause 'n Serve
5. Dual Water Windows
6. Warmer Plate
7. Decanter
8. Removable Filter Basket
9. Water Reservoir Pour Through Lid
10. Shower Head


Control Panel, Switch Models (7982-33 and 7983-33)

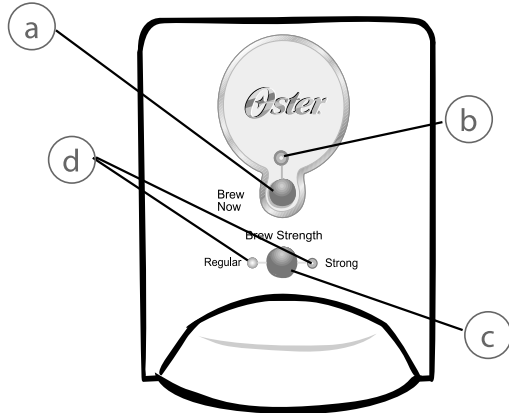

- a. Brew Now Button (On/Off)
- b. On Indicator
- c. Brew Strength Button
- d. Brew Strength Indicators (Regular/Strong)

Control Panel, Programmable Models (7984-33, 7985-33 and 7988-33)

- e. Clock Display / FRESH BREW™ Timer Display
- f. Clock Display / FRESH BREW™ Timer Display Button
- g. Brew Now Indicator
- h. Delay Brew Indicator
- i. Clean Cycle Indicator
- j. Select Button
- k. Hour Button
- l. Minute Button
- m. Set Delay Button
- n. Warmer Temperature Knob
- o. Brew Strength Button
- p. Brew Strength Indicators (Regular/Strong)

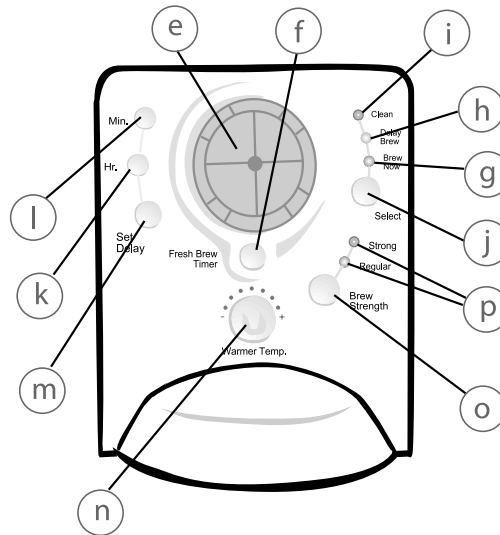

Coffeemaker Features

features

Your new Oster® coffeemaker has the following features:

- **12-cup Brewing Capacity**
- **Brew Basket with Removable Filter Insert** – The filter basket insert lifts out of the brew basket for fast and easy cleaning and filling.
- **Pause ‘n Serve** – Can’t wait for the coffee to finish brewing? The Pause ‘n Serve feature allows you up to 30 seconds to pour a cup of coffee while the coffeemaker is still brewing. Carefully remove the decanter and the Pause ‘n Serve feature will be automatically activated, temporarily stopping the flow of coffee into the decanter.
- **Dual Water Windows** – Shows amount of water in the reservoir for accurate filling.
- **Non-Stick Warmer Plate** – This feature allows you to keep your coffee hot after brewing. The non-stick attribute prevents the decanter from sticking to the surface of the warming plate.
- **Brew Strength Selector** – Adjusts the brewing time to create a more full-flavoured coffee.
- **Cord Storage** – Safely stores excess cord to keep your countertop neat.
- **Removable Stainless Steel Shower Head Cover** – Allows you to take off the shower head cover for easy cleaning.
- **On/Off Indicator Light** – Lets you know when your coffeemaker is “on”.
- **Two-Hour Auto Shut-off** – Keeps your coffee hot for two hours, then automatically beeps and shuts off.
- **Programmable Controls (on 7984-33, 7985-33, 7988-33 only):**
 - **Clock** – The clock serves as a handy kitchen clock and allows you to set the Delay Brew feature and functions as the FRESH BREW™ timer feature.
 - **FRESH BREW™ timer** – Did you ever wonder how long the coffee has been waiting for you? Now you know! The FRESH BREW™ timer feature counts up the freshness of your coffee from the beginning of the brew cycle up to 2 hours.
 - **Delay Brew** – Would you like to wake up to a fresh pot of coffee? The timer allows you to preset when you would like the coffeemaker to automatically brew your coffee, up to 24 hours in advance.

- **Adjustable Warmer Plate** – This feature allows you to keep your coffee hot after brewing and adjust the temperature to fit your taste.

- **Audible Ready Signal** – Beeps to alert you when the coffeemaker has finished the brew cycle.

- **Special Cleaning Cycle** – Enables you to easily maintain and clean your coffeemaker from mineral deposits.

NOTE: If you have selected any of the operating functions, the coffeemaker will act upon the last operation selected if the power is restored within 10 seconds after a power outage.

Clean Your Coffeemaker Before Using the First Time

Make sure your first cup of coffee is as good as can be by cleaning your Oster® coffeemaker before its first use. Just follow these simple steps:

1. Wash the decanter, decanter lid and the filter basket in a mixture of mild detergent and water. Rinse each thoroughly (please refer to the parts diagram listed above).
2. Replace all the parts and close the lid. Then, run a brew cycle with water only, without adding coffee and coffee filter.
3. When brewing is complete, turn your coffeemaker off, discard the water in the decanter and rinse the decanter, decanter lid and filter basket.

Your coffeemaker is now ready to use. Enjoy it!

Setting Up

Setting the Clock and Delay Brew Time

On programmable models (7984-33, 7985-33, 7988-33 only)

To Set the Clock:

1. Plug the power cord into a standard electrical outlet. The clock will flash on the control panel to indicate that the time has not been set yet.
2. Press and hold the HOUR and MINUTE buttons until you reach the current time. The AM or PM indicator will light at the top of the display (Figure 1 and 2)

The clock is now set!

NOTE: Pressing any button before setting the clock will cause the clock to start keeping time from 12:00 a.m. You must set the clock if you want to use the Delay Brew feature.

To Set the Delay Brew Time:

While the display is on the clock mode, simply press the SET DELAY button (Figure 3) and, while the DELAY BREW yellow light is flashing, set the brew time by pressing the HOUR and MINUTE buttons (Figure 4). The AM or PM indicator will light at the top of the clock display.

Within a few seconds the display will change to the current time.

The Delay Brew Time is now set!

NOTE: To activate the DELAY BREW cycle, see the "Brewing Coffee Later" section.

To check the programmed time, push the SET DELAY button. The display will show the time you have programmed the coffee to brew. If you press the SET DELAY button again or wait a few seconds, the display will switch back.




Figure 1




Figure 2




Figure 3




Figure 4

Preparing for Use

Selecting and Measuring Ground Coffee

For best results, use a level tablespoon for ground coffee measurement. Make sure you use medium grind coffee for a perfect brew.

Suggested Coffee Measurement Chart

To Brew	Ground Coffee
12 Cups	9 tbsp.
10 Cups	7.5 tbsp.
8 Cups	6.5 tbsp.
6 Cups	4.5 tbsp.
4 Cups	3 tbsp.
1 level tablespoon (tbsp) = 15 g./0.53 oz.	
1 Cup = 5 fl. oz. of brewed coffee	
Use more or less coffee to suit your taste.	

Adding Water and Ground Coffee

1. Lift and open the filter basket lid. For your convenience, you can lift out the removable filter basket.
2. Place a 10-12 cup paper basket-style filter or a permanent filter into the removable filter basket (Figure 5).

NOTE: If using paper filters, it is important that the sides of the filter fit flush against the side of the filter basket. If filter collapse occurs, dampen the filter before placing in the filter basket and adding ground coffee and water.

3. Add the desired amount of coffee and gently shake to level the coffee. See the **Suggested Coffee Measurement Chart**.
4. Be sure the filter is properly centered and all the way down in the outer filter basket.



Figure 5

5. Fill the decanter with cold, fresh water to the desired capacity (1 cup equals 5 ounces) (Figure 6). For easy and accurate filling, the water markings on the glass decanter and on the dual water windows show the amount of water needed to make the corresponding desired number of cups. Do not fill past the “12 cup MAX” line or water will flow out of the overflow hole in the back of the water reservoir.

The amount of coffee brewed will always be slightly less than the amount of water poured in the water reservoir. This is due to the minimum absorption of water by the coffee grounds.

6. Slowly pour the water through the pour through reservoir lid into the water reservoir. Close the lid and place the empty decanter onto the warmer plate.

NOTE: Make sure the decanter is fully placed on the warming plate or the water and the grounds will overflow from the filter basket. An overflow may cause personal injury or damage to property.



CAUTION! To reduce the risk of damaging the decanter and/or the risk of personal injury, do not add cold water to the decanter if the decanter is already hot. Allow the decanter to cool before using.



Figure 6

Brewing Coffee Now

1. After completing the steps in the “Adding Water and Coffee” section and with the glass decanter and the filter basket securely in place, turn the coffeemaker on.

For Switch models, press “On” button and the on light will come on.




For Programmable models: press the SELECT button once to turn the coffeemaker on. The BREW NOW green light will turn on to signal that the coffeemaker is on and brewing. The green regular strength light will come on to show that you are brewing a regular strength carafe of coffee. The Audible Ready Signal will beep when the brew cycle is complete.

2. To enjoy a more full flavoured cup of coffee, press the Brew Strength button once. The STRONG Brew Strength red light will come on. The coffeemaker will remain in the Brew Strength you have selected until you change it back to the regular strength by pressing the Brew Strength button or until you unplug the machine.

3. After the used coffee grounds have cooled, carefully open the filter basket and discard them.

NOTE: Shower head cover is hot after brewing. Always allow the coffeemaker to cool down before cleaning.

4. Prior to making a second pot of coffee, turn the unit off. This will reset the FRESH BREW™ timer feature. Switch models - Make sure you turn the coffeemaker off and then back on before brewing more coffee, otherwise the two-hour auto shut-off time period will not be restarted.





5. Make sure the decanter is empty before starting to brew coffee.
6. Be sure to turn your coffeemaker off when no longer using it.

The FRESH BREW™ timer Feature (on 7984-33, 7985-33, 7988-33 only)

The FRESH BREW™ timer feature counts up from the moment the brewing cycle starts up to 2 hours. At the start of the brew cycle, the FRESH BREW™ timer feature will automatically be activated and the clock display will change to show the time since brewing began. Incremental segments of the FRESH BREW™ timer feature will start to darken as an indication of how long the coffee has been waiting for you.

Press the FRESH BREW™ timer button once for the display to go back to the clock function (while on the clock mode, the FRESH BREW™ timer feature will keep counting). Press it again to go back to the FRESH BREW™ timer display. The display will automatically change back to the clock after 2 hours or when the unit is turned off.

NOTE: The BREW green light needs to be on for the FRESH BREW™ timer feature to operate. The time and delay start times cannot be set when fresh brew time is displayed.

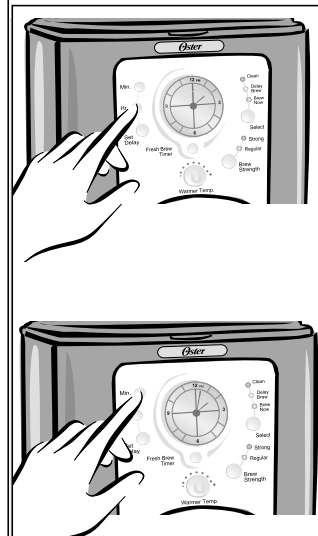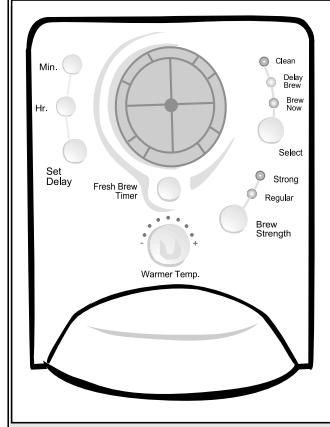

Brewing Coffee Later



(DELAY BREW on 7984-33, 7985-33, 7988-33 only)

1. You must first set the time for when you would like the coffeemaker to begin brewing your coffee as described in "Setting the Clock and the Delay Brew Timer" section.
2. Prepare your coffeemaker as described in "Adding Water and Ground Coffee" section.
3. To activate DELAY BREW and program your coffeemaker to brew coffee at a later time, press the SELECT button twice. The yellow DELAY BREW light will illuminate. The coffeemaker is now set to automatically brew coffee at the pre-set later time. At this time the brew strength light will illuminate. You can select the strength that you desire by pressing the BREW STRENGTH button.
4. At the pre-set time the green BREW NOW light will go on and the DELAY BREW yellow light will go off, indicating the brewing has started in the selected brew strength. The FRESH BREW™ timer feature will start.
5. The Audible Ready Signal will beep when the brew cycle is complete. The coffeemaker warmer plate will keep your coffee hot for 2 hours and then will automatically turn off.

As a safety feature, your coffeemaker will NOT start again automatically the next day. If you want your coffee to brew at the same time the following day, simply add a new filter, coffee and water and set DELAY BREW, by repeating steps 2 and 3 above.

To cancel BREW:

Press the SELECT button. The DELAY BREW yellow indicator light will go off.



maintenance

Cleaning and Maintaining Your Coffeemaker

Daily Cleaning

Always unplug the coffeemaker and allow to cool before cleaning.

Remove the filter basket, shower head cover “by turning it counterclockwise”, decanter and decanter lid and wash them in a solution of hot water and mild liquid soap.

Never use abrasive cleansers, steel wool pads or other abrasive materials. Dishwasher top rack safe parts: glass decanter and lid, filter basket and stainless steel shower head.



CAUTION! Never immerse the coffeemaker itself in water, in any other liquid or place in the dishwasher.

Regular Cleaning and Maintenance

Decalcifying Your Oster® coffeemaker

Minerals (calcium/limestone) found in water will leave deposits in your coffeemaker and will affect it. It's recommended that you regularly remove these deposits by using white household vinegar.

For Switch Models (7982-33/7983-33):

1. Pour four cups (32 fluid ounces) of undiluted white household vinegar into the water reservoir.
2. Place an empty 10-12 cup basket-style paper filter or permanent filter into the filter basket and close.
3. Place the empty decanter back in the unit, centered on the warmer plate.
4. Brew three cups of vinegar through the coffeemaker.
5. Turn the coffeemaker off and let stand for 30 minutes.
6. Run the remainder of the vinegar through the coffeemaker.
7. Discard the vinegar and rinse the decanter thoroughly with clean water
8. Fill the water reservoir with clean, fresh water.
9. Place the empty decanter back on the coffeemaker, centered on the warmer plate.
10. Remove and discard the filter used during the cleaning cycle and replace it with a fresh 10-12 cup basket-style paper filter. If a permanent filter was used during cleaning, remove it and rinse it thoroughly before replacing it in the filter basket.

maintenance

11. Begin brewing and allow the full brew cycle to complete.

12. Repeat steps 8 through 11 one more time.

Your coffeemaker is now clean and ready to brew the next pot of delicious, hot coffee!

For Programmable models (7984-3, 7985-33, 7988-33):

Follow steps 1-3 above. Press the SELECT button until the red CLEAN indicator light is illuminated. For your convenience the cleaning cycle is automatic. The entire cycle will take 45-60 minutes to complete. During the cleaning your coffeemaker will:

1. Slow brew approx. 3 cups of vinegar.
2. Pause for 30 minutes (the CLEAN light will remain on to alert you that the process is active). At the end of the pause period your coffeemaker will beep.
3. After 30 minutes, your coffeemaker will brew the remainder of the vinegar.
4. When complete, the CLEAN light will turn off and your coffeemaker will automatically beep and shut off. Follow Steps 7-12 above to thoroughly rinse out the coffeemaker.

Suggested Decalcifying Interval

Type of Water	Cleaning Frequency
Soft Water	Every 80 Brew Cycles
Hard Water	Every 40 Brew Cycles
or when red light is flashing (programmable models)	

maintenance

Cleaning the decanter

Hard water can leave a whitish stain on the decanter, and coffee may then turn this stain brown.

To remove decanter stains:

1. Fill the decanter with a solution of equal parts water and vinegar and let the solution stand in the decanter for approximately 20 minutes.
2. Discard the solution, then wash and rinse the decanter.

Do not use harsh abrasive cleaners that may scratch the decanter, scratches may cause the decanter to break.

troubleshooting

Troubleshooting your Oster® Coffeemaker

Your Oster® Coffeemaker has been carefully designed to give you many years of trouble-free service. In the unlikely event that your new coffeemaker does not operate satisfactorily, please review the following potential problems and try the steps recommended BEFORE you call an Authorized Sunbeam Service Center.

PROBLEM	POSSIBLE CAUSE	SOLUTION
The BREW NOW/ON light does not light up	<ul style="list-style-type: none">• The appliance is unplugged• There's a power outage	<ul style="list-style-type: none">• Plug unit in• Wait for power to be restored
The coffee is not brewing	<ul style="list-style-type: none">• The appliance is unplugged• There's a power outage• The water reservoir is empty• The filter basket is not properly inserted• The decanter is not placed all the way in on the warmer plate	<ul style="list-style-type: none">• Plug unit in• Wait for power to be restored• Check the water window• Insert filter basket correctly• Place decanter correctly on warmer plate
The coffeemaker brews slowly	<ul style="list-style-type: none">• The coffeemaker needs cleaning	<ul style="list-style-type: none">• Clean coffeemaker slowly as described in "Cleaning and Maintaining" section
The Filter Basket overflows	<ul style="list-style-type: none">• The filter basket is not properly inserted• The decanter is not placed all the way on the warming plate• The decanter lid is not on the decanter• Too many coffee grounds were placed in the filter• The decanter was removed from the warmer plate for more than 30 seconds	<ul style="list-style-type: none">• Insert Filter Basket correctly• Place decanter correctly on warmer plate• Place lid on the decanter• Remove filter, discard grounds. If paper filter, replace. If permanent filter, rinse. Begin brewing process again• Turn off and unplug the unit. Allow to cool. Wipe up the spill. Do not set hot decanter back on the wet warmer plate or it might crack

troubleshooting

Troubleshooting (cont.)

PROBLEM	POSSIBLE CAUSE	SOLUTION
The coffee is not hot	<ul style="list-style-type: none">• There's a power outage• Auto SHUT-OFF has been activated	<ul style="list-style-type: none">• Wait for power to be restored• For best results, brew a fresh pot of coffee
The coffee tastes bad	<ul style="list-style-type: none">• Coffee grounds other than for an automatic drip coffeemaker were used• The ground coffee-to-water ratio was unbalanced• The coffeemaker needs cleaning	<ul style="list-style-type: none">• Use coffee grind recommended for automatic drip coffeemakers• Use correct ground coffee-to-water ratio• Clean coffeemaker as described in "Maintaining your Coffeemaker" section
The grounds are in the coffee	<ul style="list-style-type: none">• The filter is not properly seated in the basket• The filter collapsed	<ul style="list-style-type: none">• Seat filter properly within the filter basket• Remove filter and replace

Do you still have questions? You can call us toll-free at our Consumer Service Department at 1-800-667-8623 or you can visit us at www.oster.com

Service and Maintenance

Replacement Parts

- Decanters – You can usually purchase a replacement decanter from the store where you purchased your coffeemaker. If you are unable to find a replacement, please call **1-800-667-8623** in Canada or **1-800-672-6333** in the U.S.

Repairs

If your coffeemaker requires service, do not return it to the store where you purchased it. All repairs and replacements must be made by Sunbeam or by an authorized Sunbeam® Service Center. If you live in the U.S. or Canada, please call us at the following toll-free telephone numbers to find the location of the nearest authorized service center:

Canada: 1-800-667-8623

U.S.: 1-800-672-6333

To assist us in serving you, please have the coffeemaker model number and date of purchase available when you call. The model number is stamped on the bottom metal plate of the coffeemaker.

We welcome your questions, comments or suggestions. In all your communications, please include your complete name, address and telephone number and a description of the problem.

One Year Limited Warranty

Sunbeam Products, Inc., or if in Canada, Sunbeam Corporation (Canada) Limited (collectively "Sunbeam") warrants that for a period of one year from the date of purchase, this product will be free from defects in material and workmanship. Sunbeam, at its option, will repair or replace this product or any component of the product found to be defective during the warranty period. Replacement will be made with a new or remanufactured product or component. If the product is no longer available, replacement may be made with a similar product of equal or greater value. This is your exclusive warranty.

This warranty is valid for the original retail purchaser from the date of initial retail purchase and is not transferable. Keep the original sales receipt. Proof of purchase is required to obtain warranty performance. Sunbeam dealers, service centers, or retail stores selling Sunbeam products do not have the right to alter, modify or any way change the terms and conditions of this warranty.

This warranty does not cover normal wear of parts or damage resulting from any of the following: negligent use or misuse of the product, use on improper voltage or current, use contrary to the operating instructions, disassembly, repair or alteration by anyone other than Sunbeam or an authorized Sunbeam service center. Further, the warranty does not cover: Acts of God, such as fire, flood, hurricanes and tornadoes.

What are the limits on Sunbeam's Liability?

Sunbeam shall not be liable for any incidental or consequential damages caused by the breach of any express, implied or statutory warranty or condition.

Except to the extent prohibited by applicable law, any implied warranty or condition of merchantability or fitness for a particular purpose is limited in duration to the duration of the above warranty.

Sunbeam disclaims all other warranties, conditions or representations, express, implied, statutory or otherwise.

Sunbeam shall not be liable for any damages of any kind resulting from the purchase, use or misuse of, or inability to use the product including incidental, special, consequential or similar damages or loss of profits, or for any breach of contract, fundamental or otherwise, or for any claim brought against purchaser by any other party.

Some provinces, states or jurisdictions do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above limitations or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights that vary from province to province, state to state or jurisdiction to jurisdiction.

How to Obtain Warranty Service

In the U.S.A.

If you have any question regarding this warranty or would like to obtain warranty service, please call 1 800 672-6333 and a convenient service center address will be provided to you.

In Canada

If you have any question regarding this warranty or would like to obtain warranty service, please call 1 800 667-8623 and a convenient service center address will be provided to you.

In the U.S.A., this warranty is offered by Sunbeam Products, Inc., located in Boca Raton, Florida 33431. In Canada, this warranty is offered by Sunbeam Corporation (Canada) Limited, located at 5975 Falbourne Street, Mississauga, Ontario L5R 3V8.

PLEASE DO NOT RETURN THIS PRODUCT TO ANY OF THESE ADDRESSES OR TO THE PLACE OF PURCHASE.

Printed in China

© 2004 Sunbeam Products, Inc. Boca Raton FL 33431. All rights reserved. SUNBEAM® and OSTER® are registered trademarks and FRESH BREW™ is a trademark of Sunbeam Products, Inc. Imported and distributed by Sunbeam Corporation (Canada) Limited.

Rev 16/4/04

P.N. 114421

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>