

**Features and Benefits****Serial Device Server**

- Transmit serial data over an IP network
- 2 Serial Port Interfaces
- RS485/RS422/RS232 (DB9 or RJ45 connectors).
- Serial Fiber Interface (ST) option
- Support for Modbus TCP, DNP 3, TIN serial protocols
- Baud rates up to 230 kbps
- Raw socket mode allows conversion of any serial protocol
- Point-to-point and multi-point modes
- Converts Modbus RTU to Modbus; Multiple Modbus masters
- Converts DNP3.0 to DNP over UDP/TCP

**Ethernet Ports**

- Integrated fully managed Ethernet Switch
- Up to 3 Fast Ethernet Ports (copper and/or fiber)
- Supports many types of fiber (Multimode, Singlemode)
- Multiple connector types (ST, MTRJ, LC, SC)

**Cyber Security**

- Multi-level user passwords
- SSH/SSL encryption
- Enable/disable ports, MAC based port security
- Port based network access control (802.1x)
- VLAN (802.1q ) to segregate and secure network traffic
- Radius centralized password management
- SNMPv3 encrypted authentication and access security

**RuggedRated™ for Reliability in Harsh Environments**

- Immunity to EMI and heavy electrical surges
  - Meets IEEE 1613 (electric utility substations)
  - Exceeds IEC 61850-3 (electric utility substations)
  - Exceeds IEC 61800-3 (variable speed drive systems)
  - Exceeds IEC 61000-6-2 (generic industrial)
  - Exceeds NEMA TS-2 (traffic control equipment)
- -40°C to +85°C operating temperature
- no fans or moving parts for improved reliability
- 20 AWG galvanized steel enclosure
- DIN or panel mounting options

**Rugged Operating System (ROSTM) Features**

- Simple plug and play operation - automatic learning, negotiation, and crossover detection
- RSTP (802.1D-2004) and Enhanced Rapid Spanning Tree (eRSTP™) network fault recovery (<5ms)
- Quality of Service (802.1p) for real-time traffic
- VLAN (802.1q) with double tagging and GVRP support
- Link aggregation (802.3ad)
- IGMP Snooping for multicast filtering
- Port Rate Limiting and Broadcast Storm Limiting
- Port configuration, status, statistics, mirroring, security
- Loss of link management on fiber ports
- SNTP time synchronization (client and server)

**Universal Power Supply Options**

- Fully integrated power supply
- Universal high-voltage range: 88-300VDC or 85-264VAC
- Dual low-voltage DC inputs: 24VDC (9-36VDC) or 48VDC (36-72VDC)
- Terminal blocks for reliable maintenance free connections
- CSA/UL 60950 safety approved to +85°C

The RuggedServer™ RS910 is an industrially hardened serial device server with an integrated, fully managed, Ethernet switch, designed to operate reliably in electrically harsh and climatically demanding environments. The RS910 can be configured with 2 serial ports (RS485/RS422/RS232) and/or up to 3 Ethernet ports (copper or fiber). The RS910 is able to interconnect multiple types of intelligent electronic devices (IEDs) that have different methods of communications. Using the RS910 results in fewer connectivity devices (which reduces overall system costs) and also extends the useful life of existing legacy IEDs (which minimizes capital expenditure for new equipment).

The RS910 provides a high level of immunity to electromagnetic interference and heavy electrical surges typical of environments found in electric utility substations, factory floors or in curb side traffic control cabinets. The RS910 meets or exceeds a wide range of industry standards including IEC 61850, IEEE 1613, IEC 61000-6-2, IEC 61800-3, and NEMA TS-2. The RS910 also features a wide operating temperature range of -40°C to +85°C allowing it to be installed in virtually any location.

The embedded Rugged Operating System (ROS™) within the RS910 provides advanced layer 2 and layer 3 networking functions, advanced cyber security features, and a full array of intelligent functionality for high network availability and manageability. Coupled with the ruggedized hardware design, the RS910 is ideal for creating mission-critical, real-time, control applications in any harsh environment.

The RS910 is also backed by RuggedCom's all inclusive five year warranty and unsurpassed technical support.

# RuggedServer™ RS910

## Fast Ethernet Ports:

- ▶ Up to 3 Fast Ethernet Ports
- ▶ 10/100BaseTX or 100BaseFX
- ▶ Multiple fiber connector types

## Operating Temperature

- ▶ -40°C to +85°C
- ▶ No Fans

## Rugged Construction:

- ▶ 20 AWG. galvanized steel enclosure
- ▶ Conformal coating (optional)

## Serial Ports:

- ▶ 2 RS485/RS422/RS232
- ▶ DB9 or RJ45
- ▶ Up to 230kbp
- ▶ Serial Fiber Interface Option

## Critical Alarm Relay

- ▶ Form-C failsafe contact relay: 1A@30VDC

## Hazardous Location Certification

- ▶ Class1, Division2

## Integrated Power Supply

- ▶ Universal high-voltage range: 88-300VDC or 85 - 264VAC
- ▶ Popular low voltage DC ranges: 24VDC (9-36VDC), 48VDC (36-59VDC)
- ▶ Dual Isolated DC power inputs

## Mounting Options

- ▶ Din Rail
- ▶ Panel Mount



## ROS™ Features



### Serial IP Encapsulation

Many 'legacy' devices (RTU, PLC, IED, etc.) only support serial communications via RS232, RS422 or RS485. ROS™ encapsulates the serial data within a TCP connection allowing these devices to be reached via an IP network. A wide range of baud rates, frame packetization options, and diagnostics allows any serial protocol to function. The RS416 has specific support for the following serial protocols:

- Raw Socket serial encapsulation
- Modbus TCP (client and server)
- DNP 3
- WIN and TIN
- Microlok

### MODBUS TCP

The Modbus protocol is ubiquitous in the industrial control and automation world. ROS converts Modbus RTU master/slave serial data packets to Modbus TCP client/server packets for transmission over an IP network. This allows communications to Modbus RTU slaves via Ethernet and allows multiple masters to poll the same slave device.

### Cyber Security

Cyber security is an urgent issue in many industries where advanced automation and communications networks play a crucial role in mission critical applications and where high reliability is of paramount importance. Key ROS™ features that address security issues at the local area network level include:

- **Passwords** - Multi-level user passwords secures switch against unauthorized configuration
- **SSH / SSL** - Extends capability of password protection to add encryption of passwords and data as they cross the network
- **Enable / Disable Ports** - Capability to disable ports so that traffic can not pass
- **802.1q VLAN** - Provides the ability to logically segregate traffic between predefined ports on switches
- **MAC Based Port Security** - The ability to secure ports on a switch so only specific Devices / MAC addresses can communicate via that port
- **802.1x Port Based Network Access Control** - The ability to lock down ports on a switch so that only authorized clients can communicate via this port
- **Radius** - Provides centralized password management
- **SNMPv3** - encrypted authentication and access security

The ROS™ cyber security features are included to help address the various industry specific security standards such as NERC CIP, ISA S99, AGA 12, IEC 62443, ISO 17799:2005 and PCSRF SPP-ICS.

### Enhanced Rapid Spanning Tree Protocol (eRSTP™)

RuggedCom eRSTP allows the creation of fault-tolerant ring and mesh Ethernet networks that incorporate redundant links

that are 'pruned' to prevent loops. eRSTP yields worst-case fault recovery<sup>1</sup> of 5ms times the 'bridge diameter' and allows rings of up to 80 switches. For example, a ring of ten switches will have fault recovery times under 50ms. eRSTP implements both STP and RSTP to ensure interoperability with commercial switches unlike other proprietary 'ring' solutions.

### Quality of Service (IEEE 802.1p)

Some networking applications such as real-time control or VoIP (voice over IP) require predictable arrival times for Ethernet frames. Switches can introduce latency in times of heavy network traffic due to the internal queues that buffer frames and then transmit on a first come first serve basis. ROS™ supports 'Class of Service' in accordance with IEEE 802.1p that allows time critical traffic to jump ahead to the front of the queue thus minimizing latency and reducing jitter to allow such demanding applications to operate correctly. ROS™ allows priority classification by port, tags, MAC address, and IP type of service (TOS).

A configurable "weighted fair queuing" algorithm controls how frames are emptied from the queues.

### VLAN (IEEE 802.1q)

Virtual local area networks (VLAN) allow the segregation of a physical network into separate logical networks with independent broadcast domains. A measure of security is provided since hosts can only access other hosts on the same VLAN and traffic storms are isolated. ROS™ supports 802.1q tagged Ethernet frames and VLAN trunks. Port based classification allows legacy devices to be assigned to the correct VLAN. GVRP support is also provided to simplify the configuration of the switches on the VLAN.

### Link Aggregation (802.3ad)

The link aggregation feature provides the ability to aggregate several Ethernet ports into one logical link (port trunk) with higher bandwidth. This provides an inexpensive way to set up a high speed backbone to improve network bandwidth. This feature is also known as "port trunking", "port bundling", "port teaming", and "ethernet trunk".

### IGMP Snooping

ROS uses IGMP snooping (Internet Group Management Protocol v1&v2) to intelligently forward or filter multicast traffic streams (e.g. MPEG video) to or from hosts on the network. This reduces the load on network trunks and prevents packets from being received on hosts that are not involved. ROS™ has a very powerful implementation of IGMP snooping that:

<sup>1</sup> eRSTP fault recovery times may be approximated as follows:

For 100 Mbps, fault recovery performance is <5ms/hop

For 1,000 Mbps, fault recovery performance is <5ms/hop + 20ms



## ROS™ Features



- Can be enabled on a per VLAN basis.
- Detects and filters all multicast streams regardless of whether subscribers exist.
- Supports "router-less" operation by supporting an "active" mode.
- Restores traffic streams immediately after an RSTP topology change.

### SNMP (Simple Network Management Protocol)

SNMP provides a standardized method for network management stations the ability to interrogate devices from different vendors. SNMP versions supported by ROS™ are v1, v2c, and v3. SNMPv3 in particular provides security features (such as authentication, privacy, and access control) not present in earlier SNMP versions. ROS™ also supports numerous standard MIBs (Management Information Base) allowing for easy integration with any network management system (NMS). A feature of SNMP supported by ROS™ is the ability to generate "traps" upon system events. A NMS can record traps from multiple devices providing a powerful network troubleshooting tool. RuggedVue™ is RuggedCom's NMS that provides graphical visualization of the network and is fully integrated with all RuggedCom products.

### SCADA and Industrial Automation

ROS™ contains features that optimize network performance and simplify switch management based on the unique requirements found in SCADA and industrial automation applications. Features such as Modbus TCP management for retrieval of switch data using the ubiquitous Modbus protocol and DHCP Option 82, a Rockwell Automation ODVA requirement for IP address assignment based on the location of the end device, provide capabilities not found in typical "commercial" or "office grade" Ethernet switches.

### Port Based Network Access Control (802.1x)

ROS™ supports the IEEE 802.1x standard that defines a mechanism for port-based network access control which provides a means of authenticating and authorizing devices attached to LAN ports.

### Port Rate Limiting

ROS™ supports configurable rate limiting per port to limit unicast and multicast traffic. This can be essential to managing precious network bandwidth for service providers. It also provides edge security for denial of service (DOS) attacks.

### Broadcast Storm Filtering

Broadcast storms wreak havoc on a network and can cause attached devices to malfunction. This could be disastrous on a network with mission critical equipment. ROS™ limits this by filtering broadcast frames with a user-defined threshold.

### Port Mirroring

ROS™ can be configured to duplicate all traffic on one port to a designated mirror port. When combined with a network analyzer, this can be a powerful troubleshooting tool.

### Port Configuration and Status

ROS™ allows individual ports to be 'hard' configured for speed, duplex, auto-negotiation, flow control and more. This allows proper connection with devices that do not negotiate or have unusual settings. Detailed status of ports with alarm and SNMP trap on link problems aid greatly in system troubleshooting.

### Port Statistics and RMON (Remote Monitoring)

ROS™ provides continuously updating statistics per port that provide both ingress and egress packet and byte counters as well as detailed error figures. Also provided is full support for the RMON statistics, history, alarms, and event groups. RMON allows for very sophisticated data collection, analysis and detection of traffic patterns.

### Event Logging and Alarms

ROS™ records all significant events to a non-volatile system log allowing forensic troubleshooting. Events include link failure and recovery, unauthorized access, broadcast storm detection, and self-test diagnostics among others. Alarms provide a snapshot of recent events that have yet to be acknowledged by the network administrator. An external hardware relay is de-energized during the presence of critical alarms allowing an external controller to react if desired.

### HTML Web Browser and Telnet User Interfaces

ROS™ provides a simple, intuitive user interface for configuration and monitoring via a standard graphical web browser or via Telnet. All system parameters include detailed on-line help to make setup a breeze. ROS™, presents a common look and feel and standardized configuration process allowing easy migration to other RuggedCom managed products.

### Configuration via ASCII Text File

All configuration parameters are stored in an ASCII formatted text file that can easily be transferred via TFTP or Xmodem. The configuration file can be saved for backup purposes and easily manipulated by a text editor. The same text file can be downloaded to the switch at a later date in order to re-configure or restore a previous configuration.

### Command Line Interface (CLI)

A command line interface can be used in conjunction with remote shell to automate data retrieval, configuration updates, and firmware upgrades. A powerful SQL-like capability allows expert users the ability to selectively retrieve or manipulate any parameters the device has to offer.

# EMI and Environmental Type Tests

NEMA TS-2 Requirements			
Test	Description	Levels	Performance Criteria*
TS-2 1998, Section 2, para 2.2.7.3	Temperature: Low Temperature/Low Voltage	89.0 VAC @ -34°C	EUT Continued to function properly during and following all temperature and humidity testing
TS-2 1998, Section 2, para 2.2.7.4	Temperature: Low Temperature/High Voltage	135.0VAC @ -34°C	
TS-2 1998, Section 2, para 2.2.7.5	Temperature: High Temperature/High Voltage	135.0VAC @ + 75°C	
TS-2 1998, Section 2, para 2.2.7.6	Temperature: High Temperature/Low Voltage	89.0VAC @ + 75°C	
TS-2 1998, Section 2 para. 2.2.8.4	Vibration Endurance Test	0.5g @ 30Hz for 1hr on all three planes	EUT functioned properly following test procedure. No physical damage.
TS-2 1998, Section 2, para 2.1.10	Mechanical Shock	+/-10g half sine wave for 11msec on all three planes	EUT functioned properly following test procedure. No physical damage.
TS-2 1992, Section 2, para. 2.1.6.1	Electrical Transients: High Repetition Noise (AC Terminals)	One +/-300VDC pulse every other cycle once every 3 seconds across 360 ° of line cycle (2500W peak)	EUT functioned properly during and following test procedure. No damage
TS-2 1998, Section 2 para. 2.1.6.2	Electrical Transients: Low-Repetition High Energy (AC Terminals)	One +/-600VDC pulse every second, randomly distributed across 360 ° of line cycle. Ten pulses total.	EUT functioned properly during and following test procedure. No damage
TS-2 1998, Section 2, para 2.1.7	Electrical Transients: I/O Terminals	One +/-300VDC pulse every second, minimum 5 pulses per port	EUT functioned properly during and following test procedure. No damage
TS-2 1992, Section 2, para. 2.1.8	Electrical Transients: Nondestruct Transient Immunity (AC Terminals)	One +/-1000VDC pulse every two seconds, 3 per each polarity.	EUT functioned properly following test procedure. No damage

IEC 61000-6-2 EMC Generic Standard: Immunity for Industrial Environments					
Test	Description	Levels	RuggedCom Test Level	Performance Criteria*	
IEC 61000-4-2	ESD	Enclosure Contact	+/- 4kV	+/- 8kV	B
		Enclosure Air	+/- 8kV	+/- 15kV	B
IEC 61000-4-3	Radiated RFI	Enclosure ports	10 V/m, 80 to 1000Mhz	20V/m	A
IEC 61000-4-4	Burst (Fast Transient)	Signal ports	+/- 1kV @ 5kHz	+/- 4kV @ 2.5kHz	B
		D.C Power ports	+/- 2kV @ 5kHz	+/- 4kV	B
		A.C. Power ports	+/- 2kV @ 5kHz	+/- 4kV	B
IEC 61000-4-5	Surge	Signal ports	+/- 1kV line-to-earth	+/- 2kV line-to-earth, +/- 2kV line-to-line	B
		D.C Power ports	+/- 0.5kV line-to-earth/line	+/- 4kV line-to-earth, +/- 2kV line-to-line	B
		A.C. Power ports	+/- 2kV line-to-earth, +/- 1kV line-to-line	+/- 4kV line-to-earth, +/- 2kV line-to-line	B
IEC 61000-4-6	Induced (Conducted) RFI	Signal ports	10V @ 0, 5-80 MHz	10V @ 0, 5-80 MHz	A
		D.C Power ports	10V @ 0, 5-80 MHz	10V @ 0, 5-80 MHz	A
		A.C. Power ports	10V @ 0, 5-80 MHz	10V @ 0, 5-80 MHz	A
		Earth ground ports	10V @ 0, 5-80 MHz	10V @ 0, 5-80 MHz	A
IEC 61000-4-8	Magnetic Field	Enclosure ports	30 A/m @ 50, 60 Hz	40 A/m continuous, 1000 A/m for 1s	A
IEC 61000-4-11	Voltage Dips	A.C. Power ports	30% reduction for 0.5 period	30% for 1 period	B
			>95% reduction for 250 periods	100% for 5 periods, 100% for 50 periods	C
IEC 60255-5	Dielectric Strength	Signal ports	2kVac (Fail-Safe Relay output)	2kVac (Fail-Safe Relay output)	N/A
		D.C. Power ports	2kVac	2kVac	N/A
		A.C. Power ports	2kVac	2kVac	N/A
IEC 60255-5	H.V. Impulse	Signal ports	5kV (Fail-Safe Relay output)	5kV (Fail-Safe Relay output)	N/A
		D.C. Power ports	5kV	5kV	N/A
		A.C. Power ports	5kV	5kV	N/A

Environmental Type Tests				
Test	Description	Test Levels	Severity Levels	
IEC 60068-2-1	Cold Temperature	Test Ad	-40°C, 16 Hours	N/A
IEC 60068-2-2	Dry Heat	Test Bd	+85°C, 16 Hours	N/A
IEC 60068-2-30	Humidity (Damp Heat, Cyclic)	Test Db	95% (non-condensing), 55°C, 6 cycles	N/A
IEC 60255-21-1	Vibration	Tests Fc	2g @ (10 - 150) Hz	Class 2 1
IEC 60255-21-2	Shock	Tests Ea	30g @ 11mS	Class 2

Notes: 1. Class 2 refers to "Measuring relays and protection equipment for which a very high security margin is required or where the vibration levels are very high, (e.g. shipboard application and for severe transportation conditions)"

## Technical Specifications

### Power Supply

- Power Consumption: 10W MAX
- 24VDC: 9-36 VDC, 0.4A
- 48VDC: 36-72 VDC, 0.2A
- HI Voltage AC/DC: 88-300VDC, 85-264VAC, 0.1A

### Critical Alarm Relay

- Form-C failsafe contact relay: 1A@30VDC

### Physical

- Height: 7.4"
- Width: 2.6"
- Depth: 5.0"
- Weight: 2.7lbs
- Ingress Protection: IP40 (1mm objects)
- Enclosure: 20 AWG galvanized steel enclosure
- Mounting: DIN rail or panel mounted

### Switch Properties

- Switching method: Store & Forward
- Switching latency: 8 us (100Mbps)
- Switching bandwidth: 1.8Gbps
- MAC address table size: 16kbytes
- Priority Queues: 4
- Frame buffer memory: 1 Mbit
- VLANs: 64
- IGMP and static multicast groups: 256
- Port rate limiting: 128kbps, 256, 512, 4, 8Mbps
- No head of line blocking

### Approvals

- Hazardous Locations: Class 1, Division 2
- ISO: Designed and manufactured using a ISO9001: 2000 certified quality program
- CE Marking
- Emissions: FCC Part 15 (Class A), EN55022 (CISPR22 Class A)
- Safety: cCSAus (Compliant with CSA C22.2 No. 60950, UL 60950, EN60950)
- Laser Eye Safety (FDA/CDRH): Complies with 21 CFR Chapter1, Subchapter J.

### Warranty

- 5 Years-Applicable to design or manufacturing related product defects.

### Network Management

- ROSVue HTTP graphical web-based
- SNMP v1, v2c, v3
- Telnet, VT100
- Command Line Interface (CLI)

### IEEE Compliance

- 802.3-10BaseT
- 802.3u-100BaseTX, 100BaseFX
- 802.3x-Flow Control
- 802.3z-1000BaseLX
- 802.3ab-1000BaseTX
- 802.3ad-Link Aggregation
- 802.1D-MAC Bridges
- 802.1D-Spanning Tree Protocol
- 802.1p-Class of Service
- 802.1q-VLAN Tagging
- 802.1D-2004-Rapid Spanning Tree Protocol
- 802.1x-Port Based Network Access Control

### IETF RFC Compliance

- RFC768-UDP
- RFC783-TFTP
- RFC791-IP
- RFC792-ICMP
- RFC793-TCP
- RFC826-ARP
- RFC854-Telnet
- RFC894-IP over Ethernet
- RFC1112-IGMP v1
- RFC1519-CIDR
- RFC1541-DHCP (client)
- RFC2030-SNTP
- RFC2068-HTTP
- RFC2236-IGMP v2
- RFC2284-EAP
- RFC2475-Differentiated Services
- RFC2865-Radius
- RFC3414-SNMPv3-USM
- RFC3415-SNMPv3-VACM


### IETF SNMP MIBS

- RFC1493-BRIDGE-MIB
- RFC1907-SNMPv2-MIB
- RFC2012-TCP-MIB
- RFC2013-UDP-MIB
- RFC2578-SNMPv2-SMI
- RFC2579-SNMPv2-TC
- RFC2819-RMON-MIB
- RFC2863-IF-MIB
- draft-ietf-bridge-rstpmib-03-BRIDGE-MIB
- draft-ietf-bridge-bridgemib-smiv2-03-RSTP-MIB
- IANAifType-MIB

# Fiber Specifications and Mechanical Drawing

Fiber Optical Specifications				
Parameter	Fiber Port Type			
Mode	Multimode		Singlemode	
Connectors	MTRJ / ST / SC / LC		LC / SC / ST	
Typical Dist. (km)	2	20	50	90
Optical Wavelength (nm)	1310		1310	
Cable Size Core/Cladding (um)	50 or 62.5/125		8 or 9/125	
Tx Power (dBm)	-15.7	-15.5	-2.5	2.5
Rx Sensitivity (dBm)	-33.5	-32	-37	-39
Typical Budget (dB)	17	16.5	34.5	41.5

Longer segment lengths dependent on fiber specifications. Consult factory for further details.

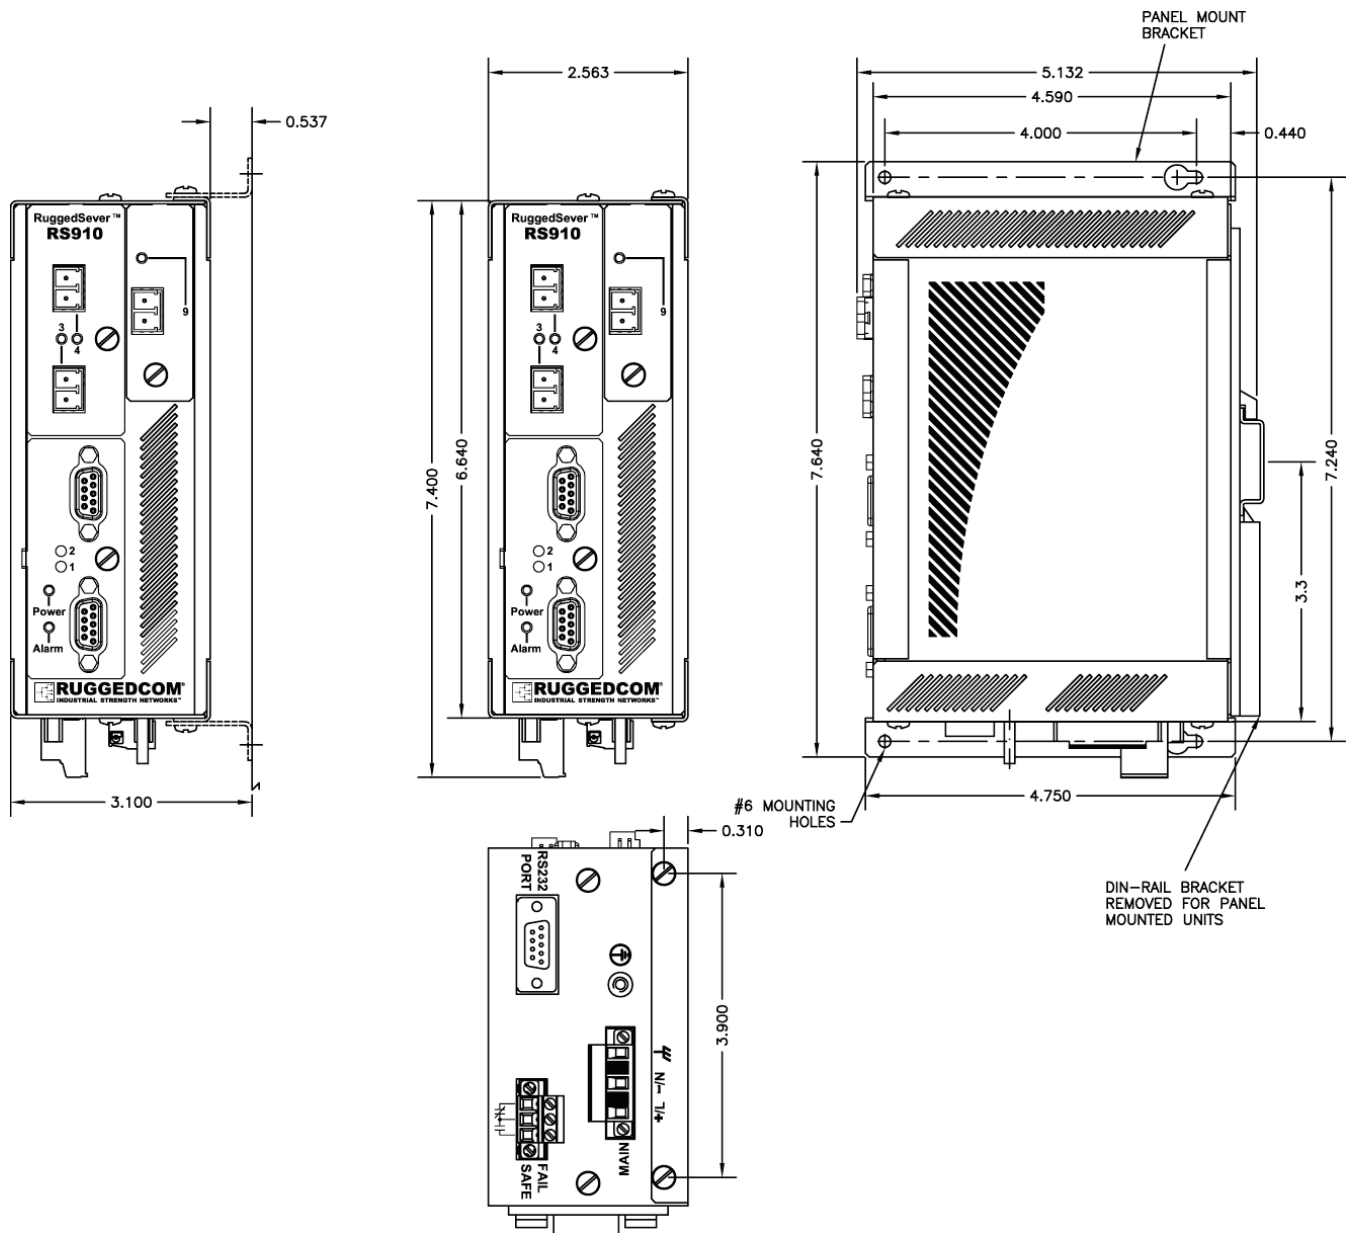

## Order Code

RS910 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
          PS      M      S      E1      E2

**PS: Power Supply**

- 24 = 24 VDC (9-36 VDC)
- 48 = 48 VDC (36-72 VDC)
- HI = 85-264VAC or 88-300VDC

**M: Mounting options**

- D = Din Rail
- P = Panel Mounting
- N = None

**S: Serial Port Options**

- XX = None
- S1 = 2 x RS232/422/485 DB9
- S2 = 2 x RS232/422/485 RJ45
- S3 = 2 x Fiber 850nm ST

**E1: Ethernet Ports Options**

- XXXX = No Ethernet ports
- TX01 = 2 x 10/100TX RJ45
- FL01 = 2 x 10FL - Multimode, 850 nm, ST connectors
- FX01 = 2 x 100FX - Multimode, 1300 nm, ST connectors
- FX02 = 2 x 100FX - Multimode, 1300 nm, SC connectors
- FX03 = 2 x 100FX - Multimode, 1300 nm, MTRJ connectors
- FX11 = 2 x 100FX - Multi mode, 1300nm, LC connectors
- FX04 = 2 x 100FX - Singlemode, 1300 nm, ST connectors, 20km
- FX05 = 2 x 100FX - Singlemode, 1300 nm, SC connectors, 20km
- FX06 = 2 x 100FX - Singlemode, 1300 nm, LC connectors, 20km
- FX07 = 2 x 100FX - Singlemode, 1300 nm, SC connectors, 50km
- FX08 = 2 x 100FX - Singlemode, 1300 nm, LC connectors, 50km
- FX09 = 2 x 100FX - Singlemode, 1300 nm, SC connectors, 90km
- FX10 = 2 x 100FX - Singlemode, 1300 nm, LC connectors, 90km

**E2: Ethernet Ports Options**

- XX = No port
- TX = 1 x 10/100BaseTX
- MJ = 1 x 100BaseFX - Multimode, MTRJ connector
- MC = 1 x 100BaseFX - Multimode, SC connector
- MT = 1 x 100BaseFX - Multimode, ST connector
- ML = 1 x 100BaseFX - Multimode, LC connector
- T2 = 1 x 100BaseFX - Multimode, ST connector, 20km
- L2 = 1 x 100BaseFX - Singlemode, LC connector, 20km
- L5 = 1 x 100BaseFX - Singlemode, LC connector, 50km
- L9 = 1 x 100BaseFX - Singlemode, LC connector, 90km
- C2 = 1 x 100BaseFX - Singlemode, SC connector, 20km
- C5 = 1 x 100BaseFX - Singlemode, SC connector, 50km
- C9 = 1 x 100BaseFX - Singlemode, SC connector, 90km



RuggedCom Inc.  
30 Whitmore Road  
Woodbridge, Ontario, Canada L4L 7Z4

**Tel:** (905) 856-5288 **Fax:** (905) 856-1995

**Toll Free:** (888) 264-0006

**Technical Support Center:** (866) 922-7975 or (954) 922-7975

© 2007 RuggedCom Inc.

RuggedSwitch is a trademark of RuggedCom Inc.

Ethernet is a trademark of the Xerox Corporation.

Patent Pending.

All specifications in this document are subject to change without notice.

Rev 1-D

**For additional information on our products and services,  
please visit our website at: [wwwRuggedCom.com](http://www.RuggedCom.com)**

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>