



SSA-424A

Digital Interface/System-to-System Interface

The SSA-424A Dual Digital Hybrid interfaces two Two-Wire intercom lines to two Four-Wire lines. Unlike earlier analog hybrids, the SSA-424A features advanced digital signal processing to achieve automatic nulling of the Two-Wire lines. Plus, each hybrid features convenient peak-reading level meters to quickly match the levels between the lines that are being interfaced. The result is easy and accurate setup. With the SSA-424A, all need for test tones, nulling adjustments and ducking adjustments have been eliminated.

Compatible Two-Wire intercom systems include RTS TW, Telex Audiocom, and Clear-Com. Compatible with Four-Wire intercom systems. An internal call signal option board is also available for the SSA-424A. This option board provides call signal compatibility with any of the two-wire systems listed above. The output can also be directly connected to an ADAM, ADAM-CS, CRONUS, or ZEUS GPI port. No external circuitry is required. With features like digital signal processing, peak-reading level meters and optional call signal interfacing, the SSA-424A Dual Digital Hybrid assures ease of setup and maximum transparency between intercom systems.

Features

Two Independent Hybrids

Automatic Nulling

Peak Reading Level Meters

Direct ADAM/ZEUS Audio Connection



Transformer Isolated

Call Signal Option

Half-Rack Wide, 1 RU High

Universal Power Pack

Line Drawing

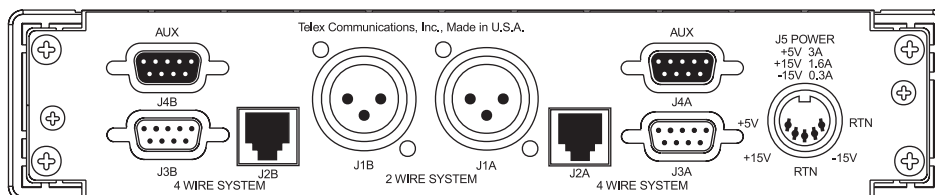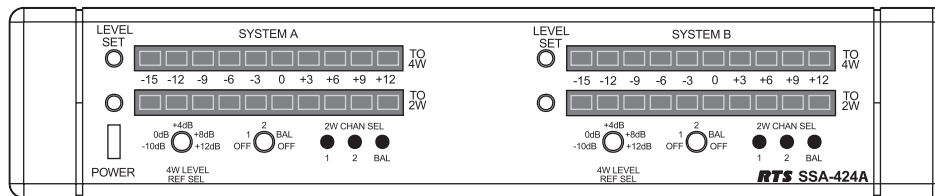

SSA-424A Specifications

2-Wire Ports

Input/Output Impedance: 5,000 Ω , nominal
Operating Level: -10dBu to 0dBu, nominal
Level Adjustment Range: \pm 12dB

4-Wire Ports

Input Impedance: 10,000 Ω , nominal
Output Impedance: 200 Ω
Operating Level: -10dBu, 0dBu, +4dBu, +8dBu, +12dBu

System to System

Frequency Response: 200Hz to 5kHz, \pm 3dB
Signal-to-Noise Ratio (Ref 1kHz, 0dB @ 2-wire): -70dB nominal
Crosstalk: -80dB nominal

Environmental

Operating Temperature: -20°C to 50°C (-4°F to 122°F)
Storage Temperature: -40°C to 85°C (-40°F to 185°F)
Humidity: 0 to 95%, non-condensing

Power

100 to 250 VAC, 50/60 Hz, 18 Watts

Dimensions

1.72" (44mm) high, 8.19" (208mm) wide, 8.0" (204mm) deep

Weight

5.0 lbs. (2.3kg)

Finish

Thermoplastic front panel, aluminum case, light gray finish

Nulling:

Automatic

Contact Information

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, Minnesota 55337
Telephone: 877-863-4169
Fax: 800-955-6831

Form Number: LIT000032000
Date: April, 2006

Ordering Information

SSA-424A

Digital Interface/System-to-System Adapter
Catalog Number: 90007824000

SSA-424A#U

Digital Interface/System-to-System Adapter
Catalog Number: 90007824001

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>