

1. Fasten mounting strip onto outlet box using 2 outlet box screws.
2. Thread 2-1/8" nipple into center hole of mounting strip about 4 complete turns. Lock in place with lock washer and hex nut. This nipple should extend long enough to protrude through the canopy when it is mounted. Adjust as necessary(see step&)
3. Guide wire through 10" nipple. Secure with hex nut. Then place decorative column, glass center column, steel ring, decorative cap, pipe, pipe lid and secure with loop.
4. Using two pliers, twist open one link at the end of chain. Hook it to the loop and close the link. Place a piece of cloth between the pliers jaws and the chain link to prevent scratching the link finish.
5. Tighten the screw collar loop to 2-1/8" nipple. Place the ring and canopy over the chain on the fixture. Using two pliers twist open the link at the other end of the chain. Connect the whole fixture to hook the screw collar loop on the ceiling and close the link.
6. Weave the fixture wires up through the chain links, through the screw collar loop and through the nipple in the mounting. Position both outlet box supply wires and the fixture wires outside of the outlet box to facilitate connection. After connection (step 7) is complete, carefully position wires back inside outlet box.
7. Connect the wires from the fixture to the power supply wires from outlet box.
 - a) Twist together white wire from the fixture with white wire from outlet box. Cover with wire connectors.
 - b) Twist together black wire from the fixture with black wire from outlet box. Cover with wire connectors.
 - c) Wrap the ground wires from the fixture and the outlet box around the green ground screw located on the mounting strip. Tighten the green ground screw to the mounting strip.
8. Place the canopy all the way to the ceiling and tight the ring onto the screw collar loop until the canopy is firmly held against the ceiling.
9. Install bulb (not included) into socket. Do not use greater than 60-watt bulb.
10. Position small glass ball, cap and secure with finial.


NOTE:Carefully remove the fixture from the carton. Check that all parts shown in package parts 1 and part 2 are included. Be carefully not to misplace any of the screws or wire connectors, which are needed for installing the fixture.

Package parts 1

Package parts 2

Description	No. ov Pieces
Chain	1
Ring	1
Canopy	1
Outlet Box screw	2
Wire Connector	2
Hex Nut	1
Screw Collar Loop	1

Description	No. ov Pieces
Finial	1
Cap	1
Hex nut	1
Nipple	1
Small Glass Ball	1

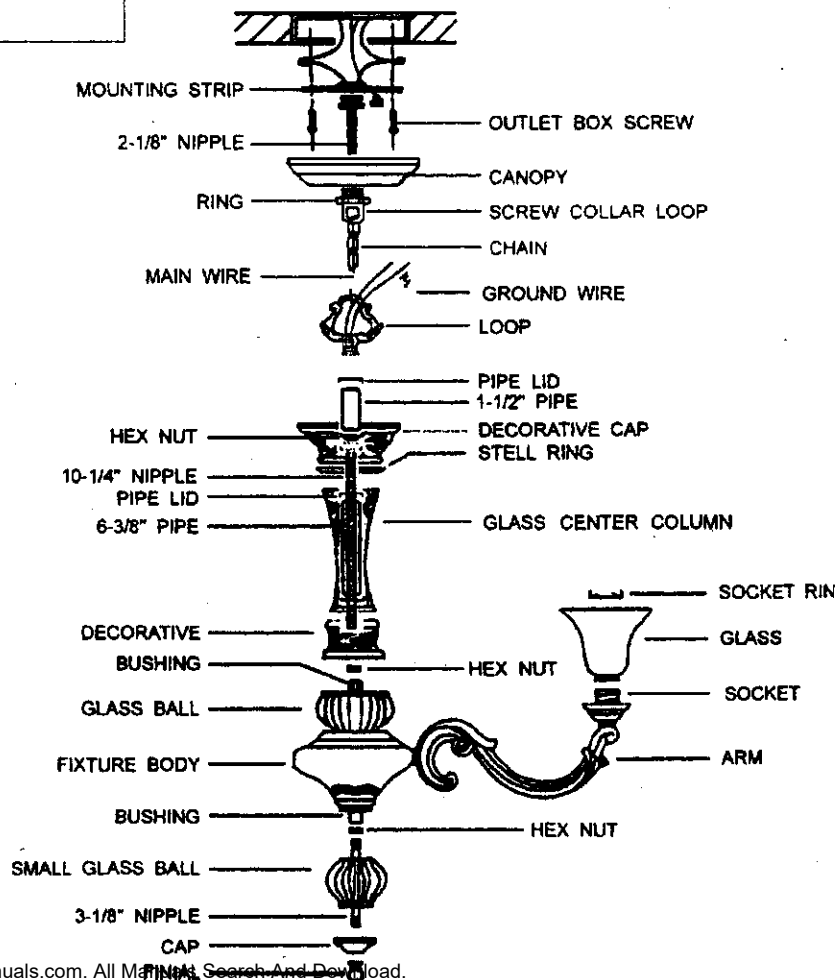

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>