




Symbol MiniScan MSXX04 Series

Integration Guide

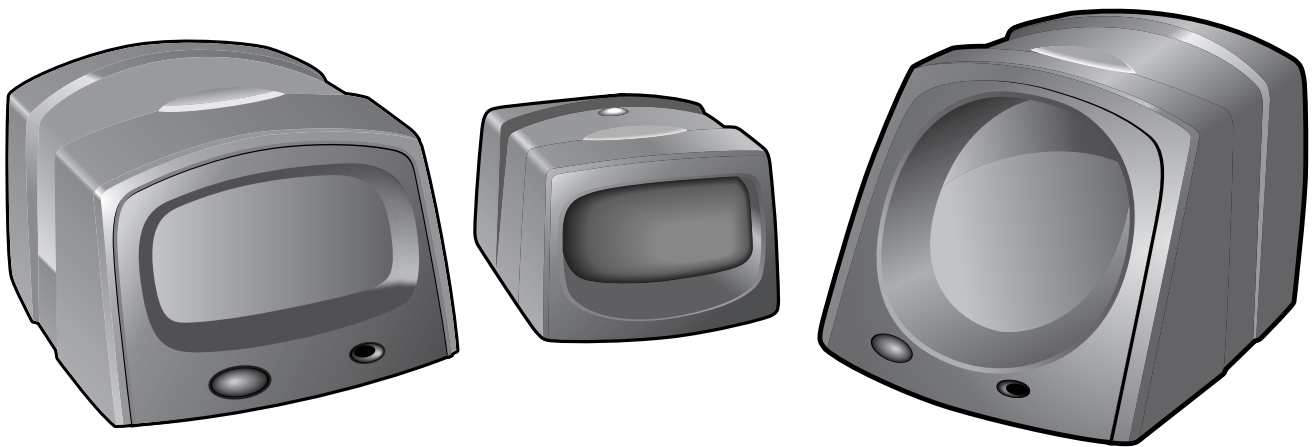

***Symbol MiniScan MSXX04 Series
Integration Guide***

72E-67134-05

Revision A

January 2008

© 2008 by Motorola, Inc. All rights reserved.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, without permission in writing from Motorola. This includes electronic or mechanical means, such as photocopying, recording, or information storage and retrieval systems. The material in this manual is subject to change without notice.

The software is provided strictly on an “as is” basis. All software, including firmware, furnished to the user is on a licensed basis. Motorola grants to the user a non-transferable and non-exclusive license to use each software or firmware program delivered hereunder (licensed program). Except as noted below, such license may not be assigned, sublicensed, or otherwise transferred by the user without prior written consent of Motorola. No right to copy a licensed program in whole or in part is granted, except as permitted under copyright law. The user shall not modify, merge, or incorporate any form or portion of a licensed program with other program material, create a derivative work from a licensed program, or use a licensed program in a network without written permission from Motorola. The user agrees to maintain Motorola’s copyright notice on the licensed programs delivered hereunder, and to include the same on any authorized copies it makes, in whole or in part. The user agrees not to decompile, disassemble, decode, or reverse engineer any licensed program delivered to the user or any portion thereof.

Motorola reserves the right to make changes to any software or product to improve reliability, function, or design.

Motorola does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any Motorola, Inc., intellectual property rights. An implied license only exists for equipment, circuits, and subsystems contained in Motorola products.

MOTOROLA and the Stylized M Logo and Symbol and the Symbol logo are registered in the US Patent & Trademark Office. Bluetooth is a registered trademark of Bluetooth SIG. Microsoft, Windows and ActiveSync are either registered trademarks or trademarks of Microsoft Corporation. All other product or service names are the property of their respective owners.

Motorola, Inc.
One Motorola Plaza
Holtsville, New York 11742-1300
<http://www.symbol.com>

Patents

This product is covered by one or more of the patents listed on the website: <http://www.symbol.com/patents>.

Warranty

For the complete Motorola hardware product warranty statement, go to: <http://www.symbol.com/warranty>.

Revision History

Changes to the original manual are listed below:

Change	Date	Description
-01 Rev A	2/2004	Initial release.
-02 Rev A	6/2004	Added Embedded Application information.
-03 Rev A	8/2006	Software updates.
-04 Rev A	3/2007	Updated service information and specifications.
-05 Rev A	1/2008	Added new UPC/EAN supplemental options and Bookland ISBN format option, updated troubleshooting.

Table of Contents

About This Guide

Introduction	xiii
Chapter Descriptions	xiii
Notational Conventions.....	xiv
Related Documents	xv
Service Information.....	xv

Chapter 1: Getting Started

Introduction	1-1
Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Features	1-2
Symbol MS954 Features	1-2
Typical Applications	1-3
Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Applications	1-3
Symbol MS954 Applications	1-3
Block Diagrams	1-3
Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Block Diagram	1-4
Symbol MS954 Block Diagram	1-4
Miniscan Block Diagram Descriptions	1-5

Chapter 2: Installation

Introduction	2-1
Unpacking	2-1
Mounting	2-2
Symbol MS1204FZY/MS2204/MS2204VHD Mounting Dimensions	2-2
Symbol MS3204 Mounting Dimensions	2-3
Symbol MS954 Mounting Dimensions	2-3
Mounting the Scanner on the Stand	2-4
Mounting the Scanner on the Mounting Bracket	2-5
Connecting the MiniScan	2-7
Location and Positioning	2-8
Using the MiniScan as an Embedded Scanner	2-8
Conveyor Applications	2-11

Embedded Applications Requiring a Window	2-12
Accessories	2-16
Software Developer's CD	2-17

Chapter 3: Scanning

Introduction	3-1
MiniScan Scan Patterns	3-1
Symbol MS1204FZY / MS954 Scan Pattern	3-1
Symbol MS2204 and MS2204VHD Scan Patterns	3-2
Symbol MS3204 Scan Patterns	3-3
Scan Angle Selection	3-4
Selecting Scan Angle via SSI	3-4
Selecting Scan Angle via Parameter Bar Code	3-4
Operation in Blink Mode	3-4
Scanning Tips	3-5
Scan the Entire Symbol	3-5
Position at an Angle	3-5
Trigger Options	3-5
Continuous	3-5
Level Trigger	3-6
Pulse Trigger	3-6
Blink	3-6
Host Trigger	3-6
Beeper and LED Definitions	3-7

Chapter 4: Symbol MS1204FZY Specifications

Introduction	4-1
Symbol MS1204FZY Electrical Interface	4-1
Symbol MS1204FZY Mechanical Drawings	4-3
Symbol MS1204FZY Technical Specifications	4-5
Symbol MS1204FZY Decode Zone	4-7
Usable Scan Length	4-8

Chapter 5: Symbol MS2204 Specifications

Introduction	5-1
Symbol MS2204 Electrical Interface	5-1
Symbol MS2204 Mechanical Drawings	5-3
Symbol MS2204 Technical Specifications	5-5
Symbol MS2204 Decode Zones	5-8
Symbol MS2204 1D Decode Zone	5-8
Symbol MS2204 1D Decode Distances	5-9
Symbol MS2204 2D Decode Zone	5-10
Symbol MS2204 2D Decode Distances	5-11
Usable Scan Length	5-11

Chapter 6: Symbol MS2204VHD Specifications

Introduction	6-1
Symbol MS2204VHD Electrical Interface	6-1
Symbol MS2204VHD Mechanical Drawings	6-3
Symbol MS2204VHD Technical Specifications	6-5
Symbol MS2204VHD Decode Zones	6-8
Symbol MS2204VHD 1D Decode Zone	6-8
Symbol MS2204VHD 1D Decode Distances	6-9
Symbol MS2204VHD 2D Decode Zone	6-10
Symbol MS2204VHD 2D Decode Distances	6-11
Usable Scan Length	6-11

Chapter 7: Symbol MS3204 Specifications

Introduction	7-1
Symbol MS3204 Electrical Interface	7-2
Symbol MS3204 Mechanical Drawings	7-3
Symbol MS3204 Technical Specifications	7-5
Symbol MS3204 Decode Zones	7-8
Omnidirectional Decode Distances	7-8
2D Slab/Raster Decode Distances (Symbol MS3204-I000 Only)	7-10
Usable Scan Length	7-11

Chapter 8: Symbol MS954 Specifications

Introduction	8-1
Symbol MS954 Electrical Interface	8-2
Symbol MS954 Mechanical Drawings	8-3
Symbol MS954 Technical Specifications	8-5
Symbol MS954 Decode Zone	8-7
Usable Scan Length	8-8

Chapter 9: Maintenance and Troubleshooting

Introduction	9-1
Maintenance	9-1
Troubleshooting	9-2

Chapter 10: Parameter Menus

Introduction	10-1
Operational Parameters	10-2
Default Table	10-2
Set Default Parameter	10-8
Set Defaults - Symbol MS1204, MS1204VHD, MS3204	10-8
Set Defaults - Symbol MS954	10-9
Scanning Options	10-10
Beeper Volume	10-10
Beeper Tone	10-11
Beeper Frequency Adjustment	10-11

Laser On Time	10-12
Scan Angle	10-12
Power Mode	10-13
Trigger Modes	10-14
Scanning Mode	10-15
Aiming Mode	10-16
Programmable Raster Height And Raster Expansion Speed	10-17
Timeout Between Decodes	10-18
Beep After Good Decode	10-19
Transmit “No Read” Message	10-20
Parameter Scanning	10-21
Linear Code Type Security Level	10-22
Bi-directional Redundancy	10-24
UPC/EAN	10-25
Enable/Disable UPC-A	10-25
Enable/Disable UPC-E	10-25
Enable/Disable UPC-E1	10-26
Enable/Disable EAN-8	10-27
Enable/Disable EAN-13	10-27
Enable/Disable Bookland EAN	10-28
UPC/EAN Coupon Code	10-29
Decode UPC/EAN Supplementals	10-30
User-Programmable Supplementals	10-34
Decode UPC/EAN Supplemental Redundancy	10-34
Transmit UPC-A Check Digit	10-35
Transmit UPC-E Check Digit	10-35
Transmit UPC-E1 Check Digit	10-36
UPC-A Preamble	10-37
UPC-E Preamble	10-38
UPC-E1 Preamble	10-39
Convert UPC-E to UPC-A	10-40
Convert UPC-E1 to UPC-A	10-41
EAN Zero Extend	10-41
Bookland ISBN Format	10-42
UPC/EAN Security Level	10-43
Linear UPC/EAN Decode	10-44
UPC Half Block Stitching	10-44
Code 128	10-45
Enable/Disable Code 128	10-45
Enable/Disable UCC/EAN-128	10-45
Enable/Disable ISBT 128	10-46
Lengths for Code 128	10-46
Code 128 Decode Performance	10-47
Code 128 Decode Performance Level	10-48
Code 39	10-49
Enable/Disable Code 39	10-49
Enable/Disable Trioptic Code 39	10-49
Convert Code 39 to Code 32	10-50
Code 32 Prefix	10-51
Set Lengths for Code 39	10-52

Code 39 Check Digit Verification	10-53
Transmit Code 39 Check Digit	10-53
Enable/Disable Code 39 Full ASCII	10-54
Code 39 Decode Performance	10-55
Code 39 Decode Performance Level	10-56
Code 93	10-57
Enable/Disable Code 93	10-57
Set Lengths for Code 93	10-58
Code 11	10-59
Enable/Disable Code 11	10-59
Set Lengths for Code 11	10-60
Code 11 Check Digit Verification	10-61
Transmit Code 11 Check Digit	10-62
Interleaved 2 of 5	10-63
Enable/Disable Interleaved 2 of 5	10-63
Set Lengths for Interleaved 2 of 5	10-64
I 2 of 5 Check Digit Verification	10-65
Transmit I 2 of 5 Check Digit	10-66
Convert I 2 of 5 to EAN-13	10-66
Discrete 2 of 5	10-67
Enable/Disable Discrete 2 of 5	10-67
Set Lengths for Discrete 2 of 5	10-68
Chinese 2 of 5	10-69
Enable/Disable Chinese 2 of 5	10-69
Codabar	10-70
Enable/Disable Codabar	10-70
Set Lengths for Codabar	10-71
CLSI Editing	10-72
NOTIS Editing	10-72
MSI Plessey	10-73
Enable/Disable MSI Plessey	10-73
Set Lengths for MSI Plessey	10-74
MSI Plessey Check Digits	10-75
Transmit MSI Plessey Check Digit	10-75
MSI Plessey Check Digit Algorithm	10-76
PDF417/MicroPDF417	10-77
Enable/Disable PDF417	10-77
Enable/Disable MicroPDF417	10-77
MicroPDF Performance	10-78
Code 128 Emulation	10-79
GS1 DataBar	10-80
GS1 DataBar-14	10-80
GS1 DataBar Limited	10-80
GS1 DataBar Expanded	10-81
Convert GS1 DataBar to UPC/EAN	10-82
Composite	10-83
Composite CC-C	10-83
Composite CC-A/B	10-84
Composite TLC-39	10-84
UPC Composite Mode	10-85

Data Options	10-86
Transmit Code ID Character	10-86
Prefix/Suffix Values	10-88
Scan Data Transmission Format	10-89
Simple Serial Interface (SSI) Options	10-91
Baud Rate	10-91
Parity	10-93
Check Parity	10-94
Software Handshaking	10-95
Host RTS Line State	10-96
Decode Data Packet Format	10-97
Stop Bit Select	10-97
Intercharacter Delay	10-98
Host Serial Response Time-out	10-98
Host Character Time-out	10-98
Event Reporting	10-99
Decode Event	10-99
Boot Up Event	10-100
Parameter Event	10-100
Macro PDF Features	10-101
Transmit Symbols in Codeword Format	10-101
Transmit Unknown Codewords	10-102
Escape Characters	10-103
Delete Character Set ECIs	10-104
ECI Decoder	10-105
Transmit Macro PDF User-Selected Fields	10-106
Transmit File Name	10-106
Transmit Block Count	10-107
Transmit Time Stamp	10-107
Transmit Sender	10-108
Transmit Addressee	10-108
Transmit Checksum	10-109
Transmit File Size	10-109
Transmit Macro PDF Control Header	10-110
Last Blocker Marker	10-110
Numeric Bar Codes	10-111
Cancel	10-113

Chapter 11: Simple Serial Interface (SSI)

Introduction	11-1
Revision String	11-1
SSI Commands Not Supported	11-2

Chapter 12: Mounting Templates

Introduction	12-1
Symbol MS1204FZY/MS2204/MS2204VHD Mounting Template	12-1
Symbol MS3204 Mounting Template	12-2
Symbol MS954 Mounting Template	12-2

Appendix A: ASCII Character Sets

RS-232 ASCII Character Set	A-1
USB ASCII Character Set	A-6

Glossary**Index****Tell Us What You Think...**

About This Guide

Introduction

The Symbol MiniScan MSXX04 Series Integration Guide provides general instructions for mounting, setting up, and programming the following Symbol MiniScan models:

- MS954
- MS1204FZY
- MS2204
- MS2204VHD
- MS3204.



NOTE It is recommended that an opto-mechanical engineer perform an opto-mechanical analysis prior to integration.

Chapter Descriptions

Topics covered in this guide are as follows:

- [Chapter 1, Getting Started](#), provides an overview of the MiniScan scanners and features, and provides a block diagram of the scanner.
- [Chapter 2, Installation](#), describes how to mount and install the MiniScan scanner.
- [Chapter 3, Scanning](#), provides information on scan patterns, scanning, triggering options, and beeper and LED definitions.
- [Chapter 4, Symbol MS1204FZY Specifications](#), provides the technical and scanning specifications for the *Symbol MS1204FZY scanner*.
- [Chapter 5, Symbol MS2204 Specifications](#), provides the technical and scanning specifications for the *Symbol MS2204 scanner*.
- [Chapter 6, Symbol MS2204VHD Specifications](#), provides the technical and scanning specifications for the *Symbol MS2204VHD scanner*.

- [Chapter 7, Symbol MS3204 Specifications](#), provides the technical and scanning specifications for the *Symbol MS3204 scanner*.
- [Chapter 8, Symbol MS954 Specifications](#), provides the technical and scanning specifications for the *Symbol MS954 scanner*.
- [Chapter 9, Maintenance and Troubleshooting](#), provides information on maintaining and troubleshooting the MiniScan scanners.
- [Chapter 10, Parameter Menus](#) describes the programmable parameters, provides bar codes for programming, and hexadecimal equivalents for host download programming.
- [Chapter 11, Simple Serial Interface \(SSI\)](#) describes scanner-specific updates to the *Simple Serial Interface (SSI) Programmer's Guide*.
- [Chapter 12, Mounting Templates](#), provides mounting templates for the MiniScan scanners.
- [Appendix A, ASCII Character Sets](#), provides prefix and suffix values that can be assigned for ASCII character data transmission.

Notational Conventions

The following conventions are used in this document:

- *Italics* are used to highlight chapters and sections in this and related documents.
- bullets (•) indicate:
 - Action items
 - Lists of alternatives
 - Lists of required steps that are not necessarily sequential
- Sequential lists (e.g., those that describe step-by-step procedures) appear as numbered lists.



NOTE This symbol indicates something of special interest or importance to the reader. Failure to read the note will not result in physical harm to the reader, equipment or data.



CAUTION This symbol indicates that if this information is ignored, the possibility of data or material damage may occur.



WARNING! This symbol indicates that if this information is ignored the possibility that serious personal injury may occur.

Related Documents

The following documents provide more information for the Symbol MiniScan Series scanners.

- *MiniScan Family of Scanners Quick Reference Guide*, p/n 72-58809-xx
- *Simple Serial Interface (SSI) Programmer's Guide*, p/n 72-40451-xx
- *Simple Serial Interface (SSI) Developer's Guide*, p/n 72-50705-xx

For the latest version of this guide and all guides, go to: <http://www.symbol.com/manuals>.

Service Information

If you have a problem with your equipment, contact Motorola Enterprise Mobility Support for your region. Contact information is available at: <http://www.symbol.com/contactsupport>.

When contacting Enterprise Mobility Support, please have the following information available:

- Serial number of the unit
- Model number or product name
- Software type and version number.

Motorola responds to calls by E-mail, telephone or fax within the time limits set forth in support agreements.

If your problem cannot be solved by Motorola Enterprise Mobility Support, you may need to return your equipment for servicing and will be given specific directions. Motorola is not responsible for any damages incurred during shipment if the approved shipping container is not used. Shipping the units improperly can possibly void the warranty.

If you purchased your Enterprise Mobility business product from a Motorola business partner, contact that business partner for support.

Chapter 1 Getting Started



CAUTION Use of controls, adjustments or procedures other than those specified here can result in hazardous laser light exposure.

Introduction

The MiniScan family of fixed-mount scanners are specifically designed for stand-alone applications, and OEM applications such as kiosks.

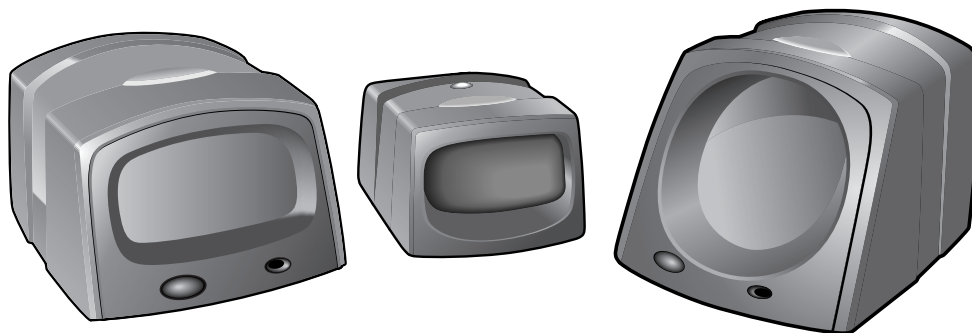


Figure 1-1 *MiniScan Family of Scanners*

Symbol MSXX04 Series scanners provide easy and flexible integration of bar code scanning into a host device, and include the following models:

- The **Symbol MS1204FZY** offers fuzzy logic for premium scanning performance on all types of 1D bar codes including poorly printed and low contrast symbols. The MS1204FZY features a compact design for superior performance and durability in a form factor that easily integrates into OEM devices for embedded applications such as medical instruments, diagnostic equipment, vending machines, and gaming. As a fixed-mount scanner, the MS1204FZY is ideal for applications requiring unattended scanning such as manufacturing, warehouse and shipping, conveyor belts, library and document tracking systems.

- The **Symbol MS2204** and **MS2204VHD** offer a "smart" raster pattern optimized for 2D applications and poorly printed 1D bar codes. The high scan rate ensures fast and reliable data on all 1D symbols, and 2D codes such as PDF417, MicroPDF, GS1 DataBar and composite codes. These scanners are perfect for automated data entry applications that require high-speed scanning, performance, and small size, such as conveyor belts, manufacturing and warehouse, gas pumps, and security/ID verification.
- The **Symbol MS3204** features a high-speed omnidirectional scan pattern that makes it easy and intuitive for consumers to scan bar codes at the point of activity. The omnidirectional scan pattern reads bar codes quickly and accurately, minimizing the need for precise positioning of linear 1D bar codes. The MS3204 provides an easy and cost-effective way to enhance existing OEM devices with high-performance 1D and 2D scanning, making it the ideal solution for applications that require fast, accurate scanning such as kiosks, ATMs, listening stations, lottery machines, and vending machines.
- **Symbol MS954** scanner is extremely compact, provides easy and flexible integration of bar code scanning into a host device, and offers high-performance scanning on 1D bar codes. The MS954 is ideal for medical instruments and kiosks.

Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Features

- Stand-alone or OEM applications
- Quick and easy integration for OEM devices
- Excellent scanning performance on all types of bar codes (MS1204FZY supports 1D bar codes only)
- Rugged IP54 sealed housing with integrated beeper
- RS-232
- Easy programming and configuration
- Flexible mounting options
- LEDs and an integrated beeper indicating scanner power status and successful decodes.

Symbol MS954 Features

- Stand-alone or OEM applications
- Quick and easy integration for OEM devices
- Excellent scanning performance on 1D bar codes
- RS-232
- Easy programming and configuration
- Flexible mounting options
- LEDs indicating scanner power status and successful decodes.

Typical Applications

Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Applications

Fixed Mount Standalone Applications

- Manufacturing / warehouse
- Conveyer belts
- Security / ID verification
- POS.

OEM Applications

- Kiosks / ATMs
- Music listening stations
- Security / ID verification
- Lottery terminals / gaming.

Symbol MS954 Applications

Fixed Mount Standalone Applications

- Clinical diagnostics
- Medical instruments
- Assembly lines.

OEM Applications

- Kiosks / ATMs
- Music listening stations
- Medical instruments
- Clinical diagnostics
- Lottery terminals / gaming.

Block Diagrams

The MiniScan block diagrams illustrate the functional relationship of the MiniScan components. A detailed description of each component in the block diagrams is also provided.

Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Block Diagram

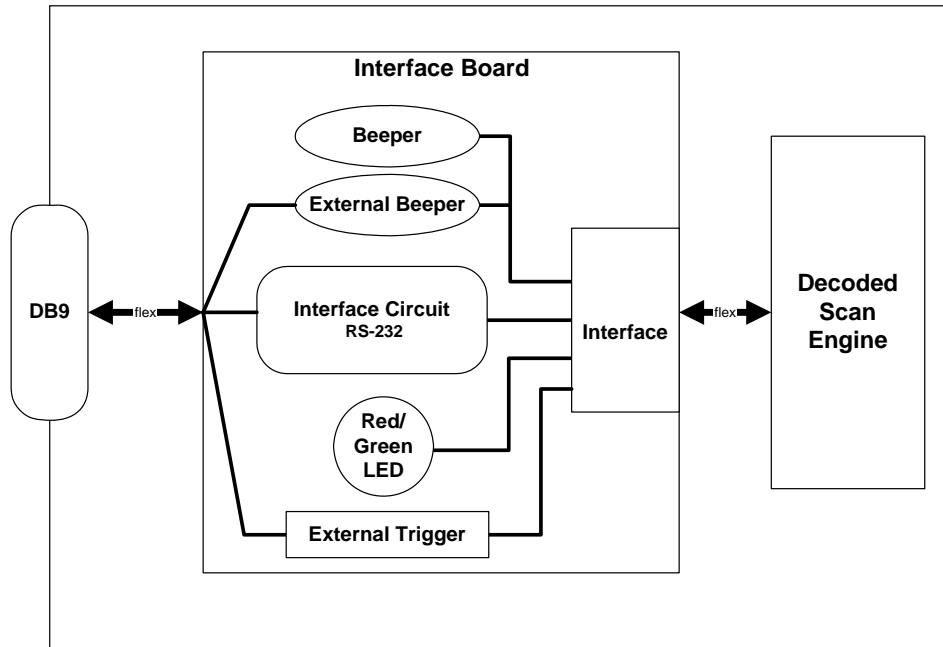


Figure 1-2 Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 Block Diagram

Symbol MS954 Block Diagram

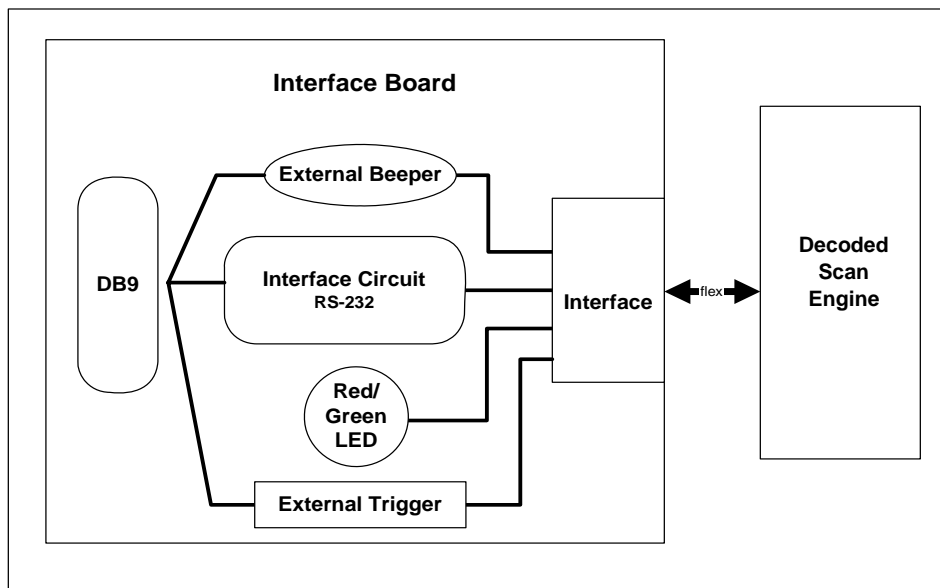


Figure 1-3 Symbol MS954 Block Diagram

Miniscan Block Diagram Descriptions

Decoded Scan Engine - The scan engine emits a beam of laser light that reflects off the bar code to be decoded. Black bars absorb light, white spaces reflect light. The scan engine collects the reflected light and processes the signal through several analog filters. The filtered signal is digitized into a Digitized Barcode Pattern (DBP). Timing information is analyzed by the decoder micro-controller to decode and transmit the data contained in the bar code. Data transmission is carried out using Motorola's proprietary SSI Interface.

Interface Board - The interface board adapts the scan engine's interface into usable signals and data for the intended host. It also contains a beeper (Symbol MS1204FZY/2204/2204VHD/3204 models only) and red/green LED for audio/visual feedback, and provides for an external trigger and external beeper.

The MiniScan interface board converts TTL level SSI signals to proper RS-232 levels for connection to any RS-232 compliant host.

DB9 - The DB9 connector provides an outlet for the various interface signals used between a MiniScan scanner and the host. It also maintains pin compatibility with the previous generation LS 1220 MiniScan host cables.

Chapter 2 Installation



Introduction

This chapter provides information on unpacking, mounting, and installing the MiniScan scanner.

Unpacking

Remove the MiniScan from its packing and inspect for damage. If the scanner is damaged, call Motorola Enterprise Mobility Support at the telephone number listed on [page xv](#).

KEEP THE PACKING. It is the approved shipping container and should be used if the equipment needs to be returned for servicing.

Mounting

There are three mounting holes (threaded inserts) on the bottom of the Symbol MS1204FZY/2204/2204VHD/3204 chassis; two mounting holes on the Symbol MS954.

The following figures provide mounting dimensions for the MiniScan scanner housings. For a mounting template, see [Chapter 12, Mounting Templates](#).

✓ **NOTE** Use only non-magnetic M3x.5 screws with a maximum length of 3.6M to mount the MiniScan scanner chassis.

Symbol MS1204FZY/MS2204/MS2204VHD Mounting Dimensions

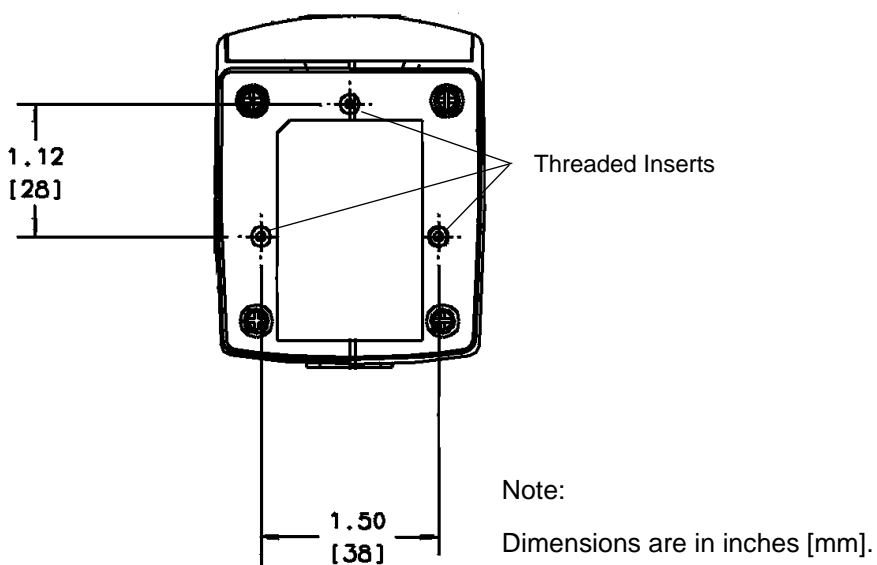


Figure 2-1 Symbol MS1204FZY/MS2204/MS2204VHD Mounting Dimensions

Symbol MS3204 Mounting Dimensions

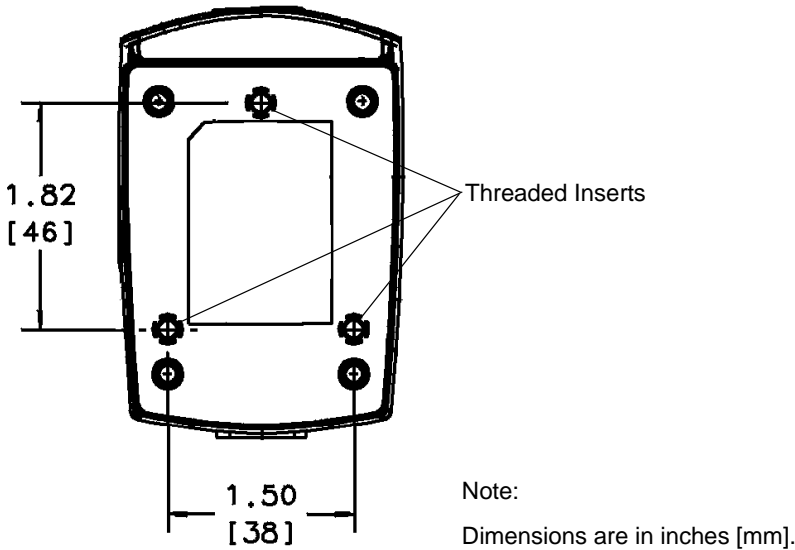


Figure 2-2 Symbol MS3204 Mounting Dimensions

Symbol MS954 Mounting Dimensions

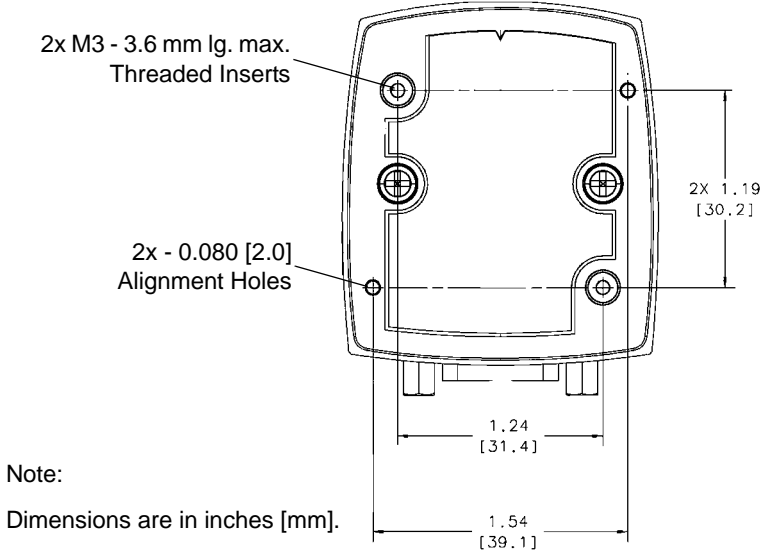


Figure 2-3 Symbol MS954 Mounting Dimensions


Mounting the Scanner on the Stand

✓ **NOTE** The stand is optional for the Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 only.

To mount the scanner on the optional stand:

1. Place the bottom of the scanner on the stand's scanner mount, aligning the scanner's center threaded insert (beneath the scan window) with the center mounting hole on the front of the stand. The two rear threaded inserts on the bottom of the scanner will align with the proper mounting holes on the stand.
2. Secure the scanner to the stand using the three screws provided with the stand.

Assembling the Stand

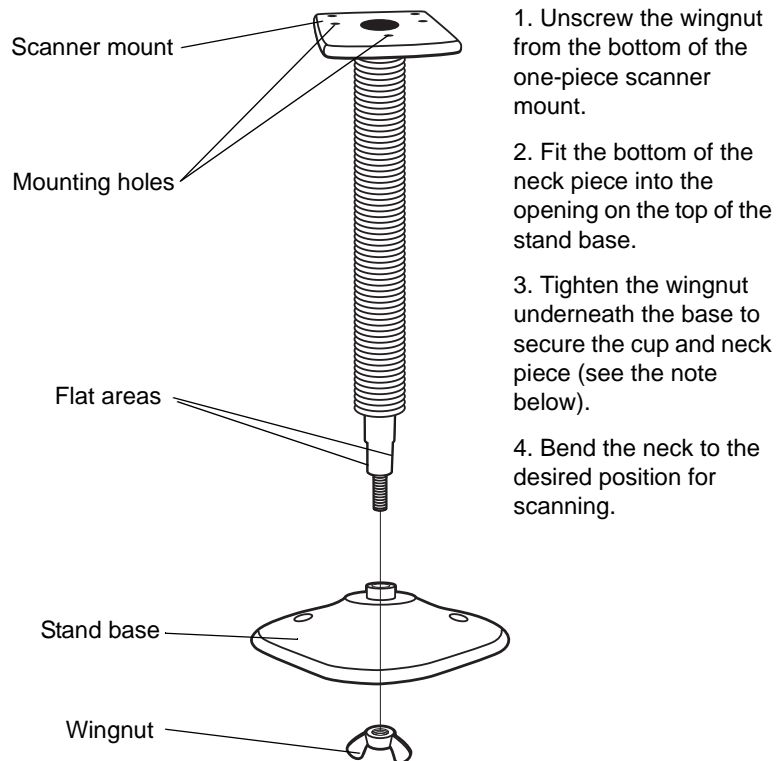

1. Unscrew the wingnut from the bottom of the one-piece scanner mount.
2. Fit the bottom of the neck piece into the opening on the top of the stand base.
3. Tighten the wingnut underneath the base to secure the cup and neck piece (see the note below).
4. Bend the neck to the desired position for scanning.

Figure 2-4 *Assembling the Stand*

✓ **NOTE** Before tightening the wingnut under the base, ensure that the flat areas on the flexible neck fit securely in the grooves in the base.

Mounting the Stand (optional)

You can attach the base of the scanner's stand to a flat surface using two screws or double-sided tape (not provided).

Screw Mount

1. Position the assembled base on a flat surface.
2. Screw one #10 wood screw into each screw-mount hole until the base of the stand is secure.

Tape Mount

1. Peel the paper liner off one side of each piece of tape and place the sticky surface over each of the three rectangular tape areas.
2. Peel the paper liner off the exposed sides of each piece of tape and press the stand on a flat surface until it is secure.

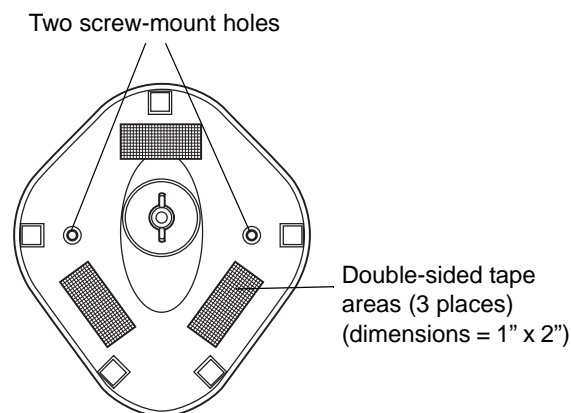


Figure 2-5 Mounting the Stand

Mounting the Scanner on the Mounting Bracket

✓ **NOTE** The mounting bracket is optional for the Symbol MS1204FZY, MS2204, MS2204VHD, and MS3204 only.

The optional mounting bracket kit consists of a scanner bracket, a mounting bracket, and the hardware required to mount the scanner. The bracket kit accommodates adjustable angles for optimal positioning of the scanner.

To mount the MiniScan scanner on the bracket, first secure the scanner to the scanner bracket, then attach the mounting bracket to the wall (see [Figure 2-6 on page 2-6](#)):

1. Tilt the scanner bracket forward to access the center scanner mounting hole on the bracket.
2. Place the bottom of the scanner on the scanner bracket, aligning the scanner's center threaded insert (beneath the scan window) with the center mounting hole on the scanner bracket.
3. Insert one of the screws provided through the mounting hole and into the scanner's center threaded insert.

For the Symbol MS1204FZY, MS2204, and MS2204VHD, use a #0 Phillips screwdriver; for the Symbol MS3204, use a #1 Phillips screwdriver.

4. Tilt the scanner bracket in the opposite direction to access the rear scanner mounting holes (which are aligned with the rear inserts on the bottom of the scanner), then insert the remaining two screws provided through the two rear mounting holes and into the scanner's threaded inserts.
5. Secure the mounting bracket to a flat surface by inserting 1/8" or smaller fasteners through the surface and into the bracket's mounting holes. There are four mounting holes on the bottom of the mounting bracket for horizontal mounting, and six holes on the side for vertical mounting.

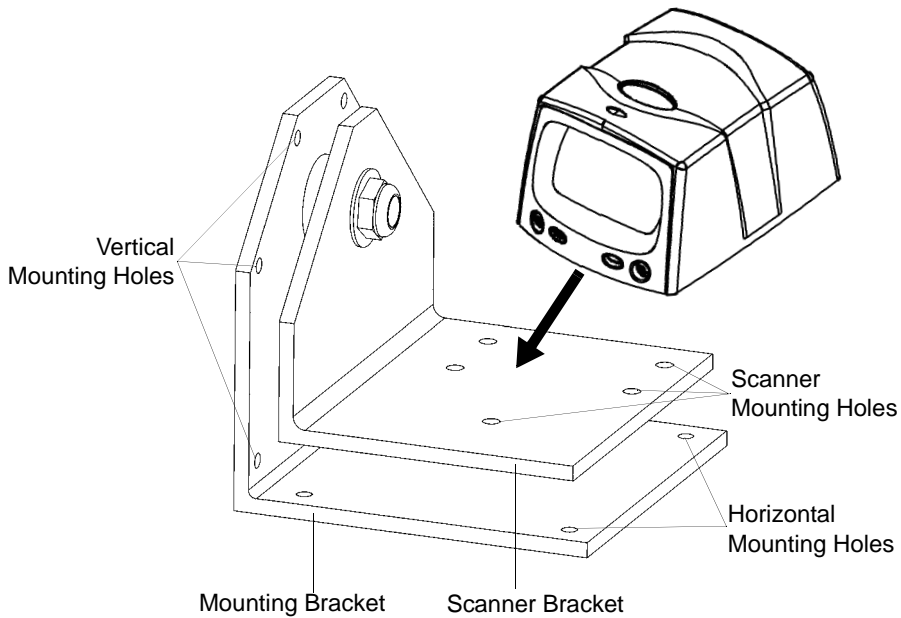


Figure 2-6 *Mounting the Scanner and Bracket*

Connecting the MiniScan

To connect the MiniScan to the host, connect the scanner cables in the order shown in [Figure 2-7](#).

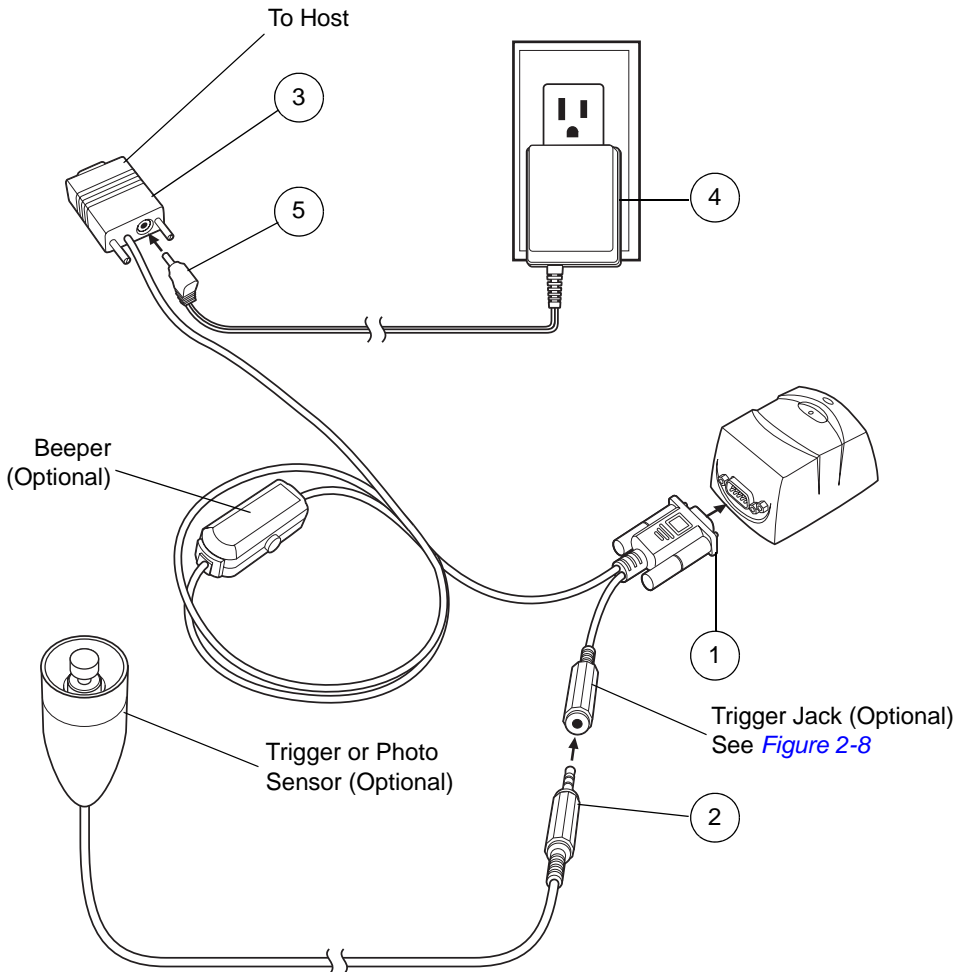


Figure 2-7 Typical Connection Diagram

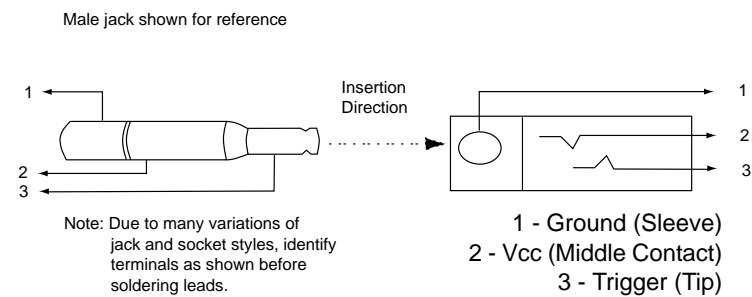


Figure 2-8 Trigger Jack Connector Pins

Location and Positioning



CAUTION The location and positioning guidelines provided do not consider unique application characteristics. It is recommended that an opto-mechanical engineer perform an opto-mechanical analysis prior to integration.



NOTE Integrate the scanner in an environment no more extreme than the product's specification, where the scanner will not exceed its temperature range. For instance, do not mount the scanner onto or next to a large heat source. When placing the scanner with another device, ensure there is proper convection or venting for heat. Follow these suggestions to ensure product longevity, warranty, and overall satisfaction with the scanner.

Using the MiniScan as an Embedded Scanner

The MiniScan can be mounted to read symbols that are automatically presented, or that are presented in a pre-determined location. In these applications, MiniScan positioning with respect to the symbol is critical. Failure to properly position the MiniScan can result in unsatisfactory scanning performance. A thermal analysis is also recommended.

Two methods of positioning the scanner are provided:

- Use the [Calculating the Usable Scan Length Method on page 2-8](#) with consistently good quality symbols (see [page 2-9](#) for the Symbol MS954). This provides a mathematical solution to find the usable scan length.
- The [Testing the Usable Scan Length Method on page 2-10](#) uses real situation testing to adjust the usable scan length to fit the application conditions.

Calculating the Usable Scan Length Method

Calculate usable scan length as follows (see [Figure 2-9 on page 2-9](#)):

$$L = 1.8 \times (D+d+B) \times \tan (A/2)$$

Table 2-1 Calculation Constants

Constants	B	A
MS1204FZY (Default)	1.17	42°
MS1204FZY (Narrow Mode)	1.17	30°
MS2204	1.53	34°
MS2204VHD	1.53	34°
MS3204	1.93	34°

where:

D = Distance (in inches) from the front edge of the host housing to the bar code.

d = The host housing's internal optical path from the edge of the housing to the front of the MiniScan scanner.

B = Internal optical path from the scan mirror to the front edge of the MiniScan scanner.

A = Scan angle in degrees.

✓ **NOTE** Usable scan length is determined by this formula, or 90% of scan line at any working distance. This formula is based on good quality symbols in the center of the working range and length of bar code.

Calculating the Usable Scan Length Method (Symbol MS954 Only)

Calculate usable scan length as follows (see [Figure 2-9 on page 2-9](#)):

$$L = 2.0 \times (D+d+B) \times \tan(A/2)$$

Table 2-2 Symbol MS954 Calculation Constants

Constants	B	A
MS954	0.87	47°
MS954 (Narrow Mode)	0.87	35°

where:

D = Distance (in inches) from the front edge of the host housing to the bar code.

d = The host housing's internal optical path from the edge of the housing to the front of the MiniScan scanner.

B = Internal optical path from the scan mirror to the front edge of the MiniScan scanner.

A = Scan angle in degrees.

✓ **NOTE** The Symbol MS954 does not require margin on either side of the bar code to decode. The 47° scan line provides identical scanning performance to older minscan devices (e.g., Symbol MS923) with a scan line of 53°.

Consider the width of the scan line at any given distance when designing a system.

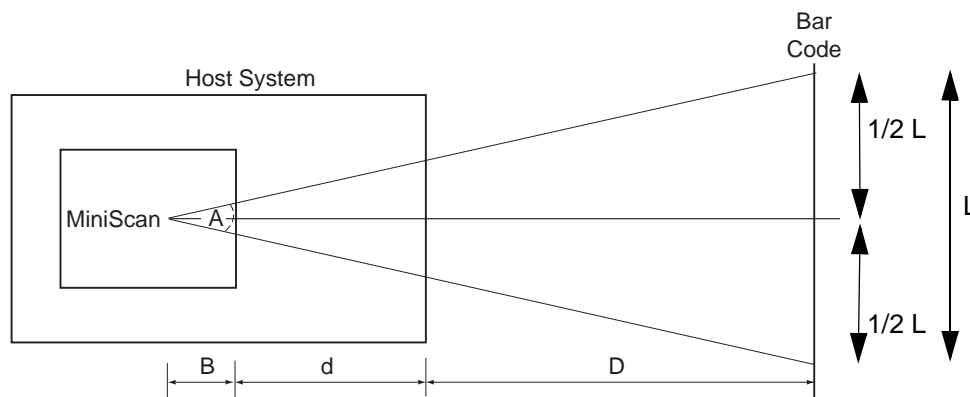


Figure 2-9 Usable Scan Length Diagram

Testing the Usable Scan Length Method

Due to the variety of symbol sizes, densities, print quality, etc., there is no simple way to calculate the ideal symbol distance. To optimize performance, use the *Testing The Usable Scan Length* positioning method:

1. Measure the maximum and minimum distances at which the symbols can be read.
2. Check the near and far range on several symbols. If they are not reasonably consistent there may be a printing quality problem that can degrade the performance of the system. Motorola can provide advice on how to improve the installation.

✓ **NOTE** Poor quality symbols (from bad printing, wear, or damage) may not decode well when placed in the center of the depth of field (especially higher density codes). The scan beam has a minimum width in the central area, and when the scanner tries to read all symbol imperfections in this area it may not decode. After a preliminary spot is determined using good quality symbols, test several reduced quality symbols and adjust the spot for the best overall symbol position.

3. Locate the scanner so the symbol is near the middle of the near/far range.
4. Center the symbol (left to right) in the scan line whenever possible.
5. Position the symbol so that the scan line is as near as possible to perpendicular to the bars and spaces in the symbol.
6. Avoid specular reflection (glare) off the symbol by tilting the top or bottom of the symbol away from the scanner. The exact angle is not critical, but it must be large enough so that if a mirror were inserted in the symbol location, the reflected scan line would miss the front surface of the scanner. For the maximum allowable angles refer to the Skew, Pitch and Roll angles listed in each MiniScan *Technical Specifications* table.
7. If an additional window is to be placed between the scanner and the symbol, determine the optimum symbol location using a representative window in the desired window position.
8. Give the scanner time to dwell on the symbol for several scans. When first enabled, the MiniScan may take two or three scans before it reaches maximum performance. Enable the MiniScan before the symbol is presented, if possible.

Conveyor Applications

Conveyor applications require setting the conveyor velocity to optimize the scanner's ability to read symbols. Also consider the orientation of the symbol with respect to the conveyor direction. [Figure 2-10 on page 2-11](#) illustrates the relationship of the conveyor velocity with respect to a symbol positioned perpendicular to the conveyor direction and [Figure 2-11 on page 2-12](#) illustrates the relationship of the conveyor velocity with respect to a symbol positioned parallel to the conveyor direction.

Symbol is Perpendicular to Conveyor Movement

With the symbol bars perpendicular to the conveyor belt direction (Picket Fence presentation) the relationship is:

$$V = (R \times (F - W)) / N$$

where: V = Velocity of the conveyor (inches/second)

R = Scan Rate (see technical specifications)

F = 80% of width of scan beam

W = Symbol Width (inches)

N = Number of scans over symbol (minimum of 10 scans)

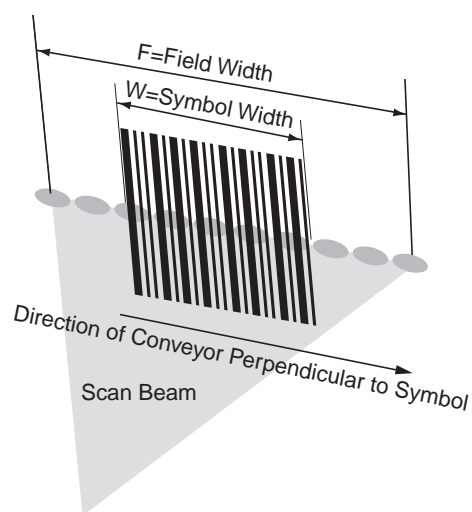


Figure 2-10 *Symbol Perpendicular To Conveyor Movement*

Example

R = 640 scans per second

F = 80% of 6 in.

W = 4 in.

N = 10

$V = (640 \times ((0.8 \times 6) - 4)) / 10 = 51.2 \text{ in./sec}$

Symbol is Parallel to Conveyor Movement

With the symbol bars parallel to the conveyor belt direction (ladder presentation) the relationship is:

$$V = (R \times H) / N$$

where: V = Velocity of the conveyor (inches/second)

R = Scan Rate of scanner (see technical specifications)

H = Symbol height

N = Number of scans over symbol (minimum of 10 scans)

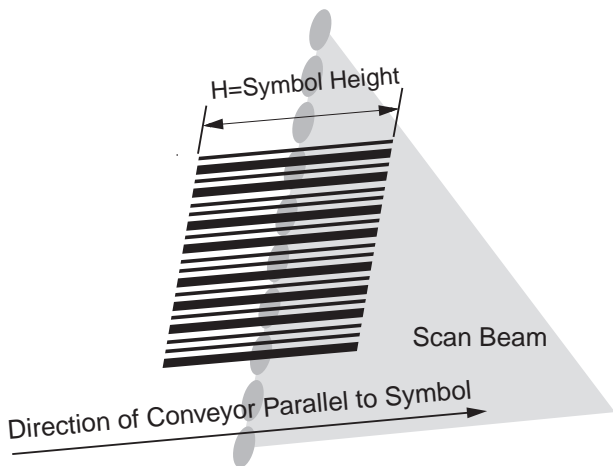


Figure 2-11 Symbol Parallel To Conveyor Movement

Example

Use the previous formula to calculate the number of scans for a specific bar code, scanner, and conveyor speed; **a minimum of 10 scans per symbol is recommended.**

$$R = 640 \text{ scans/sec}$$

$$H = 60 \text{ mil}$$

$$N = 10 \text{ scans}$$

$$V = (640 \times .060) / 10 = 3.84 \text{ in./sec}$$

Embedded Applications Requiring a Window

Use the following guidelines for applications that require a window in front of the MiniScan.

- ✓ **NOTE** Motorola does not recommend placing an exit window in front of the MiniScan; however, the following information is provided for applications that require such a window.

Window Material

Many window materials that look perfectly clear can contain stresses and distortions that can reduce scanner performance. For this reason, only optical glass or cell-cast acrylic with an anti-reflection coating is highly recommended. Following is a description of acrylic, and CR-39, another popular window material. [Table 2-3 on page 2-13](#) outlines the suggested window properties.



CAUTION Consult an opto-mechanical engineer to recommend an appropriate window material and to determine if coatings are appropriate for the specific application.



NOTE Do not use polycarbonate material.

Acrylic

When fabricated by cell-casting, acrylic has very good optical quality and low initial cost. However, protect the surface from the environment as acrylic is susceptible to attack by chemicals, mechanical stresses, and UV light. Acrylic has reasonably good impact resistance and can be ultrasonically welded.

CR-39

CR-39 is a thermal-setting plastic produced by the cell-casting process, and is commonly used in plastic eye glasses lenses. CR-39 has excellent chemical and environmental resistance, including good surface hardness. Typically it does not require hard-coating, but can be hard coated for severe environments. CR-39 has reasonably good impact resistance and cannot be ultrasonically welded.

Chemically Tempered Float Glass

Glass is a hard material which provides excellent scratch and abrasion resistance. However, unannealed glass is brittle. Increasing flexibility strength with minimal optical distortion requires chemical tempering. Glass cannot be ultrasonically welded and is difficult to cut into odd shapes.

Table 2-3 *Suggested Window Properties*

Property	Description
Material	Red cell-cast acrylic.
Spectral Transmission	85% minimum from 640 to 690 nanometers.
Thickness	0.059 ± 0.005
Wavefront Distortion (transmission)	0.2 wavelengths peak-to-valley maximum over any 0.08 in. diameter within the clear aperture.
Clear Aperture	To extend to within 0.04 in. of the edges all around.
Surface Quality	60-20 scratch/dig
Coating	Both sides to be anti-reflection coated to provide 0.5% max reflectivity (each side) from 640 to 690 nanometers at nominal window tilt angle. Coatings must comply with the hardness adherence requirements of MIL-M-13508.

Window Coatings

[Table 2-4 on page 2-14](#) lists some exit window manufacturers and anti-reflection coaters.

Anti-Reflection Coatings

Apply an anti-reflection coating to the inside and/or outside of the window to significantly reduce the amount of light reflected off the window, back into the scan engine. The coating can also improve the range of acceptable window positions and minimize performance degradation due to signal loss as the light passes through the window. Using anti-reflection coatings on both the inside and outside of the window is highly recommended.

Polysiloxane Coating

Polysiloxane type coatings are applied to plastic surfaces to improve the surface resistance to both scratch and abrasion. They are usually applied by dipping, then air-drying in an oven with filtered hot air.

Table 2-4 *Window Manufacturers and Coaters*

Company	Discipline	Specifics
Evaporated Coatings, Inc. 2365 Maryland Road Willow Grove, PA 19090 (215) 659-3080	Anti-reflection coater	Acrylic window supplier Anti-reflection coater
Fosta-Tek Optics, Inc. 320 Hamilton Street Leominster, MA 01453 (978) 534-6511	Cell-caster, hard coater, laser cutter	CR39 exit window manufacturer
Glasflex Corporation 4 Sterling Road Sterling, NJ 07980 (908) 647-4100	Cell-caster	Acrylic exit window manufacturer
Optical Polymers Int. (OPI) 110 West Main Street Milford, CT 06460 (203)-882-9093	CR-39 cell-caster, coater, laser cutter	CR39 exit window manufacturer
Polycast 70 Carlisle Place Stamford, CT 06902 800-243-9002	acrylic cell-caster, hard coater, laser cutter	Acrylic exit window manufacturer
TSP 2009 Glen Parkway Batavia, OH 45103 800-277-9778	acrylic cell-caster, coater, laser cutter	Acrylic exit window manufacturer

Embedded Window Angle and Position

If a window is placed between the MiniScan and the item to be scanned, observe the following guidelines:

- **Window Clear Opening** - Make the clear opening of the window large enough so that the entire scan beam passes through the window. Cutting off any part of the beam can result in internal reflections and degrade decode range performance. Ensure that window placement relative to the MiniScan accounts for tolerances on all parts involved in that assembly.
- **Window Angle** - Angle the window at least 2° more than the tilt of the window on the scanner (see [Table 2-5](#)). Further tilting the window is acceptable and decreases the possibility of a secondary reflection from that window degrading the scanner's performance.
- **Optical Working Range** - Adding a window can reduce the working range of the scanner since there is a signal loss when passing through window material. To minimize this reduction, use a special coating described in [Window Coatings on page 2-14](#). To understand the difference, test the scanner in the desired orientation and see if the difference affects scanner performance.

Table 2-5 Secondary Window Angles

MiniScan Model	MiniScan Exit Window Angle from Vertical	Minimum Secondary Window Angle from Vertical
MS954	28°	30°
MS1204FZY, MS2204, MS2204VHD	30°	32°
MS3204	35°	37°

Accessories

The following accessories are available for the MiniScan scanner, and can be found in Symbol's Solution Builder (ordering guide).

- For power connection
 - 110V power supply, US, p/n 50-14000-008
 - 220V power supply, Europe, p/n 50-14000-009
 - 100V power supply, Asia, p/n 50-14000-010
 - 264V Universal power supply (also order cables below), p/n 50-14001-001
 - DC line cord (power supply to scanner), p/n 50-16002-009
 - AC line cord (wall outlet to power supply), p/n 23844-00-00
- RS-232
 - Female DB9 with straight connector to RS-232 host (female DB9), with trigger jack and no beeper, p/n 25-13227-XX
 - Female DB9 with straight connector to RS-232 host (female DB9), with trigger jack and beeper, p/n 25-13228-XX
 - Female DB9 with straight connector to RS-232 host (female DB9), p/n 25-58918-XX
 - Female DB9 with right angle connector to RS-232 host (female DB9), p/n 25-58919-XX
 - Female DB9 with straight connector to RS-232 host (female DB9), with trigger jack and no hardware handshaking, p/n 25-63736-XX
- Cable Adapters
 - Female 25 pin D, TxD on pin 2, p/n 50-12100-378
 - Female 25 pin D, TxD on pin 3, p/n 50-12100-377
 - Male 25 pin D, TxD on pin 2, p/n 50-12100-380
 - Male 25 pin D, TxD on pin 3, p/n 50-12100-379
- Optional Accessories
 - Push button trigger cable, p/n 25-04950-01R
 - Photo sensor trigger cable, p/n 25-13176-01R (retroreflective, IR 850 nm, 7 foot range)
 - Fixed-mount stand, p/n 20-60136-01R
 - Mounting bracket, p/n KT-65578-01R

Simple Serial Interface Software Developer's Kit (SSISDK)

The Software Developer's Kit, available from Motorola's website, provides the software tools required to integrate and communicate with the MiniScan scanners, including:

- Sample Windows[®] program with source code
- DLL with source code for building user applications
- ActiveX component (including help file) for easy integration into VisualBasic programs
- Simple Serial Interface documentation.

With over 70 programmable parameters, MiniScan scanners can be configured by scanning bar code menus, or through the serial interface using Symbol's Simple Serial Interface protocol.

For Windows[®], DOS, and embedded system environments, this enables the user to take full advantage of the scanner's features and obtain maximum performance.

Chapter 3 Scanning



Introduction

This chapter provides information on scan patterns, scanning, triggering options, and beeper and LED definitions.

MiniScan Scan Patterns

Symbol MS1204FZY / MS954 Scan Pattern

Symbol MS1204FZY and MS954 scanners emit a single scan line to quickly decode 1D bar codes.

Figure 3-1 *Single Scan Line Scan Pattern*

Symbol MS2204 and MS2204VHD Scan Patterns

The Symbol MS2204 and MS2204VHD generate different scan patterns (Smart Raster and High Density Single Scan Line) based on the software command received at the interface. The raster pattern can be used to read 1D bar codes and PDF417 symbols.

✓ **NOTE** The Symbol MS2204 and MS2204VHD also support omnidirectional and semi-omnidirectional scan patterns, but are not optimized for these patterns.

Smart Raster Scan Pattern

The Symbol MS2204 and MS2204VHD can create a single line which opens vertically to read PDF417 symbols using the Smart Raster feature. This feature autodetects the type of bar code being scanned and adjusts its pattern accordingly, providing optimal performance on 1D, PDF417, GS1 DataBar, and Composite codes.

Stage 1: "Slab" Raster Pattern



Stage 2: Open Raster Pattern

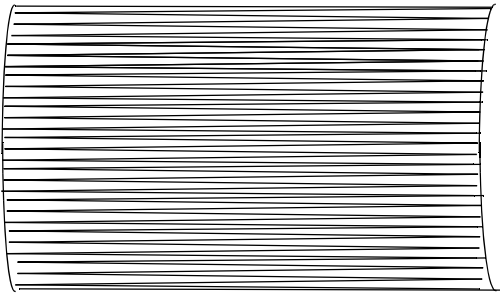


Figure 3-2 *Raster Scan Pattern*

High Density Single Scan Line Scan Pattern

The High Density single scan line appears as a "mini" raster and scans multiple areas of 1D codes to swiftly and accurately capture data on poorly printed and damaged bar codes.



Figure 3-3 *High Density Single Scan Line Scan Pattern*

Symbol MS3204 Scan Patterns

The Symbol MS3204 generates four scan patterns based on the software command received at the interface. These patterns are Smart Raster, Semi-omnidirectional, Omnidirectional, and High Density Single Scan Line. The raster pattern can be used to read 1D bar codes and PDF417 symbols. The omnidirectional pattern reads 1D bar codes in an omnidirectional manner.

Smart Raster Scan Pattern

The Symbol MS3204 can create a single line which opens vertically to read PDF417 symbols using the Smart Raster feature. This feature autodetects the type of bar code being scanned and adjusts its pattern accordingly, providing optimal performance on 1D, PDF417, GS1 DataBar, and Composite codes.

Stage 1: "Slab" Raster Pattern



Stage 2: Open Raster Pattern

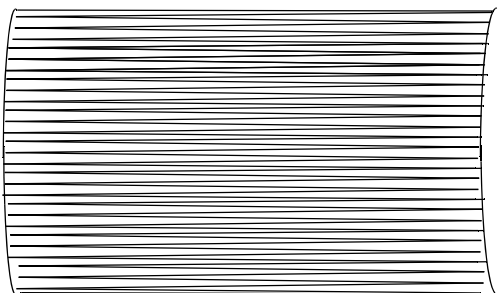


Figure 3-4 *Raster Scan Pattern*

Semi-omnidirectional Scan Pattern

The semi-omnidirectional pattern is an alternative to the full omnidirectional pattern that scans highly truncated 1D and GS1 DataBar bar codes. Present bar codes horizontally with no more than a 20° tilt.

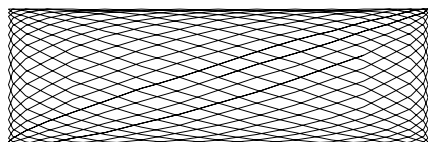


Figure 3-5 *Semi-omnidirectional Scan Pattern*

Omnidirectional Scan Pattern

The high-speed rotating omnidirectional scan pattern provides aggressive performance on 1D bar codes because there are no “holes” in the pattern. This ensures fast throughput at the point of activity and the ability to read 1D symbols in 360° of rotation, eliminating the need to orient the bar code in the field of view.

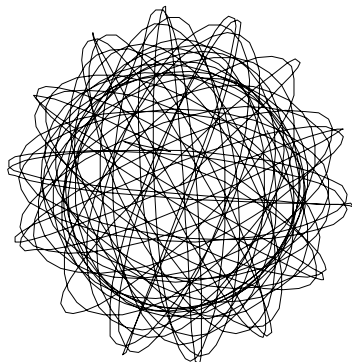


Figure 3-6 *Omnidirectional Scan Pattern*

High Density Single Scan Line Scan Pattern

The high density single scan line appears as a "mini" raster and scans multiple areas of 1D codes to swiftly and accurately capture data on poorly printed and damaged bar codes.



Figure 3-7 *High Density Single Scan Line Scan Pattern*

Scan Angle Selection

The Symbol MS1204FZY and MS954 scanners support two pre-set scan angles (see each scanner’s technical specifications).

Selecting Scan Angle via SSI

To use SSI to select the scan angle, issue the SSI PARAM_SEND command with the NUM_SCAN_ANGLE (191) parameter number. This is set to the default angle (182), or can be set to the alternate angle (181). See the *Simple Serial Interface (SSI) Programmer’s Guide* (p/n 72-40451-xx) for more information.

Selecting Scan Angle via Parameter Bar Code

The scan angle can also be set by scanning a parameter bar code (see [Scan Angle on page 10-12](#)). Once the parameter bar code is scanned, that scan angle setting is retained.

Operation in Blink Mode


The scan angle during Blink Mode is determined by the scan angle system parameter.

Scanning Tips

When scanning, make sure the symbol to be scanned is within the scanning range. See [Calculating the Usable Scan Length Method on page 2-8](#). Align the bar code with the scan beam. The green decode LED lights to indicate a successful decode.

Scan the Entire Symbol

- The scan beam must cross every bar and space on the symbol.
- The larger the symbol, the farther away the scanner should be positioned.
- Position the scanner closer for symbols with bars that are close together.

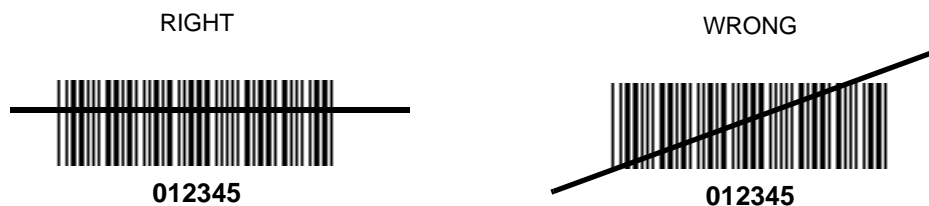

Position at an Angle

Do not position the scanner exactly perpendicular to the bar code. In this position, light can bounce back into the scanner's exit window and prevent a successful decode.

Trigger Options

Continuous

The laser is enabled continuously and decode processing is continuously active. The scanner can be configured to scan and transmit a bar code, and then not decode the same bar code or any bar code for a set period of time. See [Timeout Between Decodes on page 10-18](#) to customize the application to the rate at which bar codes are presented.



Continuous



NOTE This option is not recommended during scanner programming via bar code menus.

Level Trigger

The laser is enabled and decode processing begins when the trigger line is activated. Decode processing continues until a good decode occurs, the trigger is released, or the Laser On Time expires. The laser is disabled once decode processing is complete. The next decode attempt will not occur until the trigger line is released and then reactivated.



Level

Pulse Trigger

The laser is enabled and decode processing begins when the trigger line is activated. Decode processing continues regardless of the trigger line until a good decode occurs, or until the Laser On Time expires. The laser is disabled once decode processing is complete. The next decode attempt will not occur until the trigger line is released and then reactivated.



Pulse

Blink

✓ **NOTE** This option is supported by the Symbol MS1204FZY and MS954 only.


The laser blinks at a 25% duty cycle (reduced to 10% after 30 seconds of inactivity), until a bar code is presented. When a bar code is presented, the laser remains on until either the bar code is decoded or removed, or the session timeout expires. Once the bar code is decoded, the scanner will not decode it again until the bar code is removed.



Blink

Host Trigger

The laser is enabled and decode processing begins in response to an SSI Start Decode message from the host. Decode processing continues until a good decode occurs, an SSI Stop Decode message is received, or the Laser On Time expires. The laser is disabled once decode processing is complete. The next decode attempt will not occur until the next Start Decode message is received.



Host

Beeper and LED Definitions

[Table 3-1](#) provides beeper definitions, and [Table 3-2](#) provides LED definitions.

Table 3-1 *Beeper Definitions*

Beeper Sequence	Indication
Standard Use	
1 Beep - short high tone	A bar code symbol was decoded (if decode beeper is enabled).
1 Beep - long high tone	Thermal shutdown.
3 Beeps - short high tone (MS2204/2204VHD/3204 only)	Power-on or reset. Occurs immediately after the scanner is turned on, indicating that the system software is working properly. If three beeps occur during normal operation, it is due to a reset and any work in progress is lost. If this occurs often, contact Motorola Enterprise Mobility Support.
Parameter Menu Scanning	
2 Beeps - short high tone	Correct entry scanned or correct menu sequence performed.
1 Beep - hi/lo/hi/lo tone	Successful program exit with change in the parameter setting.
2 Beeps - lo/hi tone	Input error, incorrect bar code, or <i>Cancel</i> scanned, wrong entry, incorrect bar code programming sequence; remain in program mode.
Communication	
4 Beeps - short high tone	Communication error.
4 Beeps - hi/hi/hi/lo	Receive error.
3 Beeps - lo/hi/lo	ADF transmit error.

Table 3-2 *LED Definitions*

LED	Indication
Red	Scanner is on.
Green	A bar code was successfully decoded.

Chapter 4 Symbol MS1204FZY Specifications

Introduction

This chapter provides the technical specifications for the Symbol MS1204FZY scanner.

Symbol MS1204FZY Electrical Interface

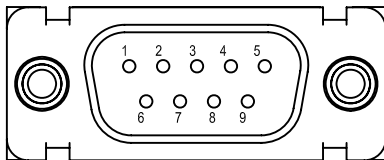


Figure 4-1 *MiniScan Connector*


Table 4-1 lists the pin functions of the Symbol MS1204FZY interface.

Table 4-1 Symbol MS1204FZY Electrical Interface

Pin No.	Pin Name	Type*	Function
1	Trigger	I	Signals scanner to begin scanning session.
2	TXD	O	Serial data transmit output. Drives the serial data receive input on the device communicating with the scanner.
3	RXD	I	Serial data receive input. Driven by the serial data transmit output on the device communicating with the scanner.
4	Not used		
5	Ground		Power supply ground input and signal ground reference.
6	Power	I	5.0 VDC \pm 10%
7	CTS	I	Clear-to-send handshaking input line, used only in conjunction with the RTS line. Optionally used by another device to signal the scanner to begin transmitting data.
8	RTS	O	Request-to-send handshaking output line, used only in conjunction with the CTS line. Optionally used by the scanner to signal another device that data is available to send.
9	Beeper/Download	I/O	During normal operation this signal functions as an external beeper drive line. This signal can sink 50 mA of current to drive an external beeper, and is normally pulled up. This signal is also used to begin Flash Download operation when grounded externally during power up.

***I = Input O = Output**

Symbol MS1204FZY Mechanical Drawings

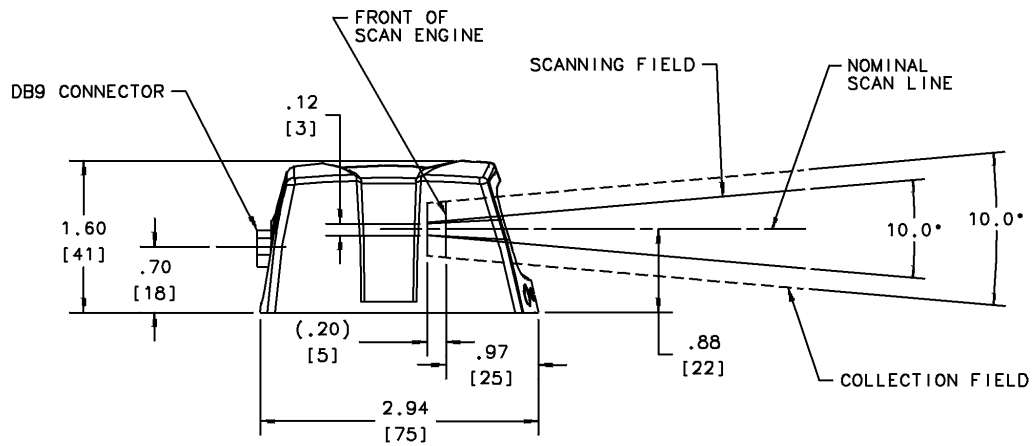

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.


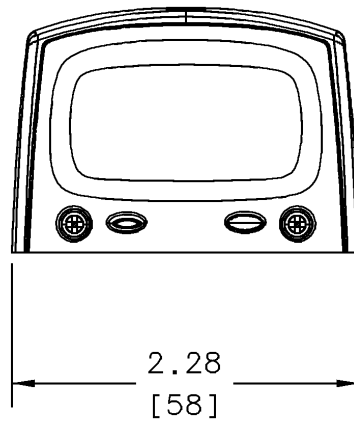


Figure 4-2 Symbol MS1204FZY Mechanical Drawing

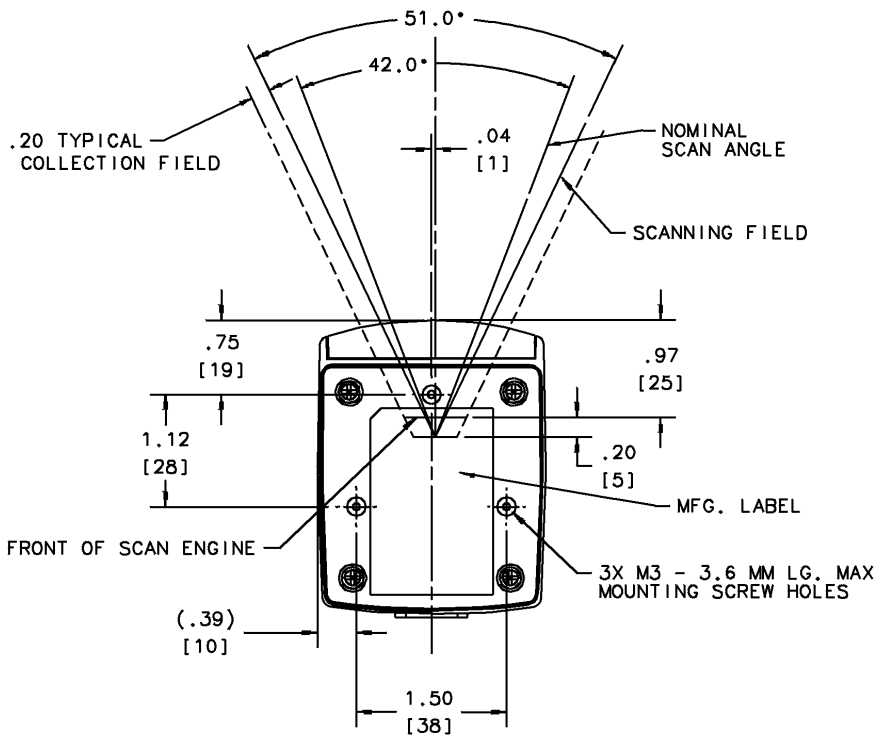

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.

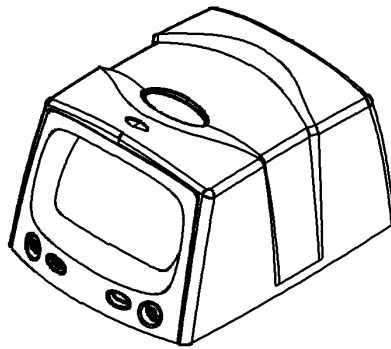


Figure 4-3 Symbol MS1204FZY Mechanical Drawing

Symbol MS1204FZY Technical Specifications

Table 4-2 provides the Symbol MS1204FZY technical specifications.

Table 4-2 Symbol MS1204FZY Technical Specifications @ 23°C

Item	Description
Power Requirements	
Input Voltage	5.0 VDC \pm 10%
Scanning Current	160 mA \pm 40 mA
Standby Current	20 mA \pm 5 mA typical
V _{cc} Noise Level	200 mV peak-to-peak max.
Laser Power	1.0 mW \pm 0.12 mW, λ = 650 nm nominal
Scan Rate	36 (\pm 5) scans/sec (bidirectional)
Print Contrast	Minimum 25% absolute dark/light reflectance measured at 650 nm.
Scan Angle	Default (Wide): 42° \pm 2° Alternate (Narrow): 30° \pm 2°
Scan Pattern	Single scan line
Skew Tolerance	\pm 50° from normal (see Figure 4-4 on page 4-6)
Pitch Angle	\pm 65° from normal (see Figure 4-4 on page 4-6)
Roll	\pm 20° from vertical (see Figure 4-4 on page 4-6)
Decode Depth of Field	See Figure 4-5 on page 4-7
Ambient Light Immunity	
Sunlight	8,000 ft. candles (86,112 lux)
Artificial Light	450 ft. candles (4,844 lux)
Drop	Multiple 30" drops
Vibration	Unpowered scanner withstands a random vibration along each of the X, Y and Z axes for a period of one hour per axis, defined as follows: 20 to 80 Hz Ramp up to 0.04 G ² /Hz at the rate of 3dB/octave. 80 to 350 Hz 0.04 G ² /Hz 350 to 2000 Hz Ramp down at the rate of 3 dB/octave.
ESD	\pm 20kV air discharge \pm 8kV indirect discharge
Sealing	IP54
Operating Temperature	-4° to 122°F (-20° to 50°C)
Storage Temperature	-40° to 158°F (-40° to 70°C)
Humidity	5% to 95% non-condensing

Note: Environmental and/or tolerance parameters are not cumulative.

Table 4-2 Symbol MS1204FZY Technical Specifications @ 23°C (Continued)

Item	Description
Laser Class	CDRH Class II, IEC Class 2
Height	1.60 in. (4.06 cm)
Width	2.28 in. (5.79 cm)
Depth	2.94 in. (7.47 cm)
Weight	4.45 oz. (126 gm)

Note: Environmental and/or tolerance parameters are not cumulative.

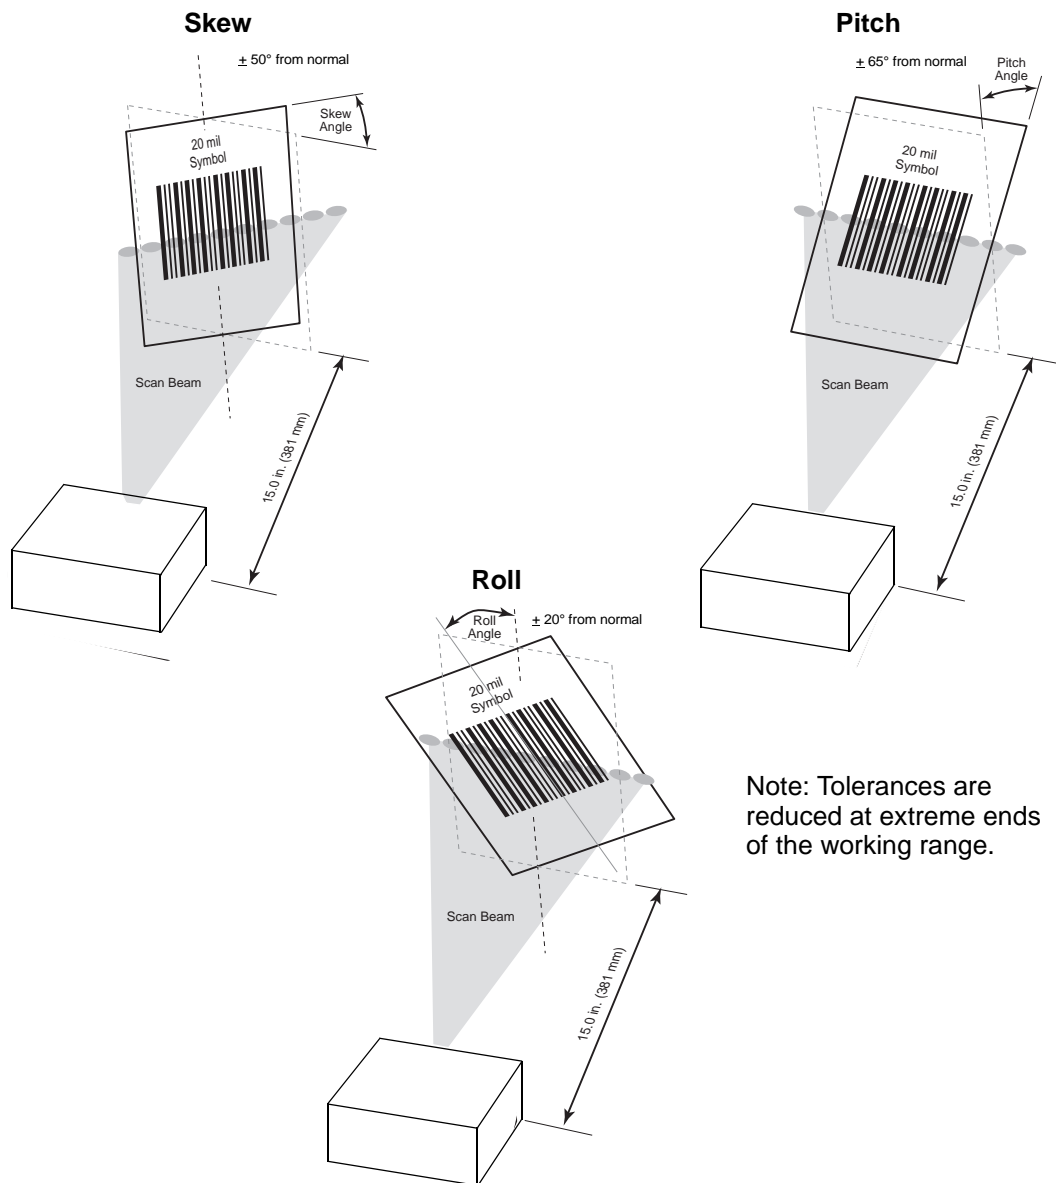


Figure 4-4 Skew, Pitch and Roll

Symbol MS1204FZY Decode Zone

The scanner has a selectable scan angle of either 30° or 42°. The 42° symbol decodes are shown in [Figure 4-5](#). The figures shown are typical values. [Table 4-3 on page 4-8](#) lists the typical and guaranteed distances for the 42° scan angle for selected bar code densities. The minimum element width (or “symbol density”) is the width in mils of the narrowest element (bar or space) in the symbol. The maximum usable length of a symbol at any given range is shown below. To calculate this distance, see [Calculating the Usable Scan Length Method on page 2-8](#).

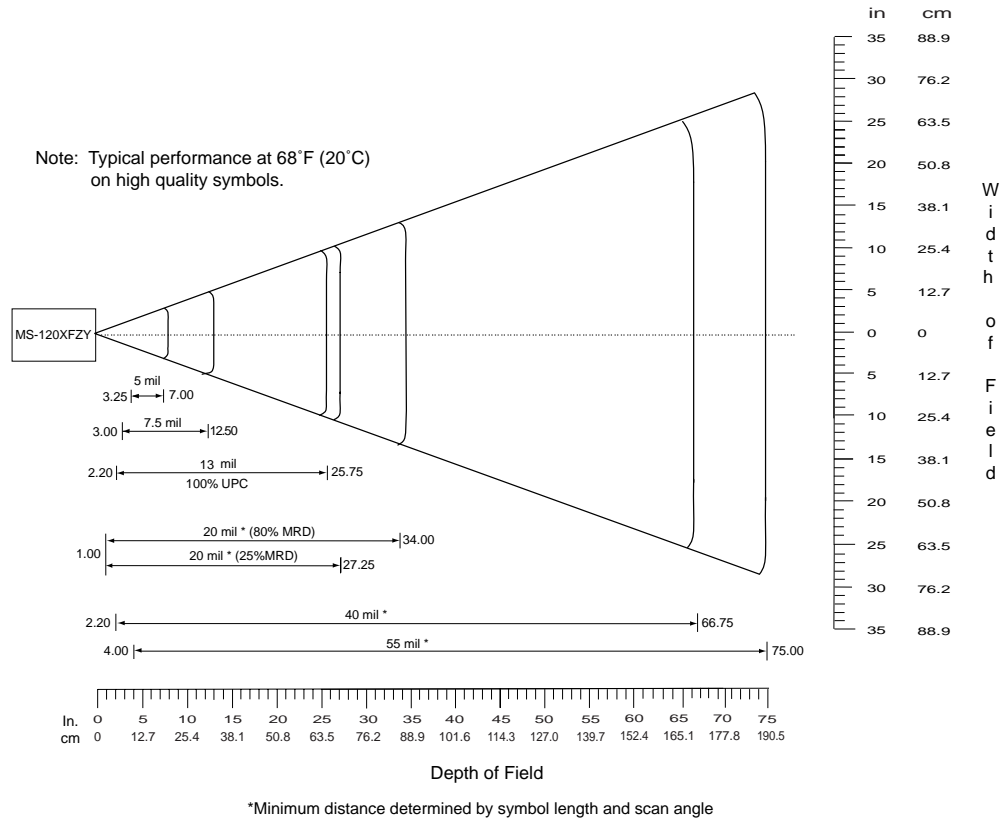


Figure 4-5 Symbol MS1204FZY Typical Decode Zone (42° Scan Angle)

Table 4-3 Symbol MS1204FZY Decode Distances (42° Scan Angle)

Symbol Density/ p/n / Bar Code Type / W-N Ratio	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
5.0 mil 64-17453-01 Code 39; 2.5:1	ABCDEFGH 80% MRD	3.25 in. 8.26 cm	7.00 in. 17.78 cm	4.75 in. 12.07 cm	5.25 in. 13.34 cm
7.5 mil 64-17452-01 Code 39; 2.5:1	ABCDEF 80% MRD	3.00 in. 7.62 cm	12.50 in. 31.75 cm	4.75 in. 12.07 cm	9.00 in. 22.86 cm
13 mil 64-05303-01 100% UPC	012345678905 80% MRD	2.20 in. 5.59 cm	25.75 in. 65.41 cm	Note 2	19.00 in. 48.26 cm
20 mil 60-01429-01 Code 39; 2.2:1	123 80% MRD	1.00 in. 2.54 cm (Note 2)	34.00 in. 86.36 cm	Note 2	24.00 in. 60.96 cm
20 mil 60-02710-01 Code 39; 2.2:1	123 25% MRD	1.00 in. 2.54 cm (Note 2)	27.25 in. 69.22 cm	Note 2	22.00 in. 55.88 cm
40 mil 64-17457-01 Code 39; 2.2:1	AB 80% MRD	2.20 in. 5.59 cm (Note 2)	66.75 in. 169.55 cm	Note 2	49.00 in. 124.46 cm
55 mil 64-17458-01 Code 39; 2.2:1	CD 80% MRD	4.00 in. 10.16 cm (Note 2)	75.00 in. 190.50 cm	Note 2	55.00 in. 139.70 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.
2. Near ranges on lower densities largely depend on the width of the bar code and the scan angle.
3. Working range specifications: Photographic quality symbols, pitch = 10°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C.

Usable Scan Length

The decode zone is a function of various symbol characteristics including density, print contrast, wide-to-narrow ratio, and edge accuracy. Consider the width of the scan line at any given distance when designing a system.

[Calculating the Usable Scan Length Method on page 2-8](#) describes how to calculate the usable scan length. The scan angle is provided in [Table 4-2 on page 4-5](#).

Chapter 5 Symbol MS2204 Specifications

Introduction

This chapter provides the technical specifications for the Symbol MS2204 scanner.

Symbol MS2204 Electrical Interface

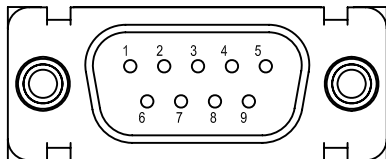


Figure 5-1 *MiniScan Connector*


Table 5-1 lists the pin functions of the Symbol MS2204 interface.

Table 5-1 Symbol MS2204 Electrical Interface

Pin No.	Pin Name	Type*	Function
1	Trigger	I	Signals scanner to begin scanning session.
2	TXD	O	Serial data transmit output. Drives the serial data receive input on the device communicating with the scanner.
3	RXD	I	Serial data receive input. Driven by the serial data transmit output on the device communicating with the scanner.
4	Not used		
5	Ground		Power supply ground input and signal ground reference.
6	Power	I	5.0 VDC \pm 10%
7	CTS	I	Clear-to-send handshaking input line, used only in conjunction with the RTS line. Optionally used by another device to signal the scanner to begin transmitting data.
8	RTS	O	Request-to-send handshaking output line, used only in conjunction with the CTS line. Optionally used by the scanner to signal another device that data is available to send.
9	Beeper/Download	I/O	During normal operation this signal functions as an external beeper drive line. This signal can sink 50mA of current to drive an external beeper, and is normally pulled up. This signal is also used to begin Flash Download operation when grounded externally during power up.

***I = Input O = Output**

Symbol MS2204 Mechanical Drawings

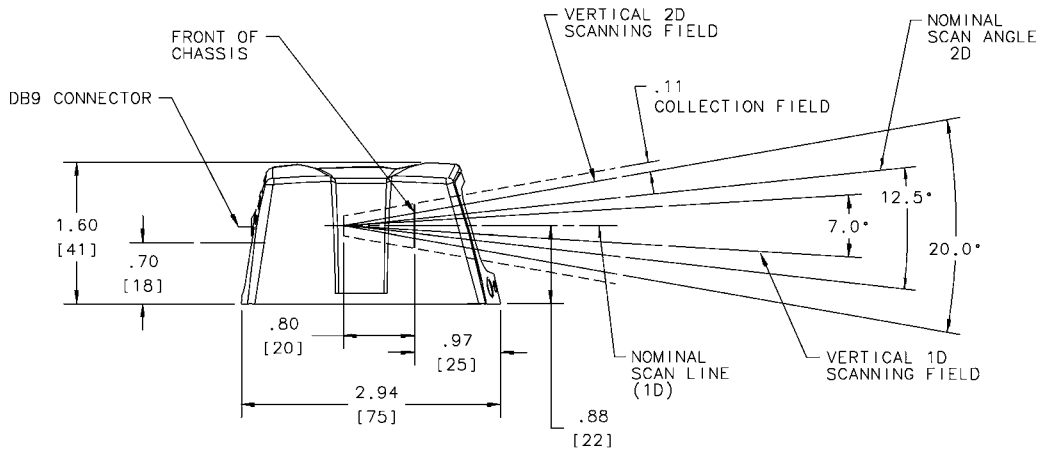

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.


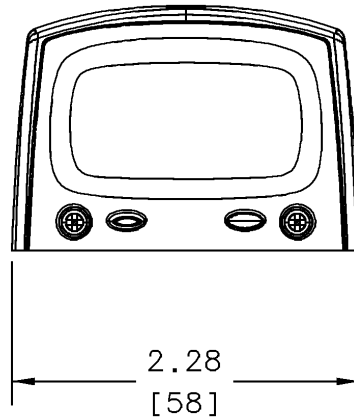


Figure 5-2 Symbol MS2204 Mechanical Drawing

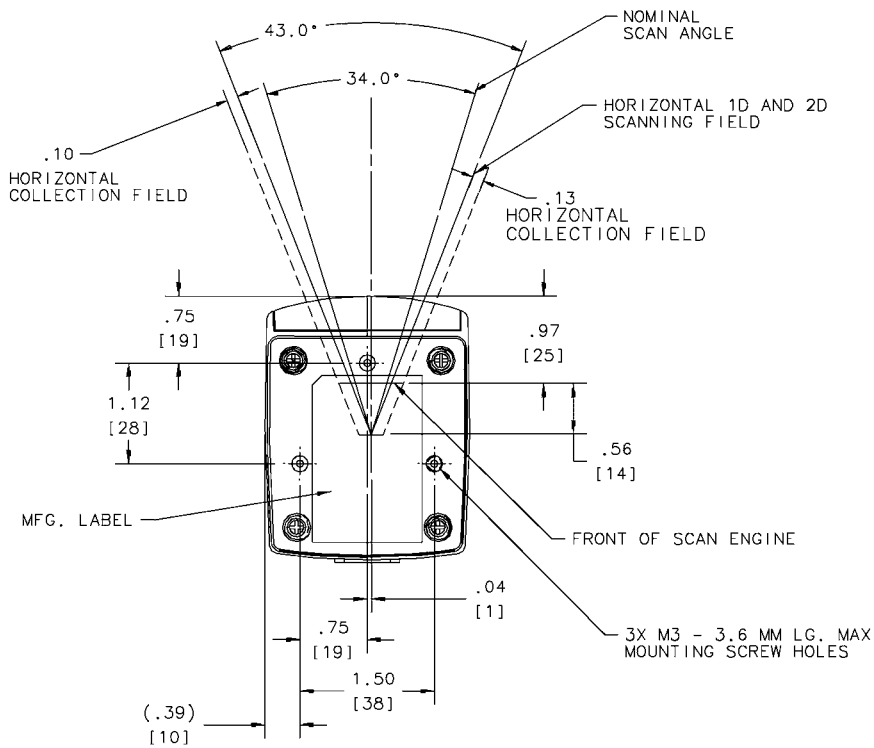

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.

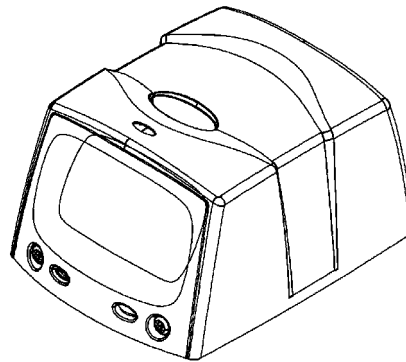


Figure 5-3 Symbol MS2204 Mechanical Drawing

Symbol MS2204 Technical Specifications

Table 5-2 provides the Symbol MS2204 technical specifications

Table 5-2 Symbol MS2204 Technical Specifications @ 23°C

Item	Description
Power Requirements	
Input Voltage	5.0 VDC \pm 10%
Scanning Current	250 \pm 30 mA typical
Standby Current	25 \pm 5 mA typical
V _{cc} Noise Level	200 mV peak-to-peak max.
Laser Power	0.95 mW \pm 0.1 mW, λ = 650 nm nominal
Scan Rate	640 scans/sec.
Scan Frequency: Horizontal	320 Hz \pm 5 Hz
Scan Frequency: Vertical	282 Hz \pm 5 Hz
Frame Rate	24 frames/sec. 12 Hz \pm 1 Hz (vertical)
Print Contrast	Minimum 35% absolute dark/light reflectance differential
Scan Angle	Horizontal: 34° \pm 1.5° Vertical: 12.5° \pm 1.5°
Scan Pattern	Smart raster, high density single scan line
Start Time	0.065 sec. to 75% of steady state horizontal amplitude
Skew Tolerance	\pm 15° from plane parallel to symbol (see Figure 5-4 on page 5-7)
Pitch Angle	\pm 30° from normal (see Figure 5-4 on page 5-7)
Roll	\pm 4° from (for scanning benchmark label, assuming 3:1 codeword aspect ratio) (see Figure 5-4 on page 5-7)
Decode Depth of Field	See Figure 5-5 on page 5-8 and Figure 5-6 on page 5-10
Beam Deviation (offset from the nominal)	Horizontal: \pm 3.0° Vertical: \pm 3.0° Horizontal tilt: \pm 2°
Ambient Light Immunity	
Sunlight	8,000 ft. candles (86,112 lux)
Artificial Light	450 ft. candles (4,844 lux)
Drop	Multiple 30" drops

Table 5-2 Symbol MS2204 Technical Specifications @ 23°C (Continued)

Item	Description
Vibration	Unpowered scanner withstands a random vibration along each of the X, Y and Z axes for a period of one hour per axis, defined as follows: 20 to 80 Hz Ramp up to 0.04 G ² /Hz at the rate of 3dB/octave. 80 to 350 Hz 0.04 G ² /Hz 350 to 2000 Hz Ramp down at the rate of 3 dB/octave.
ESD	± 20kV air discharge ± 8kV indirect discharge
Sealing	IP54
Operating Temperature	-4° to 122°F (-20° to 50°C)
Storage Temperature	-40° to 158°F (-40° to 70°C)
Humidity	5% to 95% non-condensing
Laser Class	CDRH Class II, IEC Class 2
Height	1.60 in. (4.06 cm)
Width	2.28 in. (5.79 cm)
Depth	2.94 in. (7.47 cm)
Weight	4.73 oz. (134 gm)

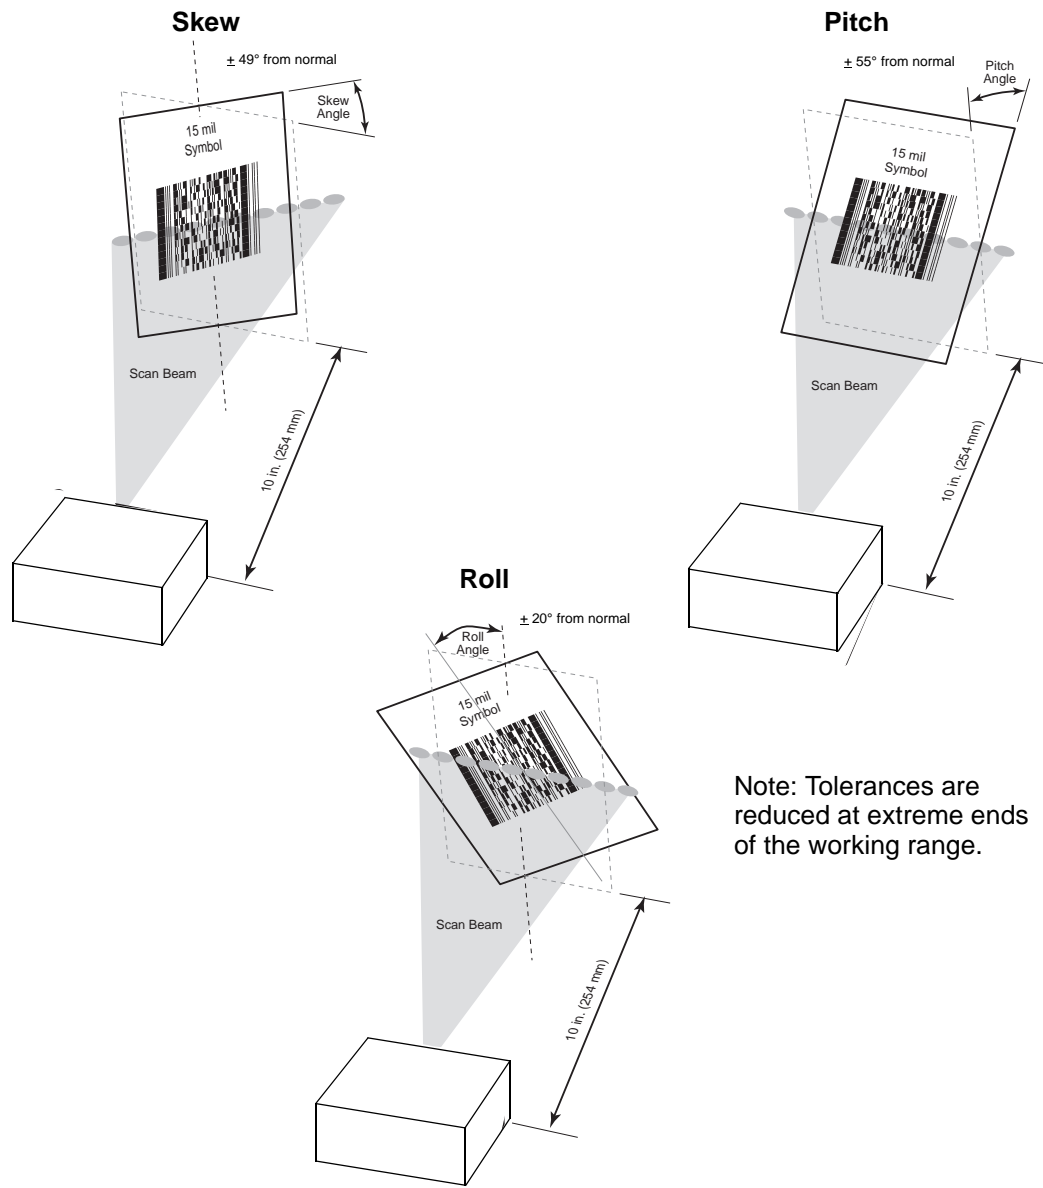



Figure 5-4 Skew, Pitch and Roll

Symbol MS2204 Decode Zones

The decode zone is a function of various symbol characteristics including density, print contrast, wide to narrow ratio and edge acurity. Typical values are shown. [Table 5-3 on page 5-9](#) and [Table 5-4 on page 5-11](#) list the typical and guaranteed distances for selected bar code densities. The minimum element width (or “symbol density”) is the width in mils of the narrowest element (bar or space) in the symbol. The maximum usable length of a symbol at any given range is shown below. To calculate this distance, see [Calculating the Usable Scan Length Methodon page 2-8](#).

Symbol MS2204 1D Decode Zone

Note: Typical performance at 68°F (20°C)
on high quality symbols in normal room light.
Vcc = 5V

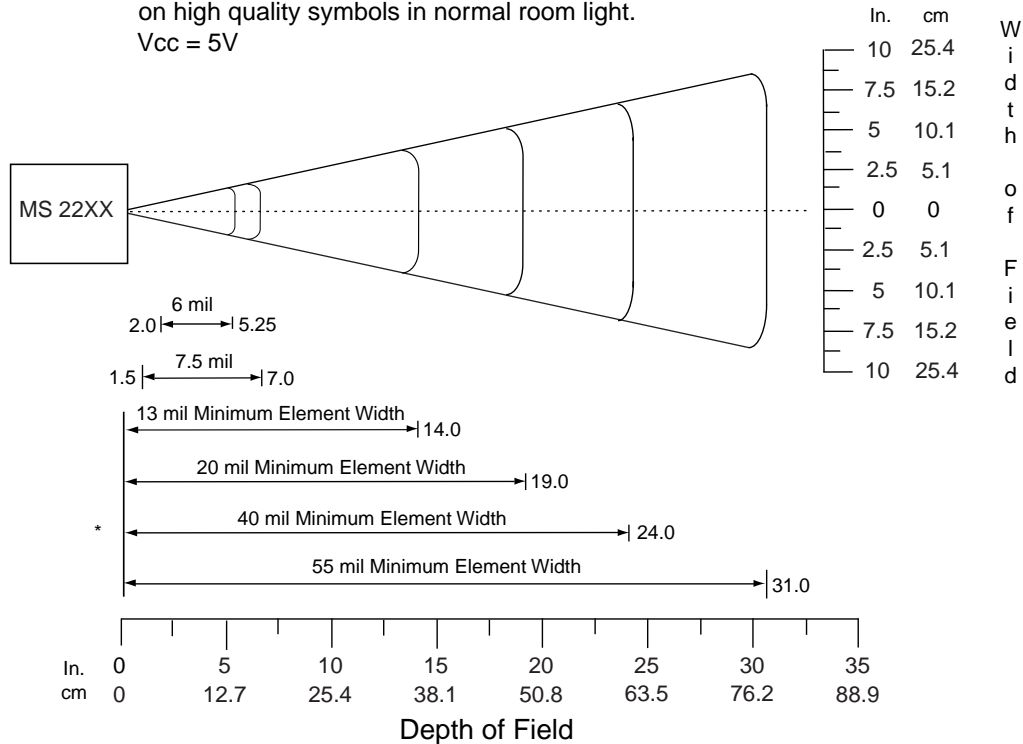

* Minimum distance determined by symbol length and scan angle.

Figure 5-5 Symbol MS2204 1D Decode Distances

Symbol MS2204 1D Decode Distances

Table 5-3 Symbol MS2204 1D Decode Distances

Symbol Density/ p/n / Bar Code Type	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
6.0 mil 60-01755-01 Code 39	123 80% MRD	2.0 in. 5.08 cm	5.25 in. 13.34 cm	2.75 in. 7.00 cm	4.0 in. 10.16 cm
7.5 mil 64-17452-01 Code 39	ABCDEF 80% MRD	1.5 in. 3.81 cm	7.0 in. 17.78 cm	2.25 in. 5.72 cm	5.0 in. 12.7 cm
13 mil 64-05303-01 100% UPC	012345678905 80% MRD	Note 2	14.0 in. 35.56 cm	N/A	10.5 in. 26.67 cm
20 mil 64-17456-01 Code 39	123 80% MRD	Note 2	19.0 in. 48.26 cm	N/A	14.0 in. 35.56 cm
40 mil 64-17457-01 Code 39	AB 80% MRD	Note 2	24.0 in. 60.96 cm	N/A	18.0 in. 45.72 cm
55 mil 60-01601-01 Code 39	A 80% MRD	Note 2	31.0 in. 78.74 cm	Note 2	25.0 in. 63.50 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.

2. Near ranges on lower densities largely depend on the width of the bar code and the scan angle.

3. Working range specifications: Photographic quality symbols, pitch = 10°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C.

Symbol MS2204 2D Decode Zone

Note: Typical performance at 68°F (20°C) on high quality symbols in normal room light. Y-module dimension = 3X.
Vcc = 5V

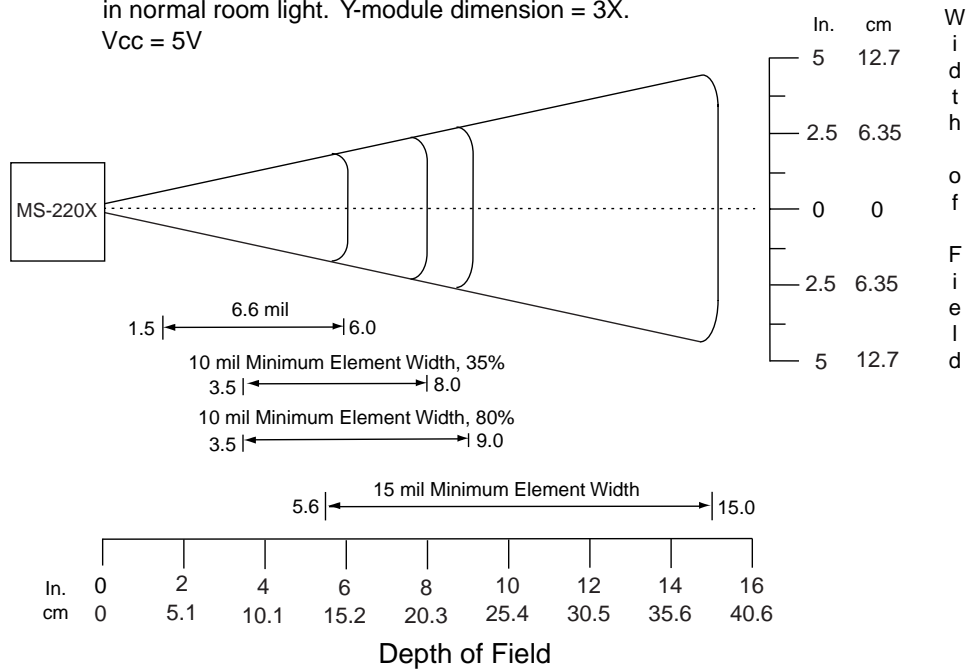


Figure 5-6 Symbol MS2204 2D Slab/Raster Decode Distances

✓ **NOTE** Not optimized for omnidirectional mode.

Symbol MS2204 2D Decode Distances

Table 5-4 Symbol MS2204 2D Slab/Raster Decode Distances

Symbol Density/ p/n / Bar Code Type	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
6.6 mil 64-14035-01 PDF417	ABCDEF 80% MRD	1.5 in. 3.81 cm	6.00 in. 15.24 cm	Note 2	4.75 in. 12.07 cm
10 mil 64-14937-01 PDF417	012345678905 35% MRD	3.5 in. 8.89 cm	8.0 in. 20.32 cm	Note 2	5.0 in. 12.7 cm
10 mil 64-14037-01 PDF417	80% MRD	3.5 in. 8.89 cm	9.0 in. 22.86 cm	Note 2	7.5 in. 19.05 cm
15 mil 64-14038-01 PDF417	80% MRD	5.6 in. 14.22 cm	15.0 in. 38.10 cm	Note 2	13.0 in. 33.02 cm

Notes:
1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.
2. Near ranges on lower densities largely depend on the width of the bar code and the scan angle.
3. Working range specifications: Photographic quality symbols, pitch = 10°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C.

✓ **NOTE** Not optimized for omnidirectional mode.

Usable Scan Length

The decode zone is a function of various symbol characteristics including density, print contrast, wide-to-narrow ratio, and edge acuity. Consider width of decode zone at any given distance when designing a system.

Calculating the Usable Scan Length Method on page 2-8 describes how to calculate the usable scan length.

Chapter 6 Symbol MS2204VHD Specifications

Introduction

This chapter provides the technical specifications for the Symbol MS2204VHD scanner.

Symbol MS2204VHD Electrical Interface

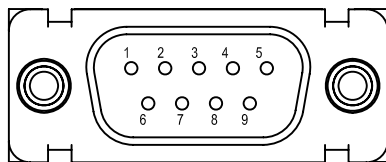


Figure 6-1 *MiniScan Connector*


Table 6-1 lists the pin functions of the Symbol MS2204VHD.

Table 6-1 Symbol MS2204VHD Electrical Interface

Pin No.	Pin Name	Type*	Function
1	Trigger	I	Signals scanner to begin scanning session.
2	TXD	O	Serial data transmit output. Drives the serial data receive input on the device communicating with the scanner.
3	RXD	I	Serial data receive input. Driven by the serial data transmit output on the device communicating with the scanner.
4	Not used		
5	Ground		Power supply ground input and signal ground reference.
6	Power	I	5.0 VDC \pm 10%
7	CTS	I	Clear-to-send handshaking input line, used only in conjunction with the RTS line. Optionally used by another device to signal the scanner to begin transmitting data.
8	RTS	O	Request-to-send handshaking output line, used only in conjunction with the CTS line. Optionally used by the scanner to signal another device that data is available to send.
9	Beeper/Download	I/O	During normal operation this signal functions as an external beeper drive line. This signal can sink 50mA of current to drive an external beeper, and is normally pulled up. This signal is also used to begin Flash Download operation when grounded externally during power up.

***I = Input O = Output**

Symbol MS2204VHD Mechanical Drawings

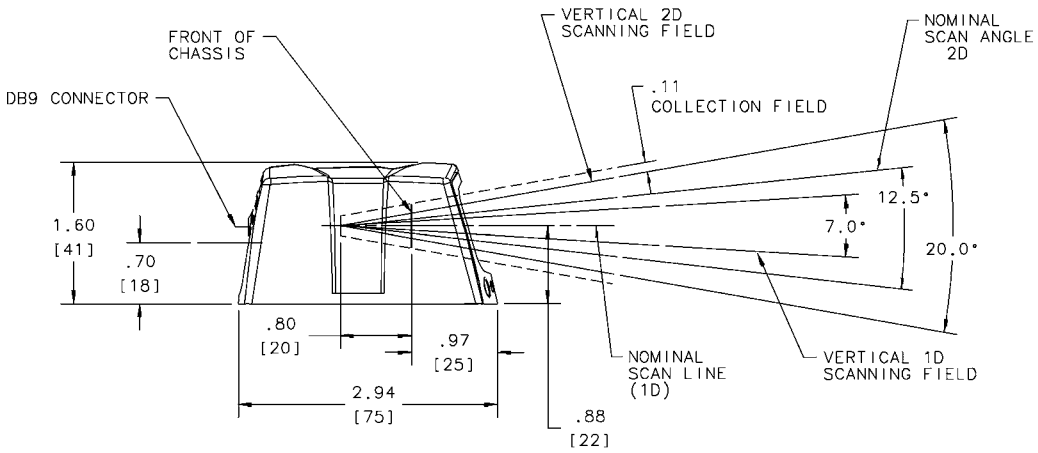

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.


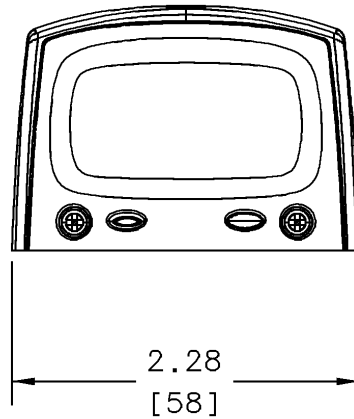


Figure 6-2 Symbol MS2204VHD Mechanical Drawing

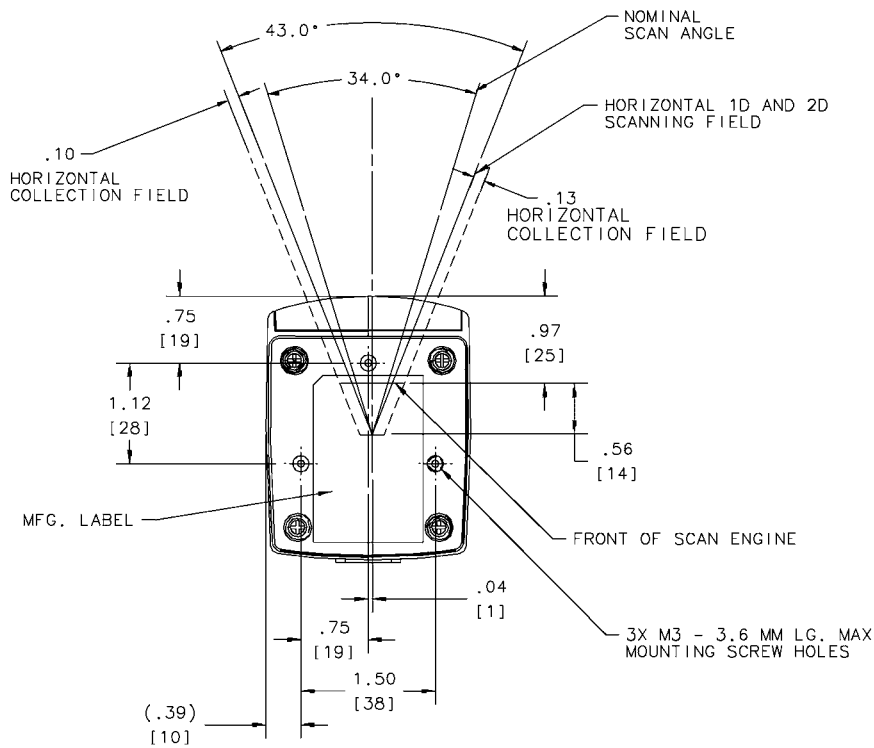

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.

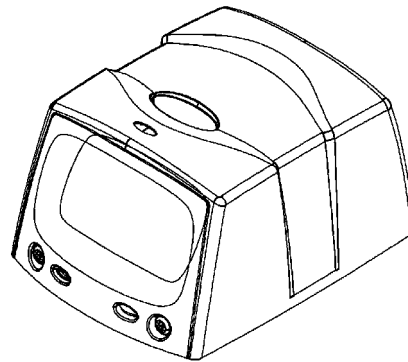


Figure 6-3 Symbol MS2204VHD Mechanical Drawing

Symbol MS2204VHD Technical Specifications

Table 6-2 provides the Symbol MS2204VHD technical specifications.

Table 6-2 Symbol MS2204VHD Technical Specifications @ 23°C

Item	Description
Power Requirements	
Input Voltage	5.0 VDC \pm 10%
Scanning Current	250 \pm 30 mA typical
Standby Current	25 \pm 5 mA typical
V _{cc} Noise Level	200 mV peak-to-peak max.
Laser Power	0.7 mW \pm 0.1 mW, λ = 650 nm nominal
Scan Rate	640 scans/sec.
Scan Frequency: Horizontal	320 Hz \pm 5 Hz
Scan Frequency: Vertical	282 Hz \pm 5 Hz
Frame Rate	24 frames/sec. 12 Hz \pm 1 Hz (vertical)
Print Contrast	Minimum 35% absolute dark/light reflectance differential
Scan Angle	Horizontal: 34° \pm 3° Vertical: 12.5° \pm 3°
Scan Pattern	Smart raster, high density single scan line
Start Time	0.065 sec. to 75% of steady state horizontal amplitude
Skew Tolerance	\pm 15° from plane parallel to symbol (see Figure 6-4 on page 6-7)
Pitch Angle	\pm 30° from normal (see Figure 6-5 on page 6-8)
Roll	\pm 4° (for scanning benchmark label, assuming 3:1 codeword aspect ratio) (see Figure 6-4 on page 6-7)
Decode Depth of Field	See Figure 6-5 on page 6-8 and Figure 6-6 on page 6-10
Beam Deviation (offset from the nominal)	Horizontal: \pm 3.0° Vertical: \pm 3.0° Horizontal tilt: \pm 2°
Additional Post Shock Beam Deviation (2000G Shock)	Horizontal: \pm 3.0° max Vertical: \pm 6.0° max
Ambient Light Immunity	
Sunlight	8,000 ft. candles (86,112 lux)
Artificial Light	450 ft. candles (4,844 lux)
Drop	Multiple 30" drops

Table 6-2 Symbol MS2204VHD Technical Specifications @ 23°C (Continued)

Item	Description
Vibration	Unpowered scanner withstands a random vibration along each of the X, Y and Z axes for a period of one hour per axis, defined as follows: 20 to 80 Hz Ramp up to 0.04 G ² /Hz at the rate of 3dB/octave. 80 to 350 Hz 0.04 G ² /Hz 350 to 2000 Hz Ramp down at the rate of 3 dB/octave.
ESD	± 20kV air discharge ± 8kV indirect discharge
Sealing	IP54
Operating Temperature	-4° to 122°F (-20° to 50°C)
Storage Temperature	-40° to 158°F (-40° to 70°C)
Humidity	5% to 95% non-condensing
Laser Class	CDRH Class II, IEC Class 2
Height	1.60 in. (4.06 cm)
Width	2.28 in. (5.79 cm)
Depth	2.94 in. (7.47 cm)
Weight	4.73 oz. (134 gm)

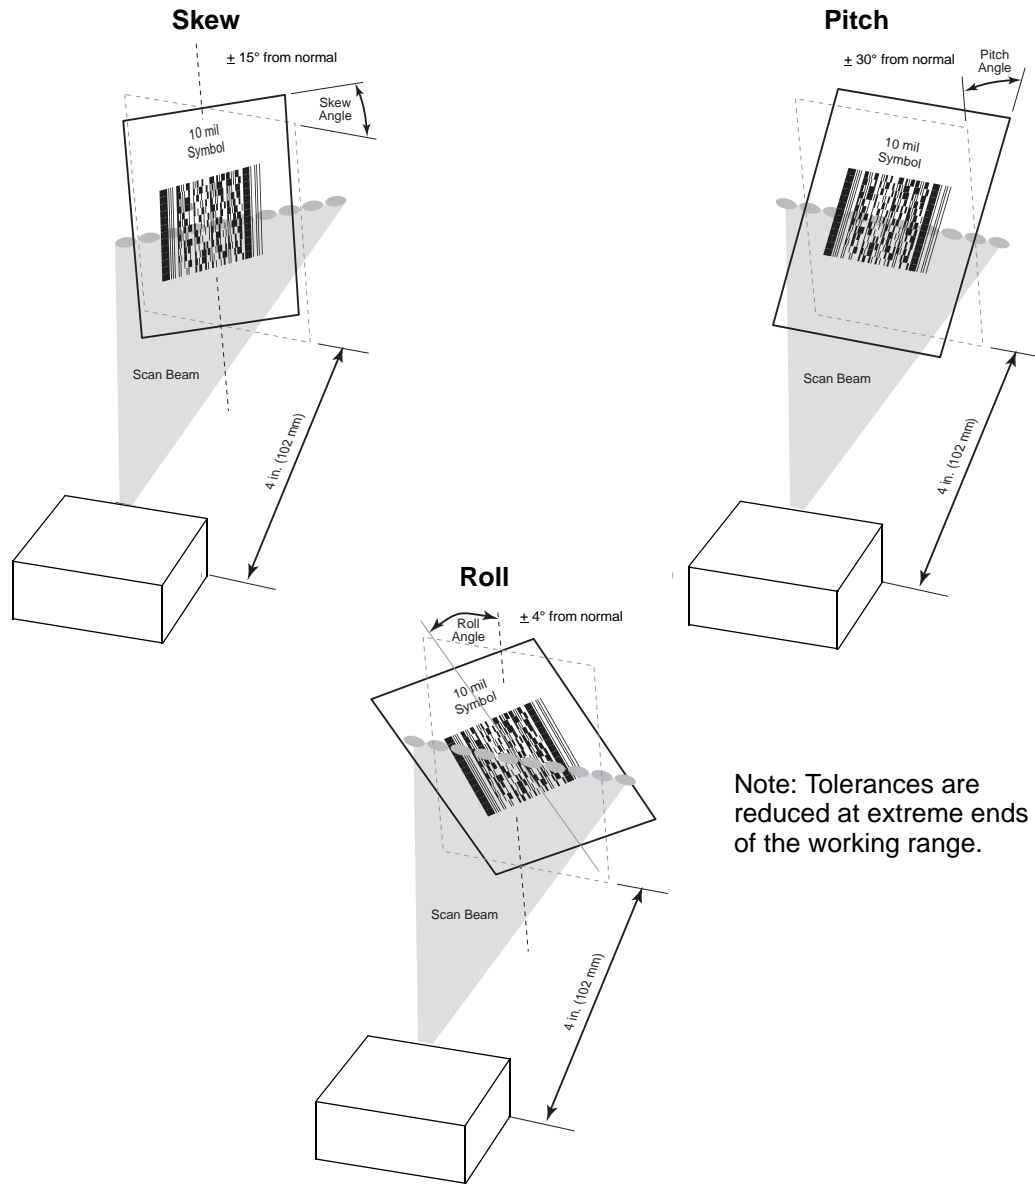


Figure 6-4 Skew, Pitch and Roll

Symbol MS2204VHD Decode Zones

The decode zone is a function of various symbol characteristics including density, print contrast, wide to narrow ratio and edge acurity. Typical values are shown. [Table 6-3 on page 6-9](#) and [Table 6-4 on page 6-11](#) list the typical and guaranteed distances for selected bar code densities. The minimum element width (or “symbol density”) is the width in mils of the narrowest element (bar or space) in the symbol. The maximum usable length of a symbol at any given range is shown below. To calculate this distance, see [Calculating the Usable Scan Length Methodon page 2-8](#).

Symbol MS2204VHD 1D Decode Zone

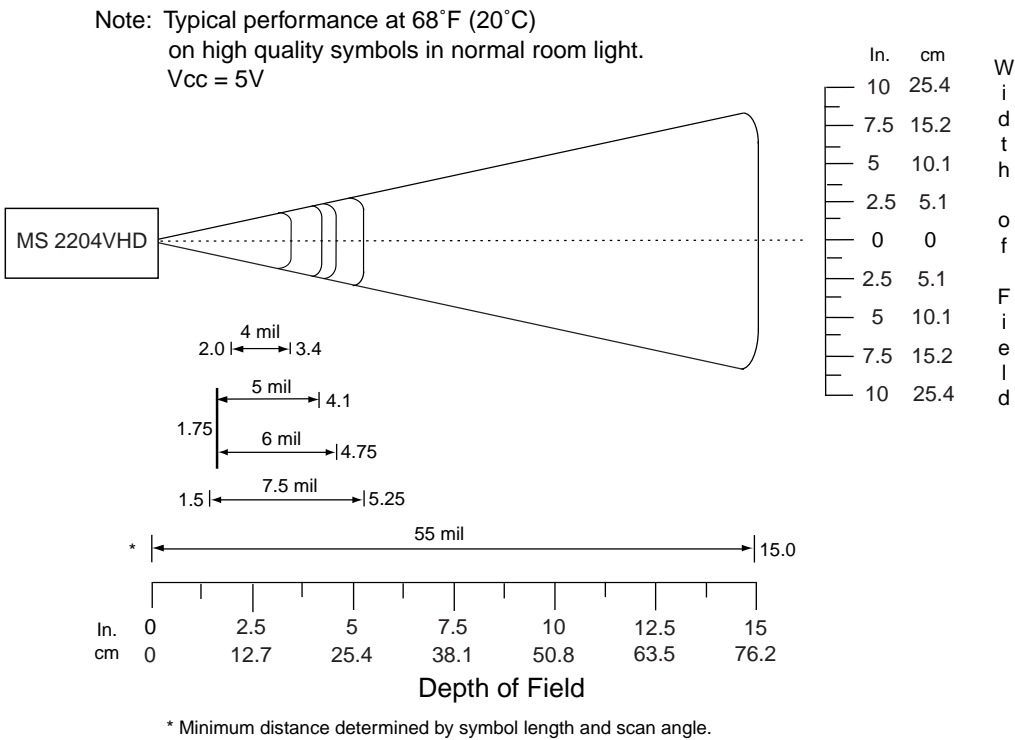


Figure 6-5 Symbol MS2204VHD 1D Slab/Raster Decode Distances

Symbol MS2204VHD 1D Decode Distances

Table 6-3 Symbol MS2204VHD 1D Decode Distances

Symbol Density/ p/n / Bar Code Type	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
4 mil 64-15660-01 Code 39	STI4026 80% MRD	2.0 in. 5.08 cm	3.4 in. 8.64 cm	2.75 in. 7.00 cm	2.8 in. 7.11 cm
5 mil 64-18779-01 Code 39	STI5025 80% MRD	1.75 in. 4.45 cm	4.1 in. 10.41 cm	2.25 in. 5.72 cm	3.5 in. 8.89 cm
6 mil 64-01755-01 Code 39	123 80% MRD	1.75 in. 4.45 cm	4.75 in. 12.07 cm	2.25 in. 5.72 cm	4.0 in. 10.16 cm
7.5 mil 63-04191-01 Code 39	STI30F4 80% MRD	1.50 in. 3.81 cm	5.25 in. 13.34 cm	2.00 in. 5.08 cm	4.75 in. 12.07 cm
55 mil 60-01601-01 Code 39	A 80% MRD	Note 2	15.0 in. 38.10 cm	Note 2	12.5 in. 31.75 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.

2. Near ranges on lower densities largely depend on the width of the bar code and the scan angle.

3. Working range specifications: Photographic quality symbols, pitch = 10°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C.

Symbol MS2204VHD 2D Decode Zone

Note: Typical performance at 68°F (20°C) on high quality symbols in normal room light. Y-module dimension = 3X.
Vcc = 5V

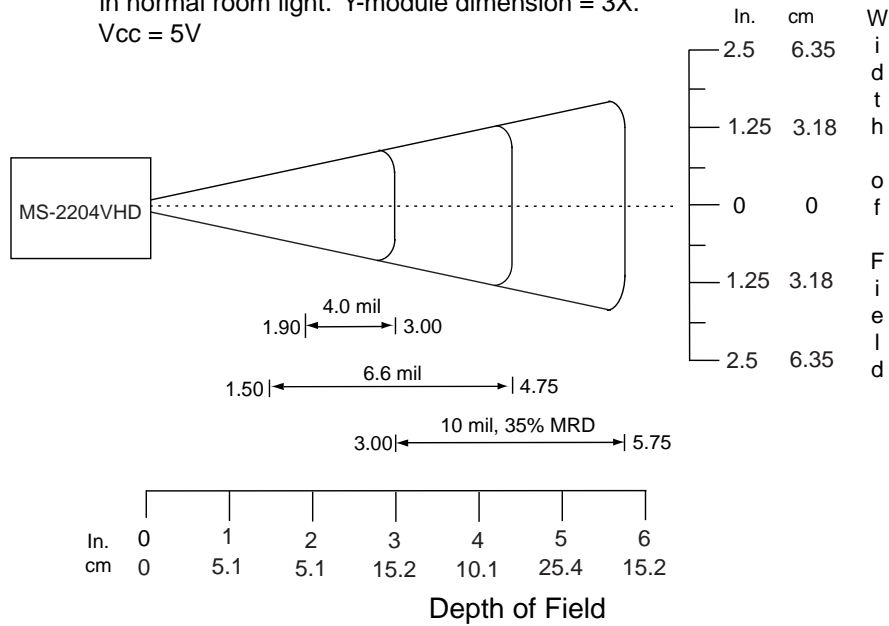


Figure 6-6 Symbol MS2204VHD 2D Slab/Raster Decode Distances

✓ **NOTE** Not optimized for omnidirectional mode.

Symbol MS2204VHD 2D Decode Distances

Table 6-4 Symbol MS2204VHD 2D Slab/Raster Decode Distances

Symbol Density/ p/n / Bar Code Type	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
4 mil 64-17025-01 PDF417	123 80% MRD	1.90 in. 4.83 cm	3.00 in. 7.62 cm	2.20 in. 5.59 cm	2.70 in. 6.89 cm
6.6 mil 64-14035-01 PDF417	ABCDEF 80% MRD	1.50 in. 3.81 cm	4.75 in. 12.07 cm	2.00 in. 5.08 cm	4.50 in. 11.43 cm
10 mil 64-14937-01 PDF417	012345678905 80% MRD	3.00 in. 7.62 cm	5.75 in. 14.61 cm	4.25 in. 10.80 cm	5.00 in. 12.72 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.
2. Near ranges on lower densities largely depend on the width of the bar code and the scan angle.
3. Working range specifications: Photographic quality symbols, pitch = 10°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C.



NOTE Not optimized for omnidirectional mode.

Usable Scan Length

The decode zone is a function of various symbol characteristics including density, print contrast, wide-to-narrow ratio, and edge acuity. Consider width of decode zone at any given distance when designing a system.

Calculating the Usable Scan Length Method on page 2-8 describes how to calculate the usable scan length. The scan angle is provided in the *Usable Scan Length Diagram* on page 2-9.



Chapter 7 Symbol MS3204 Specifications

Introduction

This chapter provides the technical specifications for the Symbol MS3204 scanner.

Symbol MS3204 Electrical Interface

This section describes the pin functions of the Symbol MS3204 scanner.

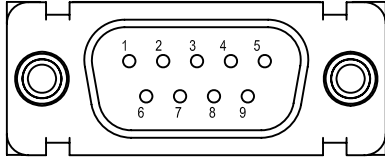



Figure 7-1 Symbol MS3204 Connector

Table 7-1 Symbol MS3204 Electrical Interface

Pin No.	Pin Name	Type*	Function
1	Trigger	I	Signals scanner to begin scanning session.
2	TXD	O	Serial data transmit output. Drives the serial data receive input on the device communicating with the scanner.
3	RXD	I	Serial data receive input. Driven by the serial data transmit output on the device communicating with the scanner.
4	Not used		
5	Ground		Power supply ground input and signal ground reference.
6	Power	I	5.0 VDC \pm 10%
7	CTS	I	Clear-to-send handshaking input line, used only in conjunction with the RTS line. Optionally used by another device to signal the scanner to begin transmitting data.
8	RTS	O	Request-to-send handshaking output line, used only in conjunction with the CTS line. Optionally used by the scanner to signal another device that data is available to send.
9	Beeper/Download	I/O	During normal operation this signal functions as an external beeper drive line. This signal can sink 50mA of current to drive an external beeper, and is normally pulled up. This signal is also used to begin Flash Download operation when grounded externally during power up.

*I = Input O = Output

Symbol MS3204 Mechanical Drawings

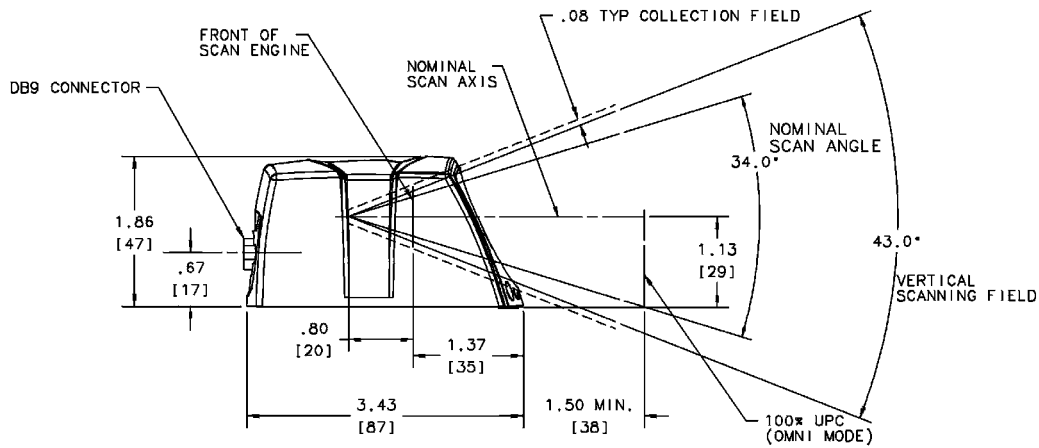

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.


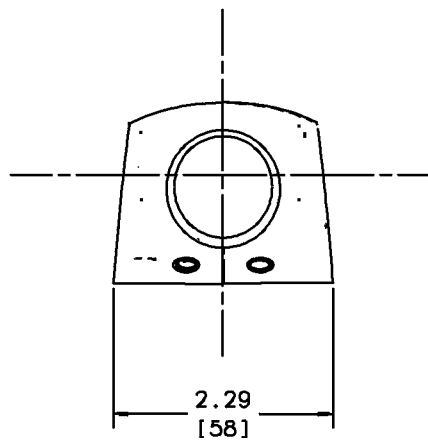


Figure 7-2 Symbol MS3204 Mechanical Drawing

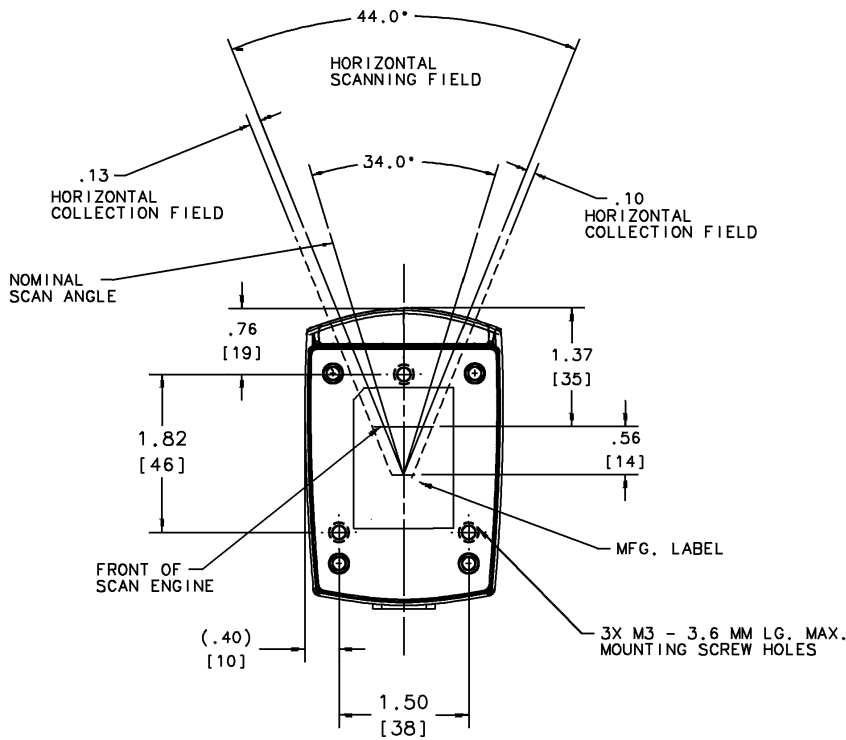

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.

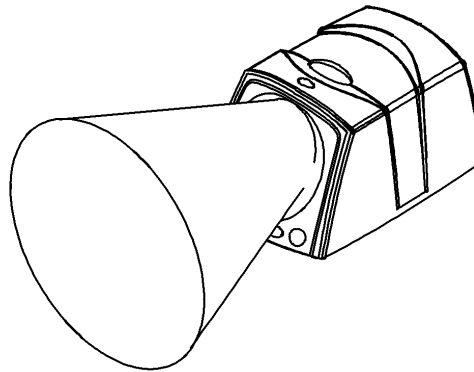


Figure 7-3 Symbol MS3204 Mechanical Drawing

Symbol MS3204 Technical Specifications

Table 7-2 Symbol MS3204 Technical Specifications @ 23°C

Item	Description
Power Requirements	
Input Voltage	+5.0 VDC \pm 10%
Scanning Current	250 \pm 30 mA typical
Standby Current	21 \pm 5 mA typical
V _{cc} Noise Level	200 mV peak-to-peak max.
Laser Power	0.7 mW typical, 0.8 mW maximum, λ = 650 nm
Scan Rate	640 scans/second
Scan Frequency: Horizontal	320 Hz \pm 5 Hz
Scan Frequency: Vertical	282 Hz \pm 5 Hz
Frame Rate	24 frames/sec. 12 Hz \pm 1 Hz (vertical)
Print Contrast	Minimum 35% absolute dark/light reflectance differential (PDF); 35% absolute dark/light reflectance differential (1D)
Scan Angle	Horizontal: 34° \pm 1.5° Vertical: 12.5° \pm 1.5°
Scan Pattern	MS3204-I000 : Omnidirectional, semi-omnidirectional, smart raster, high density single scan line MS3204-E000 : Omnidirectional only
Start Time	0.065 sec. to 75% of steady state horizontal amplitude
Skew Tolerance	\pm 15° from normal (see Figure 7-4 on page 7-7)
Pitch Angle	\pm 30° from normal (see Figure 7-4 on page 7-7)
Roll	\pm 4° from vertical (see Figure 7-4 on page 7-7) (For scanning benchmark label, assuming 3:1 codeword aspect ratio). Note that this is dependent on the decoder.
Decode Depth of Field	See Figure 7-5 on page 7-8 and Figure 7-6 on page 7-10
Beam Deviation (offset from the nominal)	Horizontal: \pm 3.0° Vertical: \pm 3.0° Horizontal tilt: \pm 2°
Additional Post Shock Beam Deviation (2000G Shock)	Horizontal: \pm 3.0° max Vertical: \pm 6.0° max

Table 7-2 Symbol MS3204 Technical Specifications @ 23°C (Continued)

Item	Description
Ambient Light Immunity Sunlight Artificial Light	8,000 ft. candles (86,112 lux) 450 ft. candles (4,844 lux)
Drop	Multiple 30 inch drops
Vibration	Unpowered scanner withstands a random vibration along each of the X, Y and Z axes for a period of one hour per axis, defined as follows: 20 to 80 Hz Ramp up to 0.04 G ² /Hz at the rate of 3dB/octave. 80 to 350 Hz 0.04 G ² /Hz 350 to 2000 Hz Ramp down at the rate of 3 dB/octave.
ESD	± 20kV air discharge ± 8kV indirect discharge
Sealing	IP54
Operating Temperature	-22 °F to 122 °F (-30 °C to 50 °C)
Storage Temperature	-40 °F to 158 °F (-40 °C to 70 °C)
Humidity	5% to 95% non-condensing
Laser Class	CDRH Class II, IEC Class 2
Height	1.98 in. (5.03 cm)
Width	2.41 in. (6.12 cm)
Depth	3.60 in. (9.14 cm)
Weight	4.97 oz. (141 g)

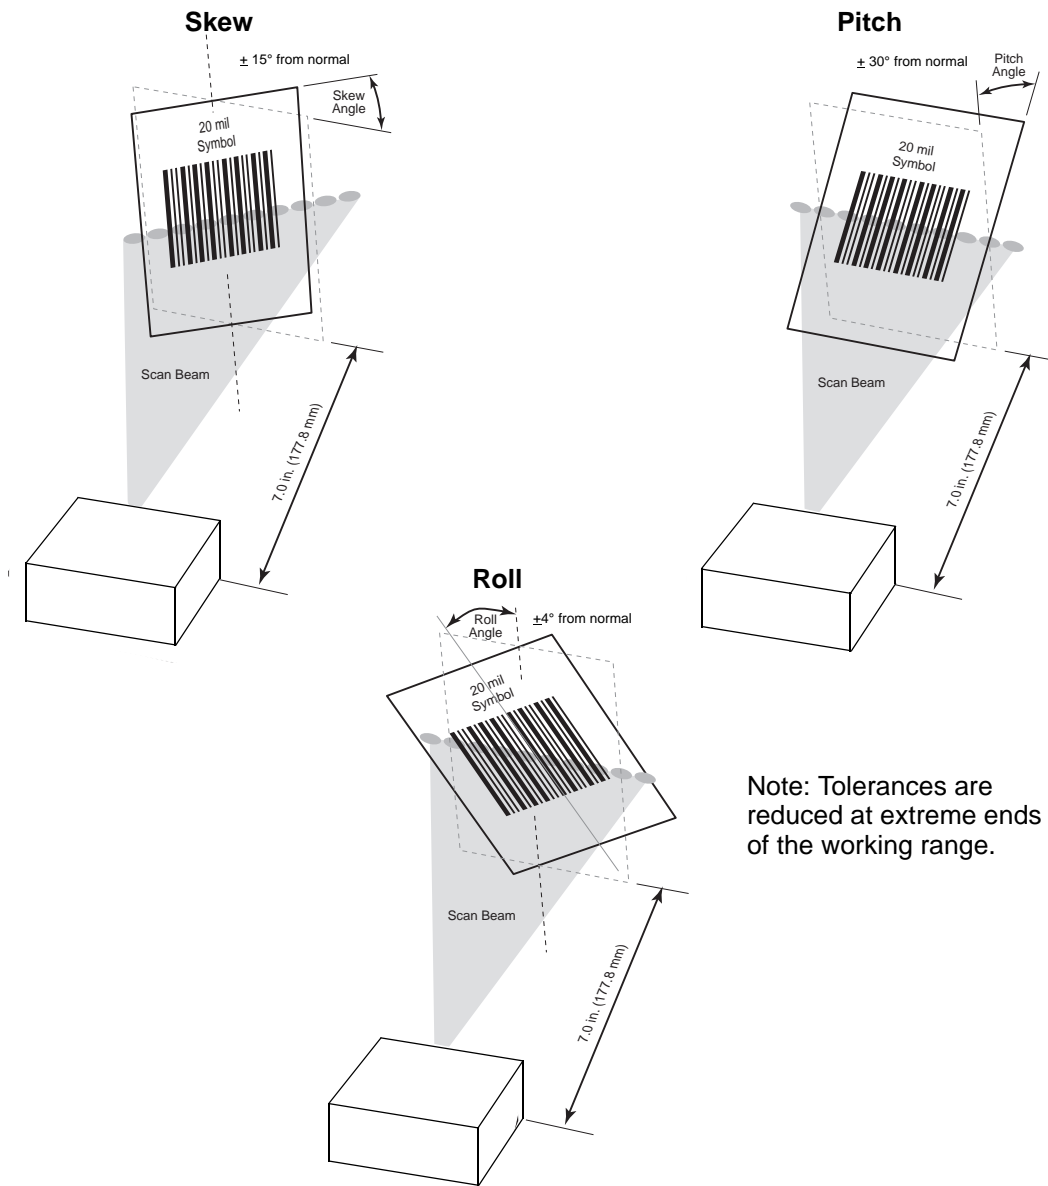



Figure 7-4 Skew, Pitch and Roll

Symbol MS3204 Decode Zones

The decode zone is a function of various symbol characteristics including density, print contrast, wide to narrow ratio and edge acuity. The figures shown are typical values. [Table 7-3 on page 7-9](#) and [Table 7-4 on page 7-11](#) list the typical and guaranteed distances for selected bar code densities. The minimum element width (or "symbol density") is the width in mils of the narrowest element (bar or space) in the symbol. The maximum usable length of a symbol at any given range is shown below. To calculate this distance, see [Calculating the Usable Scan Length Method on page 2-8](#).

Omnidirectional Decode Distances

Note: Typical performance at 68°F (20°C)
on high quality symbols in normal room light.
Vcc = 5V

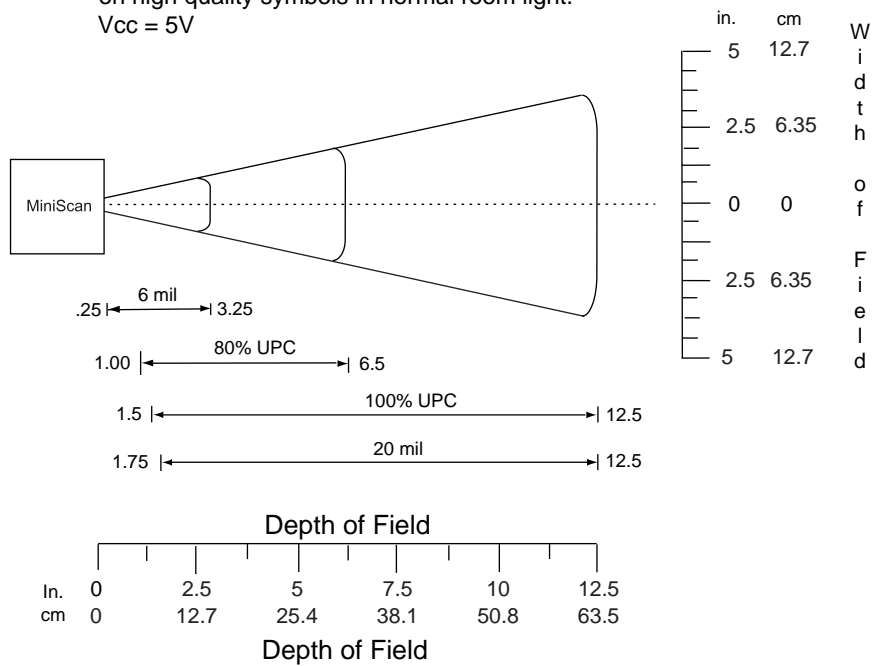

* Minimum distance determined by symbol length and scan angle.

Figure 7-5 Symbol MS3204 Omnidirectional Decode Zone

Table 7-3 Symbol MS3204 Omnidirectional Decode Distances

Symbol Density/ p/n / Bar Code Type	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
6.0 mil 60-01755-01 Code 39	123 80% MRD	0.25 in. 0.64 cm	3.25 in. 8.3 cm	0.75 in. 1.9 cm	2.25 in. 5.7 cm
64-06629-01 80% UPC	0080015 80% MRD	1.0 in. 2.5 cm	6.5 in. 16.5 cm	1.5 in. 3.8 cm	4.5 in. 11.4 cm
13 mil 64-05303-01 100% UPC	012345678905 80% MRD	1.5 in. 3.8 cm	12.5 in. 31.2 cm	Note 2	9.5 in. 24.1 cm
20 mil 1D 60-02710-03 LC 35%	123 80% MRD	1.75 in. 4.4 cm	12.5 in. 31.8 cm	Note 2	10.0 in. 25.4 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.

2. Near ranges on largely depend on the width of the bar code and the scan angle.

3. Working range specifications: Photographic quality symbols, pitch = 15°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C, Vcc = 5V.

4. Measured from the front of the scanner.

2D Slab/Raster Decode Distances (Symbol MS3204-I000 Only)

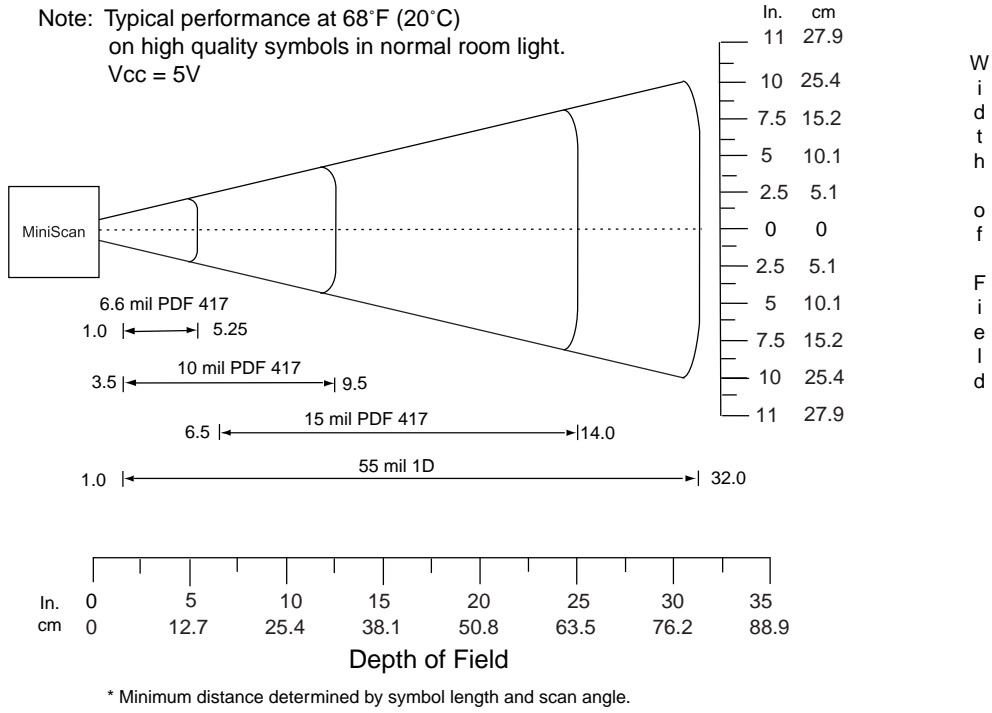


Figure 7-6 Symbol MS3204 2D Slab/Raster Decode Distance

Table 7-4 Symbol MS3204-I000 2D Slab/Raster Decode Distances

Symbol Density/ p/n / Bar Code Type	Bar Code Content/ Contrast ¹	Typical Working Ranges ³		Guaranteed Working Ranges ³	
		Near	Far	Near	Far
6.6 mil 64-14035-01 2D	123 80% MRD	1.0 in. 2.54 cm	5.25 in. 13.34 cm	1.5 in. 3.8 cm	3.75 in. 9.5 cm
10 mil 64-14037-01 2D	ABCDEF 80% MRD	3.5 in. 8.89 cm	9.5 in. 24.13 cm	5.0 in. 12.7 cm	7.5 in. 9.5 cm
15 mil 64-14038-01 2D	012345678905 80% MRD	6.5 in. 16.51 cm	14.0 in. 35.6 cm	Note 2	11.0 in. 24.1 cm
55 mil 64-17458-01 1D	CD 80% MRD	1.0 in. 2.54 cm	32 in. 81.3 cm	Note 2	22.0 in. 55.9 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.

2. Near ranges on largely depend on the width of the bar code and the scan angle.

3. Working range specifications: Photographic quality symbols, pitch = 15°, skew = 0°, roll = 0°, ambient light < 150 ft. candles, and temperature = 23 °C, Vcc = 5V.

4. Measured from the front of the scanner.

Usable Scan Length

The decode zone is a function of various symbol characteristics including density, print contrast, wide-to-narrow ratio, and edge acuity. Consider width of decode zone at any given distance when designing a system.

Calculating the Usable Scan Length Method on page 2-8 describes how to calculate the usable scan length. The scan angle is provided in *Table 7-2 on page 7-5*.



Chapter 8 Symbol MS954 Specifications

Introduction

This chapter provides the technical specifications for the Symbol MS954 scanner.

Symbol MS954 Electrical Interface

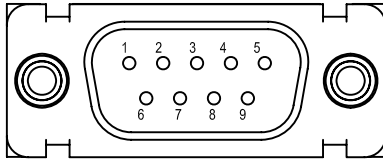


Figure 8-1 MiniScan Connector


[Table 8-1](#) lists the pin functions of the Symbol MS954 interface.

Table 8-1 Symbol MS954 Electrical Interface

Pin No.	Pin Name	Type*	Function
1	Trigger	I	Signals scanner to begin scanning session.
2	TXD	O	Serial data transmit output. Drives the serial data receive input on the device communicating with the scanner.
3	RXD	I	Serial data receive input. Driven by the serial data transmit output on the device communicating with the scanner.
4	Not used		
5	Ground		Power supply ground input and signal ground reference.
6	Power	I	5.0 VDC \pm 10%
7	CTS	I	Clear-to-send handshaking input line, used only in conjunction with the RTS line. Optionally used by another device to signal the scanner to begin transmitting data.
8	RTS	O	Request-to-send handshaking output line, used only in conjunction with the CTS line. Optionally used by the scanner to signal another device that data is available to send.
9	Beeper/Download	I/O	During normal operation this signal functions as an external beeper drive line. This signal can sink 50 mA of current to drive an external beeper, and is normally pulled up. This signal is also used to begin Flash Download operation when grounded externally during power up.

***I = Input O = Output**

Symbol MS954 Mechanical Drawings

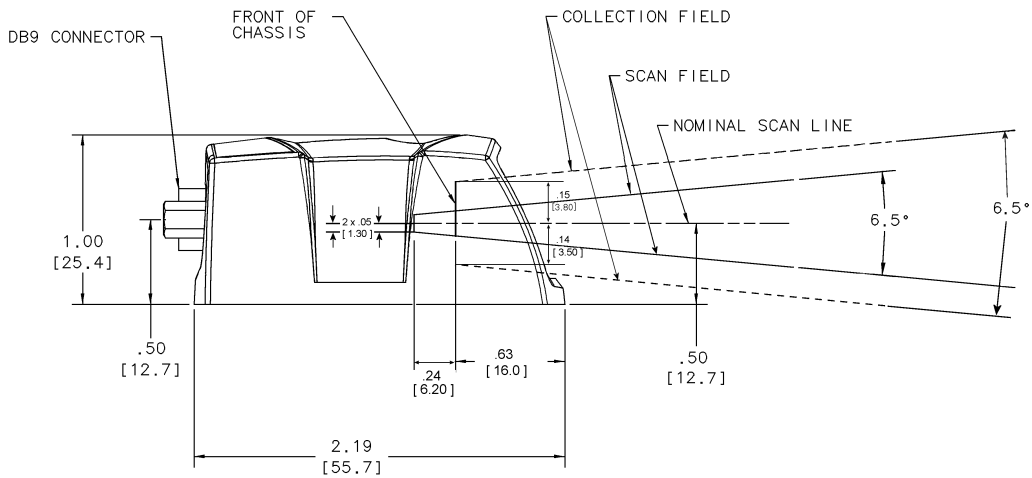

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.


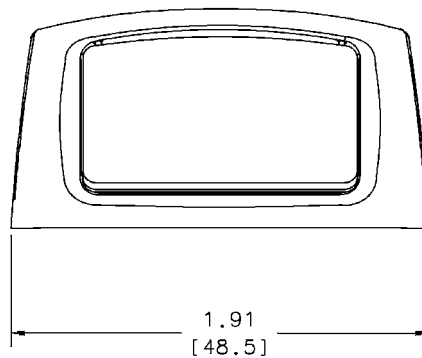


Figure 8-2 Symbol MS954 Mechanical Drawing

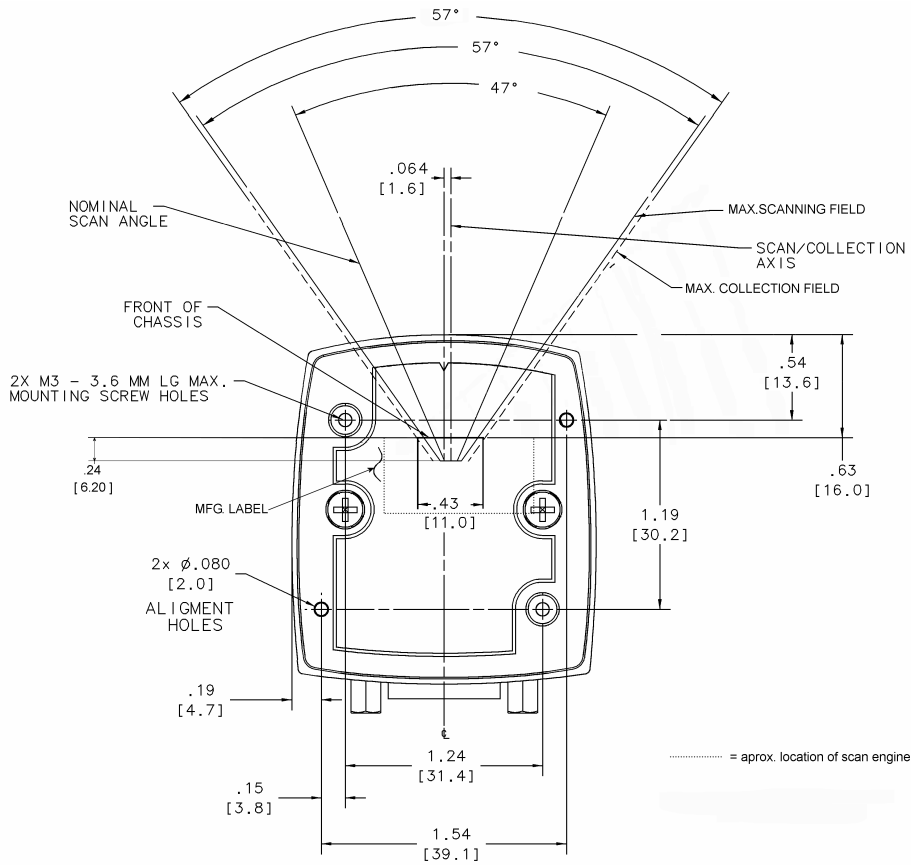

Notes:

Unless otherwise specified:

- Dimensions are in inches, dimensions in [] are mm.
- User mounting tolerances are not included.

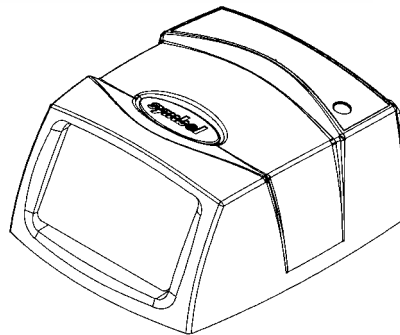


Figure 8-3 Symbol MS954 Mechanical Drawing

Symbol MS954 Technical Specifications

Table 8-2 Symbol MS954 Technical Specifications @ 23°C

Item	Description
Power Requirements	
Input Voltage	5.0 VDC \pm 10%
Scanning Current	95 mA typical; 125 mA max
Standby Current	27 mA typical; 50 mA max
V _{cc} Noise Level	200 mV peak-to-peak max.
Laser Power	1.5 mW typical, λ = 650 nm nominal
Scan Rate	104 (\pm 12) scans/sec (bidirectional)
Print Contrast	Minimum 25% absolute dark/light reflectance measured at 650 nm.
Scan Angle	Default (Wide): 47° \pm 3° Alternate (Narrow): 35° \pm 3° Note: The Symbol MS954 does not require margin on either side of the bar code to decode. The 47° scan line provides identical scanning performance to older minscans (e.g., Symbol MS923) with a scan line of 53°.
Scan Pattern	Single scan line
Skew Tolerance	\pm 50° from normal (see Figure 8-4 on page 8-6)
Pitch Angle	\pm 65° from normal (see Figure 8-4 on page 8-6)
Roll	\pm 35° from vertical (see Figure 8-4 on page 8-6)
Decode Depth of Field	See Figure 8-5 on page 8-7
Ambient Light Immunity	
Sunlight	10,000 ft. candles (107,640 lux)
Artificial Light	450 ft. candles (4,844 lux)
Drop	Multiple 30" drops
Vibration	Unpowered engine withstands a random vibration along each of the X, Y, and Z axes for a period of 1 hour per axis, defined as follows: 20 - 80 Hz: ramp up to 0.04G ² /Hz at the rate of 3dB/octave. 80 - 350 Hz: 00.04 G ² /Hz. 350 - 2000 Hz: ramp down at the rate of 3dB/octave.
ESD	\pm 15kV air discharge \pm 8kV indirect discharge
Operating Temperature	-4° F to 140° F (-20° C to 60° C)
Storage Temperature	-40°F to 158° F (-40° C to 70° C)
Humidity	95% (non-condensing)

Table 8-2 Symbol MS954 Technical Specifications @ 23°C (Continued)

Item	Description
Laser Class	CDRH Class II, IEC Class 2
Height	1.02 in. (2.59 cm) maximum
Width	1.93 in. (4.90 cm) maximum
Depth	2.31 in. (5.87 cm) maximum
Weight	1.67 oz. (47.34 g)


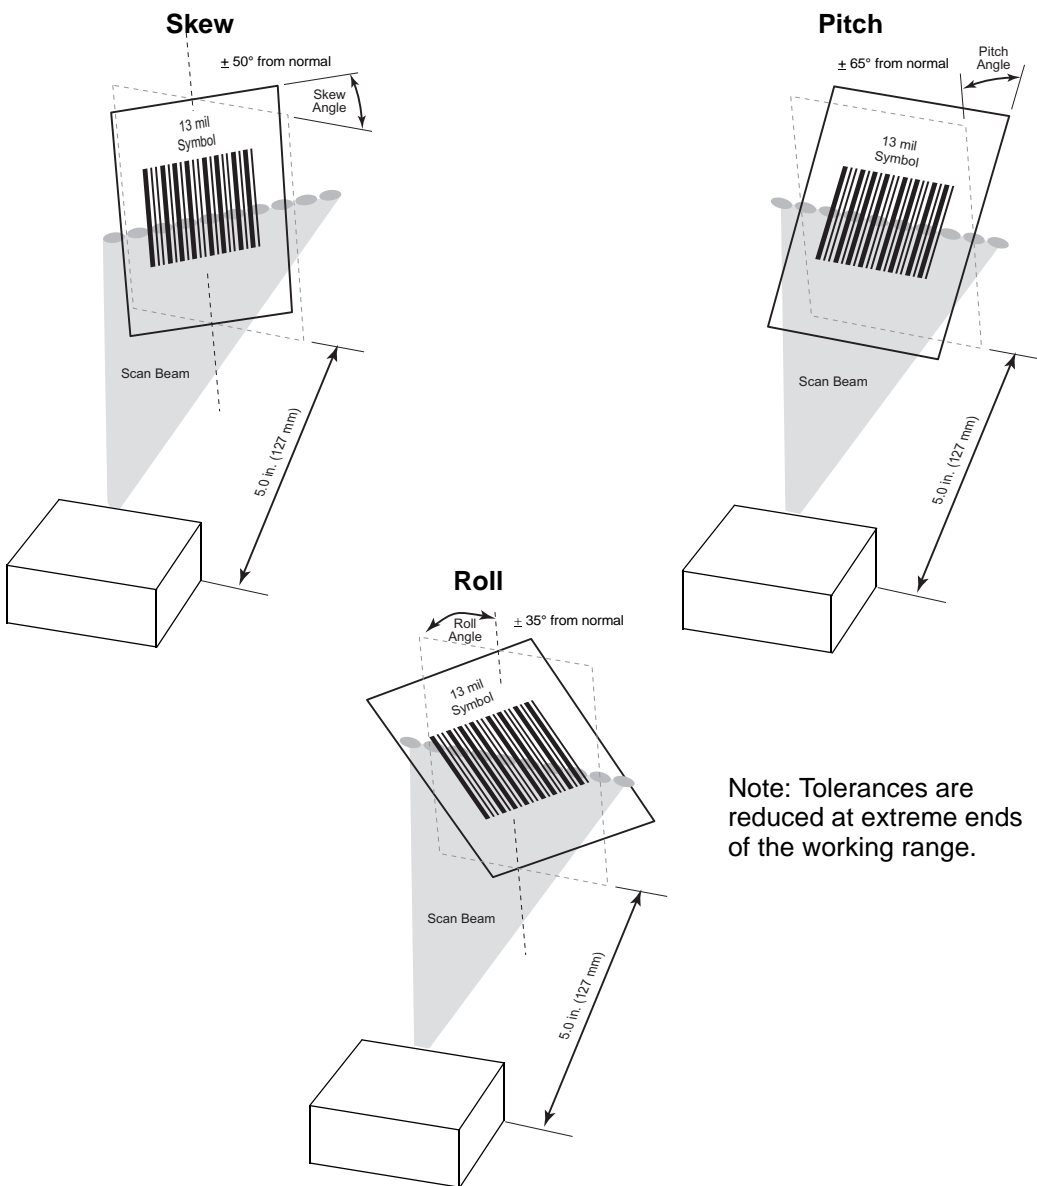


Figure 8-4 Skew, Pitch and Roll

Symbol MS954 Decode Zone

The decode zone for the Symbol MS954 scanner is shown in [Figure 8-5](#). The figures shown are typical values. [Table 8-3](#) lists the typical and guaranteed distances for selected bar code densities. The minimum element width (or “symbol density”) is the width in mils of the narrowest element (bar or space) in the symbol. To calculate this distance, see [Calculating the Usable Scan Length Method on page 2-8](#).

Note: Typical performance at 73° F (23° C)
on high quality symbols.

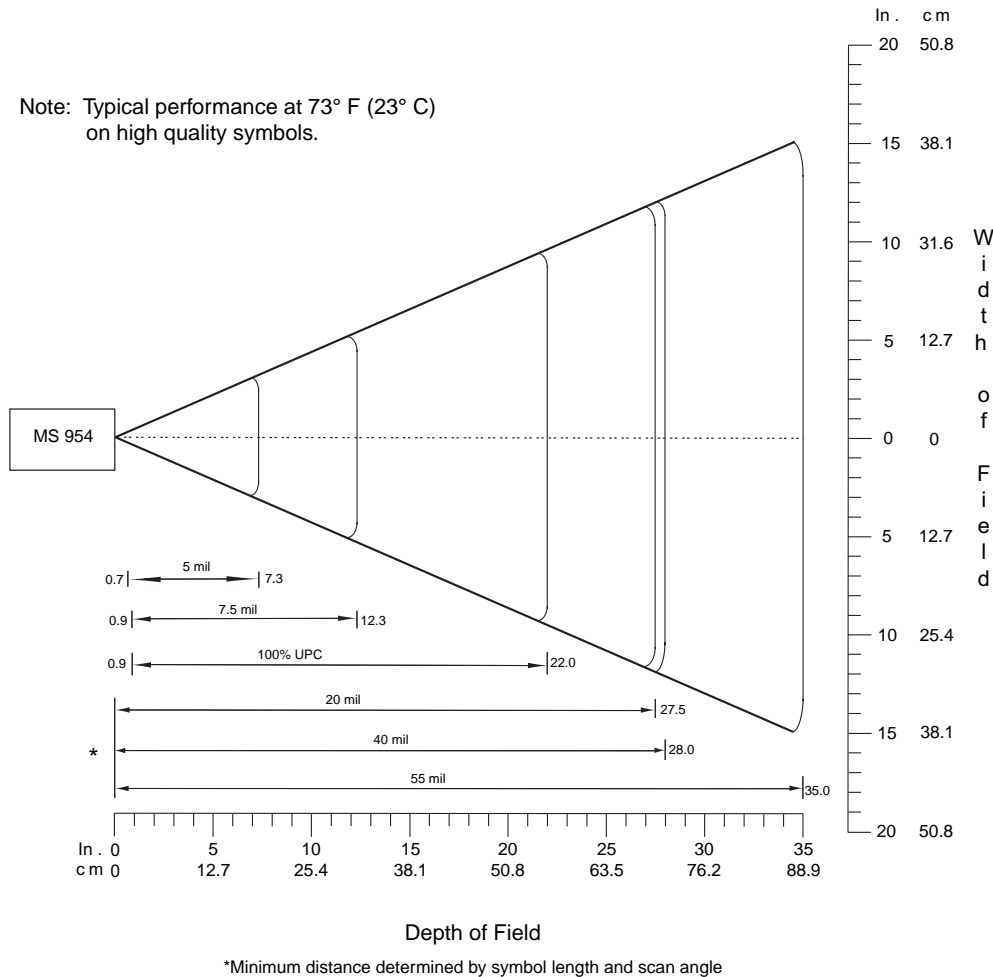

*Minimum distance determined by symbol length and scan angle

Figure 8-5 Symbol MS954 Decode Zone

Table 8-3 Symbol MS954 Decode Distances

Symbol Density/ p/n / Bar Code Type/ W-N Ratio	Bar Code Content/ Contrast ¹	Typical Working Ranges		Guaranteed Working Ranges	
		Near	Far	Near	Far
5 mil 64-17453-01 Code 39; 2.5:1	ABCDEFGH 90% MRD	0.7 in. 1.8 cm	7.3 in. 18.54 cm	1.6 in. 4.06 cm	4.8 in. 12.19 cm
7.5 mil 64-17452-01 Code 39; 2.5:1	ABCDEF 90% MRD	0.9 in. 2.29 cm	12.3 in. 31.24 cm	1.4 in. 3.56 cm	8.8 in. 22.35 cm
13 mil 64-05303-01 100% UPC	12345678905 90% MRD	0.9 in. 2.29 cm	22.0 in. 55.88 cm	1.1 in. 2.79 cm	15.7 in. 39.88 cm
20 mil 60-01429-01 Code 39; 2.2:1	123 90% MRD	Note 2	27.5 in. 69.85 cm	Note 2	22.0 in. 55.88 cm
40 mil 64-17457-01 Code 39; 2.2:1	AB 90% MRD	Note 2	28.0 in. 71.12 cm	Note 2	23.0 in. 58.42 cm
55 mil 64-17458-01 Code 39; 2.2:1	CD 90% MRD	Note 2	35.0 in. 88.90 cm	Note 2	29.0 in. 73.66 cm

Notes:

1. Contrast measured as Mean Reflective Difference (MRD) at 650 nm.

2. Near ranges on lower densities (not specified) largely depend on the width of the bar code and the scan angle.

3. Working range specifications at ambient temperature (23°C), pitch=15°, roll=0°, skew=0°, photographic quality, ambient light<200 ft-c.

Usable Scan Length

The decode zone is a function of various symbol characteristics including density, print contrast, wide-to-narrow ratio, and edge accuracy. Consider the width of the scan line at any given distance when designing a system.

Calculating the Usable Scan Length Method (Symbol MS954 Only) on page 2-9 describes how to calculate the usable scan length. The scan angle is provided in the usable scan length diagram on [page 2-9](#).

Chapter 9 Maintenance and Troubleshooting

Introduction

The chapter provides information on maintenance and troubleshooting.

Maintenance

Cleaning the exit window is the only maintenance required. Do not allow any abrasive material to touch the window. Clean the scan window with a damp cloth and, if necessary, a non-ammonia based detergent.

Troubleshooting

Table 9-1 *Troubleshooting*

Problem	Possible Cause	Possible Solutions
No red LED or nothing happens during a scan attempt.	No power to the scanner.	Check the system power. Confirm that the correct host interface cable is used.
		Connect the power supply.
		Re-connect loose cables.
Scanner cannot read the bar code.	Interface/power cables are loose.	Re-connect loose cables.
	Scanner is not programmed for the correct bar code type.	Make sure the scanner is programmed to read the type of bar code to be scanned. Scan other bar code(s) and bar code types.
	Incorrect communication parameters.	Set the correct communication parameters (baud rate, parity, stop bits, etc.)
	Bar code symbol is unreadable.	Check the symbol to make sure it is not defaced. Try scanning similar symbols of the same code type.
	Inappropriately hot environment.	Remove the scanner from the hot environment, and allow it to cool down.
Laser activates, followed by a beep sequence.	Beeper is configured.	Refer to Table 3-1 on page 3-7 for beeper indication descriptions.

Table 9-1 Troubleshooting

Problem	Possible Cause	Possible Solutions
Scanner does not function.	Accidentally scanned Host Trigger , Level Trigger , or Pulse Trigger from <i>Trigger Options</i> on page 3-5.	<p>Download the <i>SSI Demonstration Utility for MiniScan</i> from http://www.symbol.com/contactsupport. Install the utility, then use the utility to change the Trigger Mode parameter 138 (8Ah) to the value 04h (Continuous Mode) via SSI. See <i>Chapter 11, Simple Serial Interface (SSI)</i>, and <i>Trigger Modes</i> on page 10-14.</p> <p>Alternatively, use the utility's soft trigger button to activate the scanner, and scan the Continuous option of the Trigger Mode parameter.</p> <p>Note that this utility does not work with Motorola's non-handshaking interface cable (p/n 25-63736-01R).</p> <hr/> <p>Connect an interface cable which has an external trigger jack, a push button trigger cable, and a power supply to the scanner. You can purchase these cables from Motorola, or make a similar one using the scanner's pinouts as a reference. See the specification chapter for your MiniScan model for pinouts.</p> <p>Using a momentary switch, short the scanner's trigger line to ground to activate the laser, then scan the Continuous option of the Trigger Mode parameter.</p>




NOTE If after performing these checks the symbol still does not scan, contact the distributor or call Motorola Enterprise Mobility Support at the telephone number listed on [page xv](#).

Chapter 10 Parameter Menus

Introduction

This chapter describes the programmable parameters, and provides bar codes for programming and hexadecimal equivalents for host download programming.

Throughout the programming bar code menus, default values are indicated with asterisks (*).

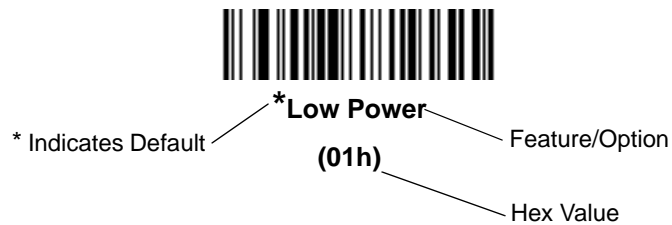

Operational Parameters

MiniScan scanners are shipped with the default settings shown in [Table 10-1 on page 10-2](#). These default values are stored in non-volatile memory and are preserved even when the scanner is powered down.

There are two ways to change the default values:

- Scan the appropriate bar codes in this chapter. These new values replace the standard default values in memory. To recall the default parameter values, scan the [Set All Defaults](#) bar code on [page 10-8](#).
- Download data through the scanner's serial port using Symbol's Simple Serial Interface (SSI). Hexadecimal parameter numbers are shown in this chapter below the parameter title, and options are shown in parenthesis beneath the accompanying bar codes. See the *Simple Serial Interface (SSI) Programmer's Guide* for detailed instructions for changing parameters using this method.

Default Table

[Table 10-1](#) lists the defaults for all parameters, and the page number each parameter appears on. To change any option, scan the appropriate bar code(s).

Table 10-1 *Default Table*

Parameter	Parameter Number	Default	Page Number
Set Default Parameter		All Defaults	10-8
Scanning Options			
Beeper Volume	8Ch	High Volume	10-10
Beeper Tone	91h	High Frequency	10-11
Beeper Frequency Adjustment	F07 91h	2500 Hz	10-11
Laser On Time	88h	3.0 sec: MS954 5.0 sec: MS2204; MS2204VHD; MS3204	10-12
Scan Angle (MS1204FZY and MS954 only)	BFh	Wide	10-12
Power Mode	80h	Low Power	10-13
Trigger Mode	8Ah	Level	10-14
Scanning Mode (MS2204, MS2204VHD, and MS3204 only)	8Dh	Smart Raster	10-15
Aiming Mode	F0h 7Eh	Disabled	10-16
Raster Height (MS2204, MS2204VHD, and MS3204-I000 only)	E4h	15	10-17
Raster Expansion Rate (MS2204, MS2204VHD, and MS3204-I000 only)	E5h	11	10-17

Table 10-1 Default Table (Continued)

Parameter	Parameter Number	Default	Page Number
Time-out Between Same Symbol	89h	0.6 sec 1.0 sec: MS954	10-18
Time-out Between Different Symbols	90h	0.0 sec	10-18
Beep After Good Decode	38h	Enable	10-19
Transmit "No Read" Message	5Eh	Disable	10-20
Parameter Scanning	ECh	Enable	10-21
Linear Code Type Security Level	4Eh	1: MS1204FZY; MS954 2: MS2204; MS2204VHD; MS3204	10-22
Bi-directional Redundancy	43h	Disable	10-24
UPC/EAN			
UPC-A	01h	Enable	10-25
UPC-E	02h	Enable	10-25
UPC-E1	0Ch	Disable	10-26
EAN-8	04h	Enable	10-27
EAN-13	03h	Enable	10-27
Bookland EAN	53h	Disable	10-28
UPC/EAN Coupon Code	55h	Disable	10-29
Decode UPC/EAN Supplementals	10h	Ignore	10-30
User-Programmable Supplementals Supplemental 1: Supplemental 2:	F1h 43h F1h 44h		10-34
Decode UPC/EAN Supplemental Redundancy	50h	20 7: MS954	10-34
Transmit UPC-A Check Digit	28h	Enable	10-35
Transmit UPC-E Check Digit	29h	Enable	10-35
Transmit UPC-E1 Check Digit	2Ah	Enable	10-36
UPC-A Preamble	22h	System Character	10-37
UPC-E Preamble	23h	System Character	10-38
UPC-E1 Preamble	24h	System Character	10-39
Convert UPC-E to A	25h	Disable	10-40
Convert UPC-E1 to A	26h	Disable	10-41

Table 10-1 Default Table (Continued)

Parameter	Parameter Number	Default	Page Number
EAN-8 Zero Extend	27h	Disable	10-41
Bookland ISBN Format	F1h 40h	ISBN-10	10-42
UPC/EAN Security Level	4Dh	0	10-43
Linear UPC/EAN Decode	44h	Disable	10-44
UPC Half Block Stitching (MS2204/MS2204VHD/MS3204 only)	4Ah	Disable	10-44
Code 128			
Code 128	08h	Enable	10-45
UCC/EAN-128	0Eh	Enable	10-45
ISBT 128	54h	Disable Enable: MS1204FZY	10-46
Code 128 Decode Performance (MS2204/MS2204VHD/MS3204 only)	48h	Enable	10-47
Code 128 Decode Performance Level (MS2204/MS2204VHD/MS3204 only)	49h	Level 3	10-48
Code 39			
Code 39	00h	Enable	10-49
Trioptic Code 39	0Dh	Disable	10-49
Convert Code 39 to Code 32	56h	Disable	10-50
Code 32 Prefix	E7h	Enable Disable - MS954	10-51
Set Length(s) for Code 39	12h 13h	Length within Range: 02-55:MS1204FZY; MS954 01-55:MS2204; MS2204VHD; MS3204	10-52
Code 39 Check Digit Verification	30h	Disable	10-53
Transmit Code 39 Check Digit	2Bh	Disable	10-53
Code 39 Full ASCII Conversion	11h	Disable	10-54
Code 39 Decode Performance (MS2204/MS2204VHD/MS3204 only)	46h	Enable	10-55
Code 39 Decode Performance Level (MS2204/MS2204VHD/MS3204 only)	47h	Level 3	10-56

Table 10-1 Default Table (Continued)

Parameter	Parameter Number	Default	Page Number
Code 93			
Code 93	09h	Disable	10-57
Set Length(s) for Code 93	1Ah 1Bh	Length within Range: 04-55	10-58
Code 11			
Code 11	0Ah	Disable	10-59
Set Length(s) for Code 11	1Ch 1Dh	Length within Range: 04-55	10-60
Code 11 Check Digit Verification	34h	Disable	10-61
Transmit Code 11 Check Digits	2Fh	Disable	10-62
Interleaved 2 of 5			
Interleaved 2 of 5	06h	Disable Enable: MS1204FZY: MS954	10-63
Set Length(s) for I 2 of 5	16h 17h	1 Discrete Length: 14	10-64
I 2 of 5 Check Digit Verification	31h	Disable	10-65
Transmit I 2 of 5 Check Digit	2Ch	Disable	10-66
Convert I 2 of 5 to EAN 13	52h	Disable	10-66
Discrete 2 of 5			
Discrete 2 of 5	05h	Disable	10-67
Set Length(s) for D 2 of 5	14h 15h	1 Discrete Length: 12	10-68
Chinese 2 of 5			
Chinese 2 of 5	0xF0 0x98	Disable	10-69
Codabar			
Codabar	07h	Disable	10-70
Set Lengths for Codabar	18h 19h	Length within Range: 05-55	10-71
CLSI Editing	36h	Disable	10-72
NOTIS Editing	37h	Disable	10-72
MSI Plessey			
MSI Plessey	0Bh	Disable	10-73
Set Length(s) for MSI Plessey	1Eh 1Fh	Length Within Range: 06 - 55	10-74

Table 10-1 Default Table (Continued)

Parameter	Parameter Number	Default	Page Number
MSI Plessey Check Digits	32h	One	10-75
Transmit MSI Plessey Check Digit	2Eh	Disable	10-75
MSI Plessey Check Digit Algorithm	33h	Mod 10/Mod 10	10-76
PDF417/MicroPDF417 (MS2204, MS2204VHD, and MS3204 only)			
PDF417	0Fh	MS220X: Enable MS3204: Disable	10-77
MicroPDF417	E3h	Disable	10-77
MicroPDF Performance	F0h 65h	Standard	10-78
Code 128 Emulation	7Bh	Disable	10-79
GS1 DataBar			
GS1 DataBar-14	F0h 52h	Disable	10-80
GS1 DataBar Limited	F0h 53h	Disable	10-80
GS1 DataBar Expanded	F0h 54h	Disable	10-81
Convert GS1 DataBar to UPC/EAN (MS1204FZY only)	F0h 8Dh	Disable	10-82
Composite (MS2204, MS2204VHD and MS3204 only)			
CC-C	F0h 55h	Disable	10-83
CC-AB	F0h 56h	Disable	10-84
TLC-39	F0h 73h	Disable	10-84
UPC Composite Mode	F0h 58h	Always Linked	10-85
Data Options			
Transmit Code ID Character	2Dh	None	10-86
Prefix/Suffix Values			10-88
Prefix	69h	NULL	
Suffix 1	68h	LF	
Suffix 2	6Ah	CR	
Scan Data Transmission Format	EBh	Data as is	10-89
Simple Serial Interface (SSI) Options			
Baud Rate	9Ch	9600	10-91
Parity	9Eh	None	10-93
Check Parity	97h	Enable	10-94
Software Handshaking	9Fh	ACK/NAK	10-95

Table 10-1 *Default Table (Continued)*

Parameter	Parameter Number	Default	Page Number
Host RTS Line State	9Ah	Low	10-96
Decode Data Packet Format	EEh	Unpacketed	10-97
Stop Bit Select	9Dh	1	10-97
Intercharacter Delay	6Eh	0	10-98
Host Serial Response Time-out	9Bh	2 sec	10-98
Host Character Time-out	EFh	200 msec	10-98
Event Reporting			
Decode Event	F0h 00h	Disable	10-99
Boot Up Event	F0h 02h	Disable	10-100
Parameter Event	F0h 03h	Disable	10-100
Macro PDF (MS2204, MS2204VHD, and MS3204 only)			
Transmit Each Symbol in Codeword Format	Afh	Disable	10-101
Transmit Unknown Codewords	BAh	Disable	10-102
Escape Character	E9h	None	10-103
ECI (Symbol MS2204, MS2204VHD and MS3204 only)			
Delete Character Set ECIs	E6h	Enable	10-104
ECI Decoder	E8h	Enable	10-105
Transmit Macro PDF User-Selected Field (Symbol MS2204, MS2204VHD, and MS3204 only)			
Transmit File Name	B0h	Disable	10-106
Transmit Block Count	B1h	Disable	10-107
Transmit Time Stamp	B2h	Disable	10-107
Transmit Sender	B3h	Disable	10-108
Transmit Addressee	B4h	Disable	10-108
Transmit Checksum	B6h	Disable	10-109
Transmit File Size	B5h	Disable	10-109
Transmit Macro PDF Control Header	B7h	Disable	10-110
Last Block Marker	B9h	Disable	10-110

Set Default Parameter

Set Defaults - Symbol MS1204, MS1204VHD, MS3204

Scan this bar code to return all parameters to the values listed in [Table 10-1 on page 10-2](#).



NOTE See [Set Defaults - Symbol MS954 on page 10-9](#) for the Symbol MS954 default parameters.



Set All Defaults

Set Defaults - Symbol MS954

The Symbol MS954 is shipped with the factory default settings shown in [Table 10-1 on page 10-2](#). These factory default values are stored in non-volatile memory and are preserved even when the scan engine is powered down. Changes to the factory default values can be stored as custom defaults. These values are also stored in non-volatile memory and are preserved even when the scanner is powered down.

- Scan the appropriate bar code below to reset the Symbol MS954 to its default settings and/or set the scanner's current settings as the custom default.
- **Restore Defaults** - Scan this bar code to reset all default parameters as follows.
 - If custom defaults were set by scanning **Write to Custom Defaults**, scan **Restore Defaults** to retrieve and restore the scan engine's custom default settings.
 - If no custom defaults were set, scan **Restore Defaults** to restore the factory default values listed in [Table 8-1 on page 8-2](#).
- **Set Factory Defaults** - Scan this bar code to restore the factory default values listed in [Table 8-1 on page 8-2](#). If custom defaults were set, they are eliminated.
- **Write to Custom Defaults** - Scan this bar code to store the current scan engine settings as custom defaults. Once custom default settings are stored, they can be recovered at any time by scanning **Restore Defaults**.



* Restore Defaults



Set Factory Defaults



Write to Custom Defaults

Scanning Options

Beeper Volume

Parameter # 8Ch

To select a decode beep volume, scan the **Low Volume**, **Medium Volume**, or **High Volume** bar code.



Low Volume



Medium Volume




***High Volume**

Beeper Tone

Parameter # 91h


To select a decode beep frequency (tone), scan the appropriate bar code.



Low Frequency
(02h)



Medium Frequency
(01h)



*High Frequency
(00h)

Beeper Frequency Adjustment

Parameter # F0h 91H

This parameter adjusts the frequency of the high beeper tone from the nominal 2500 Hz to another frequency matching the resonances of the installation. It is programmable in 10 Hz increments from 1220 Hz to 3770 Hz.

To increase the frequency, scan the bar code below, then scan three numeric bar codes beginning on [page 10-111](#) that correspond to the desired frequency adjustment divided by 10. For example, to set the frequency to 3000 Hz (an increase of 500 Hz), scan numeric bar codes 0, 5, 0, corresponding to 50, or (500/10).

To decrease the frequency, scan the bar code below, then scan three numeric bar codes beginning on [page 10-111](#) that correspond to the value (256 - desired adjustment/10). For example, to set the frequency to 2000 Hz (a decrease of 500 Hz), scan numeric bar codes 2, 0, 6, corresponding to 206, or (256 - 500/10).



Beeper Frequency Adjustment

Laser On Time

Parameter # 88h

This parameter sets the maximum time decode processing continues during a scan attempt. It is programmable in 0.1 second increments from 0.5 to 9.9 seconds.

To set a Laser On Time, scan the bar code below. Next scan two numeric bar codes beginning on [page 10-111](#) that correspond to the desired on time. Times less than 1.0 second must have a leading zero. For example, to set an on time of 0.5 seconds, scan the bar code below, then scan the 0 and 5 bar codes. To change the selection or to cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Laser On Time

Scan Angle

Parameter # BFh



NOTE This option is supported by the Symbol MS1204FZY and MS954 only.

This parameter sets the scan angle.



*Default Angle (Wide)
(06h)



Alternate Angle (Narrow)
(05h)

Power Mode

Parameter # 80h

This parameter determines whether or not power remains on after a decode attempt. In Low Power mode, the scanner enters into a low power consumption mode when possible, provided all WAKEUP signals are released. In Continuous On mode, power remains on after each decode attempt.



**Continuous On
(00h)**



***Low Power
(01h)**

Trigger Modes

Parameter # 8Ah

- **Level** - A trigger pull activates the laser and decode processing. The laser remains on and decode processing continues until a trigger release, a valid decode, or the Laser On Time-out is reached.
- **Pulse** - A trigger pull activates the laser and decode processing. The laser remains on and decode processing continues until a valid decode or the Laser On Time-out is reached.
- **Continuous** - The laser is always on and decoding.
- **Blink** - This trigger mode is used for triggerless ScanStand operation. Scanning range is reduced in this mode. This mode is only supported by Symbol MS1204FZY and MS954.
- **Host** - A host command issues the triggering signal. The scanner interprets an actual trigger pull as a Level triggering option.



***Level**
(00h)




Pulse
(02h)



Continuous
(04h)



Blink
(07h)



Host
(08h)

Scanning Mode

Parameter # 8Dh

✓ **NOTE** This option is supported by the Symbol MS2204, MS2204VHD and MS3204 only.

Select one of the following scanning modes:

- Smart Raster•Always Raster
- Slab Only Raster•Programmable Raster
- Omnidirectional (Cyclone)•Semi-Omnidirectional

✓ **NOTE** If Omnidirectional is selected, disabling the following parameters is recommended: PDF417, MicroPDF417, DataBar Limited, CC-C, CC-AB, TLC-39 and Linear UPC.



* Smart Raster
(01h)



Always Raster
(02h)



Programmable Raster
(03h)



Slab Pattern
(04h)



Omnidirectional Pattern
(06h)



Semi-Omni Pattern
(07h)

Aiming Mode

Parameter # F0h 7Eh

✓ **NOTE** This option is supported by the Symbol MS1204FZY, MS2204, MS2204VHD and MS3204 only.

For handheld mode only, select an aiming dot to appear for a normal or extended period of time.



***No Aiming Dot
(00h)**



**Aiming Dot
Normal (200 ms) Timeout
(01h)**



**Aiming Dot
Extended (400 ms) Timeout
(02h)**

Programmable Raster Height And Raster Expansion Speed

Parameter # E4h, E5h

✓ **NOTE** This option is supported by the Symbol MS2204, MS2204VHD and MS3204-I000 only.

This parameter selects the laser pattern's height and rate of expansion, and is only used when Programmable Raster or Always Raster is enabled. This parameter is intended for very specific applications, and is usually not necessary.

Select the laser pattern's height and/or rate of expansion.

1. Scan the bar code for either **Raster Height** or **Raster Expansion Speed** below.
2. Scan two numeric bar codes beginning on [page 10-111](#) that represent a two-digit value. Valid values are between 01 and 15.

To change the selection or to cancel an incorrect entry, scan [Cancel on page 10-113](#).



Raster Height (Default 15)



Raster Expansion Speed (Default 11)

Timeout Between Decodes

Timeout Between Decodes, Same Symbol

Parameter # 89h

When in Continuous triggering mode, this parameter sets the minimum duration of not decoding data before the scanner decodes a second bar code identical to one just decoded. This reduces the risk of accidentally scanning the same symbol twice. It is programmable in 0.1 second increments from 0.0 to 9.9 seconds. The recommended interval is 0.6 seconds.

Timeout Between Decodes, Different Symbol

Parameter # 90h

This option sets the minimum duration of not decoding data before the scanner decodes a second (different) bar code. This is used in continuous-on mode to prevent the beeper from beeping when a different symbol appears in the scanner's field of view before the timeout period between decodes expires. This is programmable in 0.1 second increments from 0.0 to 9.9 seconds. The recommended value is 0.0 seconds.

Select the timeouts between decodes for the same or different symbols.

1. Scan the option bar code you wish to set.
2. Scan two numeric bar codes beginning on [page 10-111](#) which correspond to the desired interval, in 0.1 second increments.

To change the selection or to cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Timeout Between Decodes -
Same Symbol




Timeout Between Decodes -
Different Symbols

Beep After Good Decode


Parameter # 38h

Scan this symbol to set the scanner to beep after a good decode.



***Beep After Good Decode
(01h)**

Scan this symbol to set the scanner not to beep after a good decode. The beeper still operates during parameter menu scanning and indicates error conditions.



**Do Not Beep After Good Decode
(00h)**

Transmit "No Read" Message

Parameter # 5Eh

Enable this option to transmit "NR" if a symbol does not decode. Any enabled prefix or suffixes are appended around this message.



**Enable No Read
(01h)**

When the parameter is disabled, and a symbol can not be decoded, no message is sent to the host.



***Disable No Read
(00h)**

Parameter Scanning

Parameter # ECh

To disable the decoding of parameter bar codes, scan the bar code below. The **Set Defaults** parameter bar code can still be decoded. To enable decoding of parameter bar codes, either scan **Enable Parameter Scanning (01h)*, *Set All Defaults* or set this parameter to 01h via a serial command.



***Enable Parameter Scanning
(01h)**



**Disable Parameter Scanning
(00h)**

Linear Code Type Security Level

Parameter # 4Eh

✓ **NOTE** Does not apply to Code 128.

The MiniScan scanner offer four levels of decode security for linear code types (e.g., Code 39, Interleaved 2 of 5). Select higher security levels for decreasing levels of bar code quality. As security levels increase, the scanner's aggressiveness decreases.

Select the security level appropriate for your bar code quality.

Linear Security Level 1

The following code types must be successfully read twice before being decoded:


Code Type	Length
Codabar	All
MSI Plessey	4 or less
D 2 of 5	8 or less
I 2 of 5	8 or less



*Linear Security Level 1
(01h)

Linear Security Level 2

All code types must be successfully read twice before being decoded.




*Linear Security Level 2
(02h)

Linear Security Level 3

Code types other than the following must be successfully read twice before being decoded. The following codes must be read three times:


Code Type	Length
MSI Plessey	4 or less
D 2 of 5	8 or less
I 2 of 5	8 or less



**Linear Security Level 3
(03h)**

Linear Security Level 4

All code types must be successfully read three times before being decoded.



**Linear Security Level 4
(04h)**

Bi-directional Redundancy

Parameter # 43h

This parameter is only valid when a *Linear Code Type Security Level* is enabled (see [page 10-22](#)). When this parameter is enabled, a bar code must be successfully scanned in both directions (forward and reverse) before being decoded.



**Enable Bi-directional Redundancy
(01h)**




***Disable Bi-directional Redundancy
(00h)**

UPC/EAN


Enable/Disable UPC-A

Parameter # 01h

To enable or disable UPC-A, scan the appropriate bar code below.



***Enable UPC-A
(01h)**




**Disable UPC-A
(00h)**


Enable/Disable UPC-E

Parameter # 02h

To enable or disable UPC-E, scan the appropriate bar code below.



***Enable UPC-E
(01h)**



**Disable UPC-E
(00h)**

Enable/Disable UPC-E1

Parameter # 0Ch

To enable or disable UPC-E1, scan the appropriate bar code below.




**Enable UPC-E1
(01h)**




***Disable UPC-E1
(00h)**

Enable/Disable EAN-8**Parameter # 04h**

To enable or disable EAN-8, scan the appropriate bar code below.




***Enable EAN-8
(01h)**




**Disable EAN-8
(00h)**

Enable/Disable EAN-13**Parameter # 03h**

To enable or disable EAN-13, scan the appropriate bar code below.



***Enable EAN-13
(01h)**



**Disable EAN-13
(00h)**

Enable/Disable Bookland EAN

Parameter # 53h

To enable or disable EAN Bookland, scan the appropriate bar code below.



**Enable Bookland EAN
(01h)**



***Disable Bookland EAN
(00h)**

- ✓ **NOTE** If you enable Bookland EAN, select a [Bookland ISBN Format on page 10-42](#). Also select either Decode UPC/EAN Supplementals, Autodiscriminate UPC/EAN Supplementals, or Enable 978/979 Supplemental Mode in [Decode UPC/EAN Supplementals on page 10-30](#).

UPC/EAN Coupon Code

Parameter # 55h

When enabled, this parameter decodes UPC-A bar codes starting with digit '5', EAN-13 bar codes starting with digit '99', and UPC-A/EAN-128 Coupon Codes. UPC-A, EAN-13 and EAN-128 must be enabled to scan all types of Coupon Codes.



**Enable UPC/EAN
Coupon Code**



***Disable UPC/EAN
Coupon Code**



NOTE Use the Decode UPC/EAN Supplemental Redundancy parameter to control autodiscrimination of the EAN-128 (right half) of a coupon code.

Decode UPC/EAN Supplementals

Parameter # 10h

Supplementals are bar codes appended according to specific format conventions (e.g., UPC A+2, UPC E+2, EAN 13+2). The following options are available:

- If you select **Ignore UPC/EAN with Supplementals**, and the scanner is presented with a UPC/EAN plus supplemental symbol, the scanner decodes UPC/EAN and ignores the supplemental characters.
- If you select **Decode UPC/EAN with Supplementals**, the scanner only decodes UPC/EAN symbols with supplemental characters, and ignores symbols without supplementals.
- If you select **Autodiscriminate UPC/EAN Supplementals**, the scanner decodes UPC/EAN symbols with supplemental characters immediately. If the symbol does not have a supplemental, the scanner must decode the bar code the number of times set via [Decode UPC/EAN Supplemental Redundancy on page 10-34](#) before transmitting its data to confirm that there is no supplemental.
- If you select one of the following **Supplemental Mode** options, the scanner immediately transmits EAN-13 bar codes starting with that prefix that have supplemental characters. If the symbol does not have a supplemental, the scanner must decode the bar code the number of times set via [Decode UPC/EAN Supplemental Redundancy on page 10-34](#) before transmitting its data to confirm that there is no supplemental. The scanner transmits UPC/EAN bar codes that do not have that prefix immediately.
 - **Enable 378/379 Supplemental Mode**
 - **Enable 978/979 Supplemental Mode**


✓ **NOTE** If you select 978/979 Supplemental Mode and are scanning Bookland EAN bar codes, see [Enable/Disable Bookland EAN on page 10-28](#) to enable Bookland EAN, and select a format using [Bookland ISBN Format on page 10-42](#).

- **Enable 977 Supplemental Mode**
- **Enable 414/419/434/439 Supplemental Mode**
- **Enable 491 Supplemental Mode**
- **Enable Smart Supplemental Mode** - applies to EAN-13 bar codes starting with any prefix listed previously.
- **Supplemental User-Programmable Type 1** - applies to EAN-13 bar codes starting with a 3-digit user-defined prefix. Set this 3-digit prefix using [User-Programmable Supplementals on page 10-34](#).
- **Supplemental User-Programmable Type 1 and 2** - applies to EAN-13 bar codes starting with either of two 3-digit user-defined prefixes. Set the 3-digit prefixes using [User-Programmable Supplementals on page 10-34](#).
- **Smart Supplemental Plus User-Programmable 1** - applies to EAN-13 bar codes starting with any prefix listed previously or the user-defined prefix set using [User-Programmable Supplementals on page 10-34](#).
- **Smart Supplemental Plus User-Programmable 1 and 2** - applies to EAN-13 bar codes starting with any prefix listed previously or one of the two user-defined prefixes set using [User-Programmable Supplementals on page 10-34](#).


✓ **NOTE** To minimize the risk of invalid data transmission, select either to decode or ignore supplemental characters.

Decode UPC/EAN Supplementals (continued)

Select the desired option by scanning one of the following bar codes.



**Decode UPC/EAN With Supplementals
(01h)**



***Ignore UPC/EAN Supplementals
(00h)**



**Autodiscriminate UPC/EAN Supplementals
(02h)**



**Enable 378/379 Supplemental Mode
(04h)**



**Enable 978/979 Supplemental Mode
(05h)**

Decode UPC/EAN Supplementals (continued)



**Enable 977 Supplemental Mode
(07h)**



**Enable 414/419/434/439 Supplemental Mode
(06h)**



**Enable 491 Supplemental Mode
(08h)**



**Enable Smart Supplemental Mode
(03h)**

Decode UPC/EAN Supplementals (continued)

**Supplemental User-Programmable Type 1
(09h)**



**Supplemental User-Programmable Type 1 and 2
(0Ah)**



**Smart Supplemental Plus User-Programmable 1
(0Bh)**



**Smart Supplemental Plus User-Programmable 1 and 2
(0Ch)**

User-Programmable Supplementals

Supplemental 1: Parameter # F1h 43h

Supplemental 2: Parameter # F1h 44h

If you selected a Supplemental User-Programmable option from *Decode UPC/EAN Supplementals on page 10-30*, select **User-Programmable Supplemental 1** to set the 3-digit prefix. Then select the 3 digits using the numeric bar codes beginning on *page 10-111*. Select **User-Programmable Supplemental 2** to set a second 3-digit prefix. Then select the 3 digits using the numeric bar codes beginning on *page 10-111*.



User-Programmable Supplemental 1



User-Programmable Supplemental 2


Decode UPC/EAN Supplemental Redundancy

Parameter # 50h

With *Autodiscriminate UPC/EAN Supplementals* selected, this option adjusts the number of times (from 2 to 30) a symbol without supplementals is decoded before transmission. Five or above is recommended when decoding a mix of UPC/EAN symbols with and without supplementals, and the autodiscriminate option is selected.

✓ **NOTE** The default supplemental redundancy for Symbol MS954 is 7.


Scan the bar code below to select a decode redundancy value. Next scan two numeric bar codes beginning on *page 10-111*. Enter a leading zero for single digit numbers. To change the selection or to cancel an incorrect entry, scan the *Cancel* bar code on *page 10-113*.




Decode UPC/EAN
Supplemental Redundancy

Transmit UPC-A Check Digit**Parameter # 28h**

Scan the appropriate bar code below to transmit the symbol with or without the UPC-A check digit.




***Transmit UPC-A Check Digit
(01h)**




**Do Not Transmit UPC-A Check Digit
(00h)**

Transmit UPC-E Check Digit**Parameter # 29h**

Scan the appropriate bar code below to transmit the symbol with or without the UPC-E check digit.



***Transmit UPC-E Check Digit
(01h)**



**Do Not Transmit UPC-E Check Digit
(00h)**

Transmit UPC-E1 Check Digit

Parameter # 2Ah

Scan the appropriate bar code below to transmit the symbol with or without the UPC-E1 check digit.



***Transmit UPC-E1 CHECK DIGIT
(01h)**




**Do Not Transmit UPC-E1 Check Digit
(00h)**

UPC-A Preamble

Parameter # 22h

Preamble characters (Country Code and System Character) can be transmitted as part of a UPC-A symbol. Select one of the following options for transmitting UPC-A preamble to the host device: transmit system character only, transmit system character and country code ("0" for USA), or transmit no preamble.



No Preamble
(<DATA>)
(00h)



***System Character**
(<SYSTEM CHARACTER> <DATA>)
(01h)



System Character & Country Code
(< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>)
(02h)

UPC-E Preamble

Parameter # 23h

Preamble characters (Country Code and System Character) can be transmitted as part of a UPC-E symbol. Select one of the following options for transmitting UPC-E preamble to the host device: transmit system character only, transmit system character and country code ("0" for USA), or transmit no preamble.



No Preamble
(<DATA>
(00h)



***System Character**
(<SYSTEM CHARACTER> <DATA>
(01h)



System Character & Country Code
(< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>
(02h)

UPC-E1 Preamble

Parameter # 24h

Preamble characters (Country Code and System Character) can be transmitted as part of a UPC-E1 symbol. Select one of the following options for transmitting UPC-E1 preamble to the host device: transmit system character only, transmit system character and country code ("0" for USA), or transmit no preamble.



No Preamble
(<DATA>)
(00h)



***System Character**
(<SYSTEM CHARACTER> <DATA>)
(01h)



System Character & Country Code
(< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>)
(02h)

Convert UPC-E to UPC-A


Parameter # 25h

This parameter converts UPC-E (zero suppressed) decoded data to UPC-A format before transmission. After conversion, data follows UPC-A format and is affected by UPC-A programming selections (e.g., Preamble, Check Digit).

Scan **DO NOT CONVERT UPC-E TO UPC-A** to transmit UPC-E (zero suppressed) decoded data.



**Convert UPC-E To UPC-A
(Enable)
(01h)**



***Do Not Convert UPC-E To UPC-A
(Disable)
(00h)**

Convert UPC-E1 to UPC-A

Parameter # 26h

Enable this parameter to convert UPC-E1 (zero suppressed) decoded data to UPC-A format before transmission. After conversion, data follows UPC-A format and is affected by UPC-A programming selections (e.g., Preamble, Check Digit).

Scan **DO NOT CONVERT UPC-E TO UPC-A** to transmit UPC-E1 (zero suppressed) decoded data.



**Convert UPC-E1 To UPC-A
(Enable)
(01h)**



***Do Not Convert UPC-E1 To UPC-A
(Disable)
(00h)**

EAN Zero Extend

Parameter # 27h

When this parameter is enabled, five leading zeros are added to decoded EAN-8 symbols to make them compatible in format to EAN-13 symbols.

Disable this parameter to transmit EAN-8 symbols as is.



**Enable EAN Zero Extend
(01h)**



***Disable EAN Zero Extend
(00h)**

Bookland ISBN Format

Parameter # F1h 40h

If you enabled Bookland EAN using [Enable/Disable Bookland EAN on page 10-28](#), select one of the following formats for Bookland data:

- **Bookland ISBN-10** - The scanner reports Bookland data starting with 978 in traditional 10-digit format with the special Bookland check digit for backward-compatibility. Data starting with 979 is not considered Bookland in this mode.
- **Bookland ISBN-13** - The scanner reports Bookland data (starting with either 978 or 979) as EAN-13 in 13-digit format to meet the 2007 ISBN-13 protocol.



***Bookland ISBN-10
(00h)**



**Bookland ISBN-13
(01h)**



NOTE For Bookland EAN to function properly, first enable Bookland EAN using [Enable/Disable Bookland EAN on page 10-28](#), then select either Decode UPC/EAN Supplementals, Autodiscriminate UPC/EAN Supplementals, or Enable 978/979 Supplemental Mode in [Decode UPC/EAN Supplementals on page 10-30](#).


UPC/EAN Security Level

Parameter # 4Dh

The MiniScan scanner offers four levels of decode security for UPC/EAN bar codes. Select higher levels of security for decreasing levels of bar code quality. Increasing security decreases the scanner's aggressiveness, so choose only that level of security necessary for the application.

UPC/EAN Security Level 0

This default setting allows the scanner to operate in its most aggressive state, while providing sufficient security in decoding "in-spec" UPC/EAN bar codes.



***UPC/EAN Security Level 0**
(00h)

UPC/EAN Security Level 1

Select this option if misdecodes occur. This security level eliminates most misdecodes.



UPC/EAN Security Level 1
(01h)

UPC/EAN Security Level 2

Select this option if Security level 1 fails to eliminate misdecodes.



UPC/EAN Security Level 2
(02h)

UPC/EAN Security Level 3

If misdecodes still occur after selecting Security Level 2, select this security level. Be advised, selecting this option is an extreme measure against misdecoding severely out of spec bar codes. Selecting this level of security significantly impairs the decoding ability of the scanner. If this level of security is necessary, try to improve the quality of the bar codes.




UPC/EAN Security Level 3
(03h)


Linear UPC/EAN Decode

Parameter # 44h

This option applies to code types containing two adjacent blocks (e.g., UPC-A, EAN-8, EAN-13). When enabled, a bar code is transmitted only when both the left and right blocks are successfully decoded within one laser scan. Enable this option when bar codes are in proximity to each other.



Enable Linear UPC/EAN Decode
(01h)



***Disable Linear UPC/EAN Decode**
(00h)

UPC Half Block Stitching

Parameter # 4Ah

✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.

This parameter enables UPC Half Block Stitching.



Enable UPC Half Block Stitching
(01h)




***Disable UPC Half Block Stitching**
(00h)

Code 128


Enable/Disable Code 128

Parameter # 08h

To enable or disable Code 128, scan the appropriate bar code below.



***Enable Code 128
(01h)**




**Disable Code 128
(00h)**

Enable/Disable UCC/EAN-128

Parameter # 0Eh

To enable or disable UCC/EAN-128, scan the appropriate bar code below.



***Enable UCC/EAN-128
(01h)**



**Disable UCC/EAN-128
(00h)**

Enable/Disable ISBT 128

Parameter # 54h

To enable or disable ISBT 128, scan the appropriate bar code below.



**Enable ISBT 128
(01h)**



***Disable ISBT 128
(00h)**

Lengths for Code 128

No length setting is required for Code 128.

Code 128 Decode Performance

Parameter # 48h


✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.

This option offers three levels of decode performance or “aggressiveness” for Code 128 symbols. Increasing the performance level reduces the amount of required bar code orientation, which is useful when scanning very long and/or truncated bar codes. Increased levels reduce decode security.

If you enable this option, you can select a Decode Performance level from the next page to suit performance needs.



***Enable Code 128 Decode Performance
(01h)**




**Disable Code 128 Decode Performance
(00h)**

Code 128 Decode Performance Level


Parameter # 49h

✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.


Select a level of decode performance.



Code 128 Decode Performance Level 1
(03h)



Code 128 Decode Performance Level 2
(02h)




*Code 128 Decode Performance Level 3
(01h)

Code 39


Enable/Disable Code 39

Parameter # 00h

To enable or disable Code 39, scan the appropriate bar code below.



***Enable Code 39**
(01h)



Disable Code 39
(00h)

Enable/Disable Trioptic Code 39

Parameter # 0Dh

Trioptic Code 39 is a variant of Code 39 used in marking computer tape cartridges. Trioptic Code 39 symbols always contain six characters. Do not enable Trioptic Code 39 and Code 39 Full ASCII simultaneously.

To enable or disable Trioptic Code 39, scan the appropriate bar code below.



Enable Trioptic Code 39
(01h)



***Disable Trioptic Code 39**
(00h)

Convert Code 39 to Code 32

Parameter # 56h

Code 32 is a variant of Code 39 used by the Italian pharmaceutical industry. Scan the appropriate bar code below to enable or disable converting Code 39 to Code 32.



**Convert Code 39 To Code 32
(Enable)
(01h)**



NOTE Code 39 must be enabled for this parameter to function.



***Do Not Convert Code 39 To Code 32
(Disable)
(00h)**

Code 32 Prefix

Parameter # E7h

Enable this parameter to add the prefix character "A" to all Code 32 bar codes. [Convert Code 39 to Code 32](#) must be enabled for this parameter to function.

✓ **NOTE** Disable Code 32 Prefix is the default for MS954.



***Enable Code 32 Prefix
(01h)**



**Disable Code 32 Prefix
(00h)**

Set Lengths for Code 39

Parameter # L1 = 12h, L2 = 13h


The length of a code refers to the number of characters (i.e., human readable characters), including check digit(s) the code contains. Lengths for Code 39 may be set for any length, one or two discrete lengths, or lengths within a specific range. If Code 39 Full ASCII is enabled, **Length Within a Range** or **Any Length** are the preferred options.

One Discrete Length - This option limits decodes to only those Code 39 symbols containing a selected length. Lengths are selected from the numeric bar codes beginning on [page 10-111](#). For example, to decode only Code 39 symbols with 14 characters, scan **Code 39 - One Discrete Length**, then scan **1** followed by **4**. To change the selection or cancel an incorrect entry, scan the [Cancel](#) bar code on [page 10-113](#).



Code 39 - One Discrete Length

Two Discrete Lengths - This option limits decodes to only those Code 39 symbols containing either of two selected lengths. Lengths are selected from the numeric bar codes beginning on [page 10-111](#). For example, to decode only those Code 39 symbols containing either 2 or 14 characters, select **Code 39 - Two Discrete Lengths**, then scan **0, 2, 1**, and then **4**. To change the selection or cancel an incorrect entry, scan the [Cancel](#) bar code on [page 10-113](#).



Code 39 - Two Discrete Lengths

Length Within Range - This option limits decodes to only those Code 39 symbols within a specified range. The range is selected using the numeric bar codes beginning on [page 10-111](#). For example, to decode Code 39 symbols containing between 4 and 12 characters, first scan **Code 39 Length Within Range**. Then scan **0, 4, 1** and **2** (single digit numbers must always be preceded by a leading zero). To change the selection or cancel an incorrect entry, scan the [Cancel](#) bar code on [page 10-113](#).



***Code 39 - Length Within Range**

Any Length - Scan this option to decode Code 39 symbols containing any number of characters.




Code 39 - Any Length

Code 39 Check Digit Verification

Parameter # 30h

When this feature is enabled, the scanner checks the integrity of all Code 39 symbols to verify that the data complies with specified check digit algorithm. Only those Code 39 symbols which include a modulo 43 check digit are decoded.



Enable Code 39 Check Digit
(01h)



***Disable Code 39 Check Digit**
(00h)

Transmit Code 39 Check Digit

Parameter # 2Bh

Scan this symbol to transmit the check digit with the data.



Transmit Code 39 Check Digit
(Enable)
(01h)

Scan this symbol to transmit data without the check digit.



***Do Not Transmit Code 39 Check Digit**
(Disable)
(00h)

Enable/Disable Code 39 Full ASCII

Parameter # 11h

To enable or disable Code 39 Full ASCII, scan the appropriate bar code below.


When enabled, the ASCII character set assigns a code to letters, punctuation marks, numerals, and most control keystrokes on the keyboard.

The first 32 codes are non-printable and are assigned to keyboard control characters such as BACKSPACE and RETURN. The other 96 are called printable codes because all but SPACE and DELETE produce visible characters.

Code 39 Full ASCII interprets the bar code special character (\$ + % /) preceding a Code 39 character and assigns an ASCII character value to the pair. For example, when Code 39 Full ASCII is enabled and a **+B** is scanned, it is interpreted as **b**, **%J** as **?**, and **\$H** emulates the keystroke **BACKSPACE**. Scanning **ABC\$M** outputs the keystroke equivalent of **ABC ENTER**.


Do not enable Code 39 Full ASCII and Trioptic Code 39 simultaneously.

The scanner does not autodiscriminate between Code 39 and Code 39 Full ASCII.



Enable Code 39 Full ASCII

(01h)



***Disable Code 39 Full ASCII**

(00h)

Code 39 Decode Performance


Parameter # 46h

✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.


This option offers three levels of decode performance or “aggressiveness” for Code 39 symbols. Increasing the performance level reduces the amount of required bar code orientation, which is useful when scanning very long and/or truncated bar codes. Increased levels reduce decode security.

If you enable this option, you can select a Decode Performance level from the next page to suit performance needs.

✓ **NOTE** This option only works with Code 39 One Discrete Length.



***Enable Code 39 Decode Performance
(01h)**




**Disable Code 39 Decode Performance
(00h)**

Code 39 Decode Performance Level


Parameter # 47h

✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.

Select a level of decode performance.



**Code 39 Decode Performance Level 1
(03h)**



**Code 39 Decode Performance Level 2
(02h)**



***Code 39 Decode Performance Level 3
(01h)**

Code 93

Enable/Disable Code 93

Parameter # 09h

To enable or disable Code 93, scan the appropriate bar code below.



**Enable Code 93
(01h)**



***Disable Code 93
(00h)**

Set Lengths for Code 93

Parameter # L1 = 1Ah, L2 = 1Bh

The length of a code refers to the number of characters (i.e., human readable characters), including check digit(s) the code contains. Lengths for Code 93 can be set for any length, one or two discrete lengths, or lengths within a specific range.

One Discrete Length - Select this option to decode only those codes containing a selected length. For example, select **Code 93 One Discrete Length**, then scan **1, 4**, to limit the decoding to only Code 93 symbols containing 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Code 93 - One Discrete Length

Two Discrete Lengths - Select this option to decode only those codes containing two selected lengths. For example, select **Code 93 Two Discrete Lengths**, then scan **0, 2, 1, 4**, to limit the decoding to only Code 93 symbols containing 2 or 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Code 93 - Two Discrete Lengths

Length Within Range - Select this option to decode only those codes within a specified range. For example, to decode Code 93 symbols containing between 4 and 12 characters, first scan **Code 93 Length Within Range**, then scan **0, 4, 1** and **2** (single digit numbers must always be preceded by a leading zero). Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



***Code 93 - Length Within Range**

Any Length - Scan this option to decode Code 93 symbols containing any number of characters.




Code 93 - Any Length

Code 11


Enable/Disable Code 11

Parameter # 0Ah

To enable or disable Code 11, scan the appropriate bar code below.



**Enable Code 11
(01h)**



***Disable Code 11
(00h)**

Set Lengths for Code 11

Parameter # L1 = 1Ch, L2 = 1Dh

The length of a code refers to the number of characters (i.e., human readable characters), including check digit(s) the code contains. Lengths for Code 11 can be set for any length, one or two discrete lengths, or lengths within a specific range.

One Discrete Length - Select this option to decode only those codes containing a selected length. For example, select **Code 11 One Discrete Length**, then scan **1, 4**, to limit the decoding to only Code 11 symbols containing 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Code 11 - One Discrete Length

Two Discrete Lengths - Select this option to decode only those codes containing two selected lengths. For example, select **Code 11 Two Discrete Lengths**, then scan **0, 2, 1, 4**, to limit the decoding to only Code 11 symbols containing 2 or 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Code 11 - Two Discrete Lengths

Length Within Range - Select this option to decode only those codes within a specified range. For example, to decode Code 11 symbols containing between 4 and 12 characters, first scan **Code 11 Length Within Range**, then scan **0, 4, 1** and **2** (single digit numbers must always be preceded by a leading zero). Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



***Code 11 - Length Within Range**

Any Length - Scan this option to decode Code 11 symbols containing any number of characters.




Code 11 - Any Length

Code 11 Check Digit Verification

Parameter # 34h

When enabled, this parameter checks the integrity of a Code 11 symbol to ensure it complies with a specified check digit algorithm. Select either to check for one check digit, check for two check digits, or to disable the feature.



***Disable
(00h)**



**One Check Digit
(01h)**




**Two Check Digits
(02h)**

Transmit Code 11 Check Digit


Parameter # 2Fh

Scan this symbol to transmit the check digit with the data.



**Transmit Code 11 Check Digit
(Enable)
(01h)**

Scan this symbol to transmit data without the check digit.



***Do Not Transmit Code 11 Check Digit
(Disable)
(00h)**


Interleaved 2 of 5

Enable/Disable Interleaved 2 of 5


Parameter # 06h

To enable or disable Interleaved 2 of 5, scan the appropriate bar code below.

✓ **NOTE** Enable Interleaved 2 of 5 is the default for MS954.



Enable Interleaved 2 of 5
(01h)



*Disable Interleaved 2 of 5
(00h)

Set Lengths for Interleaved 2 of 5

Parameter # L1 = 16h, L2 = 17h

The length of a code refers to the number of characters (i.e., human readable characters) the code contains, and includes check digits. Lengths for I 2 of 5 can be set for any length, one or two discrete lengths, or lengths within a specific range.

One Discrete Length - Select this option to decode only those codes containing a selected length. For example, select **I 2 of 5 One Discrete Length**, then scan **1, 4**, to decode only I 2 of 5 symbols containing 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



*I 2 of 5 - One Discrete Length

Two Discrete Lengths - Select this option to decode only those codes containing two selected lengths. For example, select **I 2 of 5 Two Discrete Lengths**, then scan **0, 2, 1, 4**, to decode only I 2 of 5 symbols containing 2 or 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



I 2 of 5 - Two Discrete Lengths

Length Within Range - Select this option to decode only codes within a specified range. For example, to decode I 2 of 5 symbols containing between 4 and 12 characters, first scan **I 2 of 5 Length Within Range**, then scan **0, 4, 1** and **2** (single digit numbers must always be preceded by a leading zero). Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



I 2 of 5 - Length Within Range

Any Length - Scan this option to decode I 2 of 5 symbols containing any number of characters.



NOTE Selecting this option can lead to misdecodes for I 2 of 5 codes.



I 2 of 5 - Any Length

I 2 of 5 Check Digit Verification

Parameter # 31h

When enabled, this parameter checks the integrity of an I 2 of 5 symbol to ensure it complies with a specified algorithm, either USS (Uniform Symbology Specification), or OPCC (Optical Product Code Council).



***Disable
(00h)**



**USS Check Digit
(01h)**



**OPCC Check Digit
(02h)**

Transmit I 2 of 5 Check Digit

Parameter # 2Ch

Scan this symbol to transmit the check digit with the data.



**Transmit I 2 of 5 Check Digit
(Enable)
(01h)**

Scan this symbol to transmit data without the check digit.



***Do Not Transmit I 2 of 5 Check Digit
(Disable)
(00h)**

Convert I 2 of 5 to EAN-13

Parameter # 52h

This parameter converts a 14 character I 2 of 5 code into EAN-13, and transmits to the host as EAN-13. To accomplish this, I 2 of 5 must be enabled, one length must be set to 14, and the code must have a leading zero and a valid EAN-13 check digit.



**Convert I 2 of 5 to EAN-13
(Enable)
(01h)**



***Do Not Convert I 2 of 5 to EAN-13
(Disable)
(00h)**

Discrete 2 of 5

Enable/Disable Discrete 2 of 5

Parameter # 05h

To enable or disable Discrete 2 of 5, scan the appropriate bar code below.



Enable Discrete 2 of 5
(01h)



*Disable Discrete 2 of 5
(00h)

Set Lengths for Discrete 2 of 5

Parameter # L1 = 14h, L2 = 15h

The length of a code refers to the number of characters (i.e., human readable characters) the code contains, and includes check digits. Lengths for D 2 of 5 can be set for any length, one or two discrete lengths, or lengths within a specific range.

One Discrete Length - Select this option to decode only those codes containing a selected length. For example, select **D 2 of 5 One Discrete Length**, then scan **1, 4**, to decode only D 2 of 5 symbols containing 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



***D 2 of 5 - One Discrete Length**

Two Discrete Lengths - Select this option to decode only those codes containing two selected lengths. For example, select **D 2 of 5 Two Discrete Lengths**, then scan **0, 2, 1, 4**, to decode only D 2 of 5 symbols containing 2 or 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



D 2 of 5 - Two Discrete Lengths

Length Within Range - Select this option to decode codes within a specified range. For example, to decode D 2 of 5 symbols containing between 4 and 12 characters, first scan **D 2 of 5 Length Within Range**, then scan **0, 4, 1** and **2** (single digit numbers must be preceded by a leading zero). Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



D 2 of 5 - Length Within Range

Any Length - Scan this option to decode D 2 of 5 symbols containing any number of characters.



NOTE Selecting this option can lead to misdecodes for D 2 of 5 codes.



D 2 of 5 - Any Length

Chinese 2 of 5

Enable/Disable Chinese 2 of 5

Parameter # 0xF0 0x98

To enable or disable Chinese 2 of 5, scan the appropriate bar code below.



Enable Chinese 2 of 5
(0x01)



*Disable Chinese 2 of 5
(0x00)




NOTE Chinese 2 of 5 is supported by the MS954 only.

Codabar


Enable/Disable Codabar

Parameter # 07h

To enable or disable Codabar, scan the appropriate bar code below.



**Enable Codabar
(01h)**



***Disable Codabar
(00h)**

Set Lengths for Codabar

Parameter # L1 = 18h, L2 = 19h

The length of a code refers to the number of characters (i.e., human readable characters) the code contains, including start or stop characters. Lengths for Codabar may be set for any length, one or two discrete lengths, or lengths within a specific range.

One Discrete Length - Select this option to decode only those codes containing a selected length. For example, select **Codabar One Discrete Length**, then scan **1, 4**, to decode only Codabar symbols containing 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the **Cancel** bar code on [page 10-113](#).



Codabar - One Discrete Length

Two Discrete Lengths - Select this option to decode only those codes containing two selected lengths. For example, select **Codabar Two Discrete Lengths**, then scan **0, 2, 1, 4**, to decode only Codabar symbols containing 2 or 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the **Cancel** bar code on [page 10-113](#).



Codabar - Two Discrete Lengths

Length Within Range - Select this option to decode a code within a specified range. For example, to decode Codabar symbols containing between 4 and 12 characters, first scan **Codabar Length Within Range**, then scan **0, 4, 1** and **2** (single digit numbers must always be preceded by a leading zero). Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the **Cancel** bar code on [page 10-113](#).



***Codabar - Length Within Range**

Any Length - Scan this option to decode Codabar symbols containing any number of characters.




Codabar - Any Length

CLSI Editing


Parameter # 36h

When enabled, this parameter strips the start and stop characters and inserts a space after the first, fifth, and tenth characters of a 14-character Codabar symbol.

✓ **NOTE** Symbol length does not include start and stop characters.



Enable CLSI Editing
(01h)




*Disable CLSI Editing
(00h)


NOTIS Editing

Parameter # 37h

When enabled, this parameter strips the start and stop characters from decoded Codabar symbol.



Enable NOTIS Editing
(01h)



*Disable NOTIS Editing
(00h)

MSI Plessey

Enable/Disable MSI Plessey

Parameter # 0Bh

To enable or disable MSI Plessey, scan the appropriate bar code below.



**Enable MSI Plessey
(01h)**



***Disable MSI Plessey
(00h)**

Set Lengths for MSI Plessey

Parameter # L1 = 1Eh, L2 = 1Fh

The length of a code refers to the number of characters (i.e., human readable characters) the code contains, and includes check digits. Lengths for MSI Plessey can be set for any length, one or two discrete lengths, or lengths within a specific range.

One Discrete Length - Select this option to decode only those codes containing a selected length. For example, select **MSI Plessey One Discrete Length**, then scan **1, 4**, to decode only MSI Plessey symbols containing 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the **Cancel** bar code on [page 10-113](#).



MSI Plessey - One Discrete Length

Two Discrete Lengths - Select this option to decode only those codes containing two selected lengths. For example, select **MSI Plessey Two Discrete Lengths**, then scan **0, 2, 1, 4**, to decode only MSI Plessey symbols containing 2 or 14 characters. Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the **Cancel** bar code on [page 10-113](#).



MSI Plessey - Two Discrete Lengths

Length Within Range - Select this option to decode codes within a specified range. For example, to decode MSI Plessey symbols containing between 4 and 12 characters, first scan **MSI Plessey Length Within Range**, then scan **0, 4, 1** and **2** (single digit numbers must always be preceded by a leading zero). Numeric bar codes begin on [page 10-111](#). To change the selection or cancel an incorrect entry, scan the **Cancel** bar code on [page 10-113](#).



***MSI Plessey - Length Within Range**

Any Length - Scan this option to decode MSI Plessey symbols containing any number of characters.



NOTE Selecting this option can lead to misdecodes for MSI Plessey codes.



MSI Plessey - Any Length

MSI Plessey Check Digits

Parameter # 32h

These check digits at the end of the bar code verify the integrity of the data. At least one check digit is required. Check digits are not automatically transmitted with the data.



***One MSI Plessey Check Digit
(00h)**

If two check digits is selected, also select an [MSI Plessey Check Digit Algorithm on page 10-76](#).



**Two MSI Plessey Check Digit
(01h)**

Transmit MSI Plessey Check Digit

Parameter # 2Eh

Scan this symbol to transmit the check digit with the data.



**Transmit MSI Plessey Check Digit
(Enable)
(01h)**

Scan this symbol to transmit data without the check digit.



***Do Not Transmit MSI Plessey Check Digit
(Disable)
(00h)**

MSI Plessey Check Digit Algorithm

Parameter # 33h

When the Two MSI Plessey check digits option is selected, an additional verification is required to ensure integrity. Select one of the following algorithms.



**MOD 10/ MOD 11
(00h)**



***MOD 10/ MOD 10
(01h)**

PDF417/MicroPDF417



NOTE These options are supported by the MS2204, MS2204VHD and MS3204 only.

Enable/Disable PDF417

Parameter # 0Fh

To enable or disable PDF417, scan the appropriate bar code below.



**Enable PDF417
(01h)**



**Disable PDF417
(00h)**

Enable/Disable MicroPDF417

Parameter # E3h

To enable or disable MicroPDF417, scan the appropriate bar code below.



**Enable MicroPDF417
(01h)**



***Disable MicroPDF417
(00h)**


MicroPDF Performance

Parameter # F0h 65h

If the scanner is having trouble decoding MicroPDF symbols, select Selective Performance. Note that this can decrease decoding aggressiveness on some symbols.



***Standard Performance for MicroPDF**



Selective Performance for MicroPDF

Code 128 Emulation

Parameter # 7Bh

When this parameter is enabled, the scanner transmits data from certain MicroPDF417 symbols as if it was encoded in Code 128 symbols. Transmit AIM Symbology Identifiers must be enabled for this parameter to work.

If Code 128 Emulation is enabled, these MicroPDF417 symbols are transmitted with one of the following prefixes:

]C1 if the first codeword is 903-907, 912, 914, 915

]C2 if the first codeword is 908 or 909

]C0 if the first codeword is 910 or 911

If disabled, they are transmitted with one of the following prefixes:

]L3 if the first codeword is 903-907, 912, 914, 915

]L4 if the first codeword is 908 or 909

]L5 if the first codeword is 910 or 911

Scan a bar code below to enable or disable Code 128 Emulation.



**Enable Code 128 Emulation
(01h)**




***Disable Code 128 Emulation
(00h)**

GS1 DataBar


GS1 DataBar-14

Parameter # F0h 52h

To enable or disable GS1 DataBar-14, scan the appropriate bar code below.



**Enable GS1 DataBar-14
(01h)**



***Disable GS1 DataBar-14
(00h)**

GS1 DataBar Limited

Parameter # F0h 53h

To enable or disable GS1 DataBar Limited, scan the appropriate bar code below.



**Enable GS1 DataBar Limited
(01h)**



***Disable GS1 DataBar Limited
(00h)**


GS1 DataBar Expanded

Parameter # F0h 54h

To enable or disable GS1 DataBar Expanded, scan the appropriate bar code below.



**Enable GS1 DataBar Expanded
(01h)**



***Disable GS1 DataBar Expanded
(00h)**

Convert GS1 DataBar to UPC/EAN

Parameter # F0h 8Dh

✓ **NOTE** This option is supported by the MS1204FZY only.

This parameter only applies to GS1 DataBar-14 and GS1 DataBar Limited symbols not decoded as part of a Composite symbol. When this conversion is enabled, GS1 DataBar-14 and GS1 DataBar Limited symbols encoding a single zero as the first digit have the leading '010' stripped and the bar code reported as EAN-13.

Bar codes beginning with two or more zeros but not six zeros have the leading '0100' stripped and the bar code reported as UPC-A. The UPC-A Preamble parameter to transmit the system character and country code applies to converted bar codes. Note that neither the system character nor the check digit can be stripped.



**Enable Convert GS1 DataBar to UPC/EAN
(01h)**



***Disable Convert GS1 DataBar to UPC/EAN
(00h)**


Composite

✓ **NOTE** These options are supported by the MS2204, MS2204VHD, and MS3204 only.


Composite CC-C

Parameter # F0h 55h

Scan a bar code below to enable or disable Composite bar codes of type CC-C.



Enable CC-C
(01h)



*Disable CC-C
(00h)

Composite CC-A/B

Parameter # F0h 56h

Scan a bar code below to enable or disable Composite bar codes of type CC-A/B.



Enable CC-A/B
(01h)




*Disable CC-A/B
(00h)

Composite TLC-39

Parameter # F0h 73h

Scan a bar code below to enable or disable Composite bar codes of type TLC-39.



Enable TLC39
(01h)



*Disable TLC39
(00h)

UPC Composite Mode

Parameter # F0h 58h

UPC symbols can be “linked” with a 2D symbol during transmission as if they were one symbol. Three options are offered for these symbols:

- Select **UPC Never Linked** to transmit UPC bar codes regardless of whether a 2D symbol is detected.
- Select **UPC Always Linked** to transmit UPC bar codes and the 2D portion. If 2D is not present, the UPC bar code does not transmit.
- If **Autodiscriminate UPC Composites** is selected, the scanner determines if there is a 2D portion, then transmits the UPC, as well as the 2D portion if present.



**UPC Never Linked
(00h)**



***UPC Always Linked
(01h)**



**Autodiscriminate UPC Composites
(02h)**

Data Options

Transmit Code ID Character

Parameter # 2Dh

A code ID character identifies the code type of a scanned bar code. This can be useful when decoding more than one code type. The code ID character is inserted between the prefix character (if selected) and the decoded symbol.

Select no code ID character, a Symbol Code ID character, or an AIM Code ID character. The Symbol Code ID characters are listed below.

Table 10-2 *Symbol Code ID Characters*

Code Type	Symbol Identifier
UPC-A, UPC-E, UPC-E1, EAN-13, EAN-8	A
Code 39, Code 32	B
Codabar	C
Code 128, ISBT 128	D
Code 93	E
Interleaved 2 of 5	F
Discrete 2 of 5, D 2of 5 IATA	G
Code 11	H
MSI Plessey	J
UCC/EAN 128	K
Bookland EAN	L
Trioptic Code 39	M
Coupon Code	N
GS1 DataBar (all variants)	R
Composite*	T
Scanlet	W

***Note: UPC/EAN Composite is transmitted in two portions, each with a "T" prefix.**

Transmit Code ID Character (continued)



**Symbol Code ID Character
(02h)**



**AIM Code ID Character
(01h)**



***None
(00h)**


Prefix/Suffix Values

Parameter # P = 69h, S1 = 68h, S2 = 6Ah

A prefix and/or one or two suffixes can be appended to scan data for use in data editing. To set a value for a prefix or suffix, scan a four-digit number (i.e., four bar codes; see [Numeric Bar Codes](#) beginning on [page 10-111](#)) that corresponds to that value. See [Table A-1 on page A-1](#) for the four-digit codes.

To change the selection or cancel an incorrect entry, scan the [Cancel](#) bar code on [page 10-113](#).

✓ **NOTE** In order to use Prefix/Suffix values, first set the [Scan Data Transmission Format on page 10-89](#).




Scan Prefix
(07h)



Scan Suffix 1
(06h)



Scan Suffix 2
(08h)



Data Format Cancel

Scan Data Transmission Format

Parameter # EBh

To change the scan data format, scan one of the following eight bar codes corresponding to the desired format.

✓ **NOTE** To set values for the prefix and/or suffix, see [Prefix/Suffix Values on page 10-88](#).



*Data As Is
(00h)



<DATA> <SUFFIX 1>
(01h)



<DATA> <SUFFIX 2>
(02h)



<DATA> <SUFFIX 1> <SUFFIX 2>
(03h)

Scan Data Transmission Format (continued)



<PREFIX> <DATA>
(04h)



<PREFIX> <DATA> <SUFFIX 1>
(05h)



<PREFIX> <DATA> <SUFFIX 2>
(06h)



<PREFIX> <DATA> <SUFFIX 1> <SUFFIX 2>
(07h)

Simple Serial Interface (SSI) Options

Baud Rate

Parameter # 9Ch

Baud rate is the number of bits of data transmitted per second. The scanner's baud rate setting should match the data rate setting of the host device. If not, data may not reach the host device or may reach it in distorted form.



Baud Rate 300
(01h)



Baud Rate 600
(02h)



Baud Rate 1200
(03h)



Baud Rate 2400
(04h)

Baud Rate (continued)



**Baud Rate 4800
(05h)**



***Baud Rate 9600
(06h)**



**Baud Rate 19,200
(07h)**




**38,400
(08h)**

Parity

Parameter # 9Eh


A parity check bit is the most significant bit of each ASCII coded character. Select the parity type according to host device requirements.

If you select **Odd** parity, the parity bit has a value 0 or 1, based on data, to ensure that an odd number of 1 bits is contained in the coded character.




Odd
(00h)

If you select **Even** parity, the parity bit has a value 0 or 1, based on data, to ensure that an even number of 1 bits is contained in the coded character.



Even
(01h)

Select **Mark** parity and the parity bit is always 1.



Mark
(02h)

Select **Space** parity and the parity bit is always 0.



Space
(03h)

If no parity is required, select **None**.



***None**
(04h)

Check Parity

Parameter # 97h

✓ **NOTE** This option is supported by the MS1204FZY, MS2204, MS2204VHD and MS3204 only.

Select whether or not to check the parity of received characters. Select the type of parity through the *Parity* parameter.



***Check Parity
(01h)**



**Do Not Check Parity
(00h)**


Software Handshaking

Parameter # 9Fh

This parameter offers control of the data transmission process in addition to that offered by hardware handshaking. Hardware handshaking is always enabled and cannot be disabled by the user.

Disable ACK/NAK Handshaking

When this option is selected, the decoder neither generates nor expects ACK/NAK handshaking packets.




Disable ACK/NAK

(00h)

Enable ACK/NAK Handshaking

When this option is selected, after transmitting data, the scanner expects either an ACK or NAK response from the host. The scanner also ACKs or NAKs messages from the host.

The scanner waits up to the programmable Host Serial Response Time-out to receive an ACK or NAK. If the scanner does not get a response in this time, it resends its data up to two times before discarding the data and declaring a transmit error.



***Enable ACK/NAK**

(01h)

Host RTS Line State

Parameter # 9Ah

✓ **NOTE** This option is supported by the MS1204FZY, MS2204, MS2204VHD and MS3204 only.

This parameter is used to set the idle state of the Serial Host RTS line.

The SSI Interface is intended to be used with host applications which also implement the SSI protocol. However, the scanner can be used in a "scan-and-transmit" mode to communicate with any standard serial communications software on a host PC (see [Decode Data Packet Format on page 10-97](#)). If transmission errors occur in this mode, the host PC may be asserting hardware handshaking lines which interfere with the SSI protocol. Scan the **HOST: RTS HIGH** bar code to address this problem.



***Host: RTS Low
(00h)**



**Host: RTS High
(01h)**

Decode Data Packet Format

Parameter # EEh

This parameter selects whether decoded data is transmitted in raw format (unpacketed), or transmitted with the packet format as defined by the serial protocol.

If the raw format is chosen, ACK/NAK handshaking is automatically disabled for decode data.



***Send Raw Decode Data**
(00h)



Send Packeted Decode Data
(01h)

Stop Bit Select

Parameter # 9Dh

The stop bit(s) at the end of each transmitted character marks the end of transmission of one character and prepares the receiving (host) device for the next character in the serial data stream. Set the number of stop bits (one or two) to match host device requirements.



***1 Stop Bit**
(01h)




2 Stop Bits
(02h)

Intercharacter Delay

Parameter # 6Eh

The intercharacter delay gives the host system time to service its receiver and perform other tasks between characters. Select the intercharacter delay option matching host requirements. The delay period can range from no delay to 99 msec in 1 msec increments. After scanning the bar code below, scan two bar codes beginning on [page 10-111](#) to set the desired time-out. To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Intercharacter Delay

Host Serial Response Time-out

Parameter # 9Bh

This parameter specifies how long the decoder waits for an ACK or NAK before resending. Also, if the decoder wants to send, and the host has already been granted permission to send, the decoder waits for the designated time-out before declaring an error.

The delay period can range from 0.0 to 9.9 seconds in 0.1 second increments. After scanning the bar code below, scan two numeric bar codes beginning on [page 10-111](#). Time durations of less than 1.0 second require a leading zero. To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Host Serial Response Time-out

Host Character Time-out

Parameter # EFh

This parameter determines the maximum time the decoder waits between characters transmitted by the host before discarding the received data and declaring an error. The time-out is set in 0.01 second increments from 0.01 seconds to 0.99 seconds. After scanning the bar code below, scan two bar codes beginning on [page 10-111](#) to set the desired time-out. To change the selection or cancel an incorrect entry, scan the *Cancel* bar code on [page 10-113](#).



Host Character Time-out

Event Reporting

The host can request the decoder to provide certain information (events) relative to the decoder's behavior. Enable or disable the events listed in [Table 10-3](#) by scanning the appropriate bar codes on the following pages. Parameter number format for these parameters follows those shown in the *Simple Serial Interface (SSI) Programmer's Guide* for parameters numbered 256 or higher.

Table 10-3 *Event Codes*

Event Class	Event	Code Reported
Decode Event	Non parameter decode	01h
Boot Up Event	System power-up	03h
Parameter Event	Parameter entry error	07h
	Parameter stored	08h
	Defaults set (and parameter event is enabled by default)	0Ah
	Number expected	0Fh

Decode Event

Parameter # F0h 00h

When enabled, the scanner sends a message to the host whenever a bar code is successfully decoded. When disabled, no message is sent.



Enable
(01h)



***Disable**
(00h)

Boot Up Event

Parameter # F0h 02h

When enabled, the sends a message a message to the host whenever power is applied. When disabled, no message is sent.



Enable
(01h)



*Disable
(00h)

Parameter Event

Parameter # F0h 03h

When enabled, the scanner sends a message to the host when one of the events specified in [Table 10-3 on page 10-99](#) occurs. When disabled, no message is sent.



Enable
(01h)



*Disable
(00h)

Macro PDF Features



NOTE These options are supported by the MS2204, MS2204VHD and MS3204 only.

Transmit Symbols in Codeword Format

Parameter # Afh

Enable this to transmit each PDF symbol as directly decoded data codewords, whether or not that symbol is part of a macro PDF sequence. Note that data is output as codeword values, not as interpreted data.

“Codeword values” is an ASCII representation of a number from 000 to 928 for each codeword, preceded by an escape character. This escape character is a backslash by default, but you can change this value. For example, the codeword value 005 is sent to the host in the form of \005 for GLIs, and \C005C for ECIs. This output format is based on the AIM USA Uniform Symbology Specification for PDF417 (1994).

All output codewords are exactly 4 characters for GLIs and 6 characters for ECIs. However, there can be non-decodable characters in the PDF symbol, such as a GLI sequence. This special codeword sequence activates a certain kind of interpretation to the encoded data. Non-decodable codewords like GLIs are embedded in the output stream like any other codeword, e.g., \927\001.

Because GLIs are indistinguishable from other codewords in the output data stream, the host must recognize them as GLIs and process their interpretations.

Note that when a macro PDF sequence is transmitted, the last character in the last block of data transmitted is always \922 (if selected). This indicates the end of that macro PDF transmission.

Scan the appropriate bar code to enable or disable this.



Enable Transmit In Codeword Format

(01h)



***Disable Transmit In Codeword Format**

(00h)

Transmit Unknown Codewords

Parameter # BAh

Select **Transmit Unknown Codewords** to use the output codeword format for transmitting any non-GLI or non-macro PDF codeword. Select **Do Not Transmit Unknown Codewords** to sound a decode error beep when an unknown codeword is found.



Transmit Unknown Codewords

(01h)



***Do Not Transmit Unknown Codewords**

(00h)

Escape Characters

Parameter # E9h

This enables the backslash (\) character as an Escape character for systems that can process transmissions containing special data sequences. Scan a bar code below to either format special data (e.g., GLI escapes, MacroPDF417 Control Block optional fields) according to the GLI (Global Label Identifier) protocol or the ECI (Extended Channel Interpretation) protocol, or to disable this parameter.



ECI Protocol
(01h)



GLI Protocol
(02h)



***None**
(00h)

Delete Character Set ECIs

Parameter # E6h

✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.

Select **Delete Character Set ECIs** to delete any escape sequences representing Character Set ECIs (also known as GLIs) from its buffer before transmission. In many receiving systems, Character Set ECIs can be removed without affecting the way data is displayed or processed.

Select **Transmit Character Set ECIs** to transmit data from PDF417 and MicroPDF417 bar codes containing Character Set ECIs, even when the ECI Protocol is disabled.

Scan a bar code to delete or transmit character set ECIs.



Delete Character Set ECIs
(01h)



***Transmit Character Set ECIs**
(00h)

ECI Decoder

Parameter # E8h

✓ **NOTE** This option is supported by the MS2204, MS2204VHD and MS3204 only.

This parameter enables the scanner to interpret any Extended Channel Interpretations (ECIs) that are supported by the scanner firmware. This does not affect symbols not encoded using ECIs. This version of the product supports ECIs 000900 through 000913, used for efficient encoding of Common Data Syntax Format 00-99. If this parameter is disabled, and a symbol is scanned that was encoded using an ECI escape, the scanner transmits the ECI escape followed by the uninterpreted data.

Scan a bar code to enable or disable this option.



***Enable ECI Decoder**
(01h)



Disable ECI Decoder
(00h)

Transmit Macro PDF User-Selected Fields

✓ **NOTE** These options are supported by the MS2204, MS2204VHD and MS3204 only.

Enable or disable each of the following parameters to indicate whether or not to transmit the specified field in subsequently scanned Macro PDF417 symbols. The options cannot be changed in the middle of a Macro PDF set entry. All user-selected fields are prefixed by \923 for GLIs, and \C923C for ECIs. Tags and examples in the following parameters demonstrate GLI protocol, but the ECI tag (\C923C) can be used instead if ECI protocol is enabled.

Transmit File Name

Parameter # B0h

Transmit File Name activates transmission of the file name field. The field character tag is \923\000. For example, the filename MANHOURS.WK1 is sent as: \923\000MANHOURS.WK1.



Enable File Name Transmit
(01h)



***Disable File Name Transmit**
(00h)

Transmit Block Count

Parameter # B1h

Transmit Block Count activates transmission of the block count field. The field character tag is \923\001. For example, the field may be: \923\0011856.



Enable Transmit Block Count

(01h)



***Disable Transmit Block Count**

(00h)

Transmit Time Stamp

Parameter # B2h

Transmit Time Stamp activates transmission of the time stamp field. The field character tag is \923\002. For example, the field may be: \923\0022123443243234.



Enable Transmit Time Stamp

(01h)



***Disable Transmit Time Stamp**

(00h)

Transmit Sender

Parameter # B3h

Transmit Sender activates transmission of the sender field. The field character tag is \923\003. For example, the field may be: \923\003Motorola Holtsville, NY.



Enable Sender Transmit

(01h)



***Disable Sender Transmit**

(00h)

Transmit Addressee

Parameter # B4h

Transmit Addressee activates transmission of the addressee field. The field character tag is \923\004. For example, the field may be: \923\004AIM USA.



Enable Addressee Transmit

(01h)



***Disable Addressee Transmit**

(00h)

Transmit Checksum

Parameter # B6h

Transmit Checksum activates transmission of the checksum field. The field character tag is \923\006. For example, the field may be: \923\00663823.



Enable Checksum Transmit

(01h)



***Disable Checksum Transmit**

(00h)

Transmit File Size

Parameter # B5h

Transmit File Size activates transmission of the file size field. The field character tag is \923\005. For example, the field may be: \923\005179234.



Enable File Size Transmit

(01h)



***Disable File Size Transmit**

(00h)

Transmit Macro PDF Control Header

Parameter # B7h

Transmit Macro PDF Control Header activates transmission of the control header, which contains the segment index and the file ID. For example, the field can be: \92800000\725\120\343. The five digits after the \928 are the segment index (or block index), and \725\120\343 is the file ID.



**Enable Macro PDF Control Header
Transmit**

(01h)



***Disable Macro PDF Control Header
Transmit**

(00h)

Last Blocker Marker

Parameter # B9h

Enable Last Block Marker marks the last block in the set by the codeword \922.



Enable Last Block Marker

(01h)




***Disable Last Block Marker**


(00h)

Numeric Bar Codes

For parameters requiring specific numeric values, scan the appropriately numbered bar code(s).



0




1



2



3



4

Numeric Bar Codes (continued)



5



6



7



8



9

Cancel

To change a selection or cancel an incorrect entry, scan the bar code below.

**Cancel**

Chapter 11 Simple Serial Interface (SSI)

Introduction

MiniScan scanners communicate with a host device using Symbol's Simple Serial Interface (SSI). This interface is only available on Symbol MSXX04 models.

The *Simple Serial Interface (SSI) Programmer's Guide* (p/n 72-40451-xx) and *Simple Serial Interface (SSI) Developer's Guide* (p/n 72-50705-xx) provide general information on SSI, include information on the decoder's hardware signals, and describe the commands. The following SSI information is specific to the MiniScan scanner.

- ✓ **NOTE** MiniScan scanners only support Multipackaging Option 1. See the SSI Programmer's Guide for more information.

Revision String

When the decoder sends the REPLY_REVISION message, the revision string is in the following format:

```
S/W_REVISION <space> BOARD_TYPE <space> ENGINE_CODE <space> PGM_CHKSUM
```

where:

- **S/W_REVISION** is the release name of the software
- **BOARD_TYPE** is *N* for non-flash decoder board, *F* for flash
- **ENGINE_CODE** indicates the type of scanner paired with the decoder
- **PGM_CHKSUM** is the two-byte checksum of the program code.

Table 11-1 lists the codes identifying the MiniScan scanner when using SSI.

Table 11-1 *MiniScan Codes*

Code	Description
07h	MS1204FZY
38h	MS2204
3Eh	MS2204VHD
48h	MS3204-I000
4ch	MS3204-E000
37h	MS954

SSI Commands Not Supported

The following SSI Commands included in the *Simple Serial Interface (SSI) Programmer's Guide* are NOT supported by the MiniScan scanner:

- C4h AIM_OFF
- C5h AIM_ON
- B1h IMAGE_DATA
- F7h IMAGER_MODE
- B4h VIDEO_DATA

Chapter 12 Mounting Templates

Introduction

This chapter provides mounting templates for MiniScan scanners. Copy the page with your MiniScan model's template to aid in mounting.

Symbol MS1204FZY/MS2204/MS2204VHD Mounting Template




Figure 12-1 *Symbol MS1204FZY/MS2204/MS2204VHD Mounting Template*

Symbol MS3204 Mounting Template

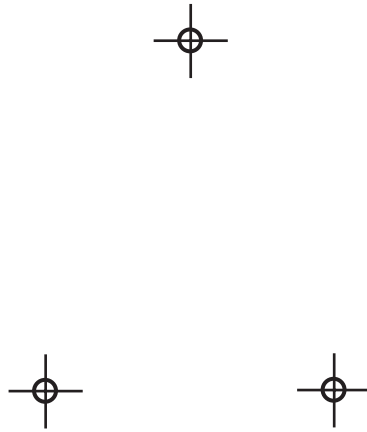


Figure 12-2 *Symbol MS3204 Mounting Template*

Symbol MS954 Mounting Template




Figure 12-3 *Symbol MS954 Mounting Template*

Appendix A ASCII Character Sets

RS-232 ASCII Character Set

The values in [Table A-1](#) can be assigned as prefixes or suffixes for ASCII character data transmission in an RS-232 environment.

Table A-1 *Prefix/Suffix Values*

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1000	%U	NUL
1001	\$A	SOH
1002	\$B	STX
1003	\$C	ETX
1004	\$D	EOT
1005	\$E	ENQ
1006	\$F	ACK
1007	\$G	BELL
1008	\$H	BACKSPACE
1009	\$I	HORIZONTAL TAB
1010	\$J	LF/NEW LINE
1011	\$K	VT
1012	\$L	FF
1013	\$M	CR/ENTER
1014	\$N	SO
1015	\$O	SI

Table A-1 *Prefix/Suffix Values (Continued)*

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1016	\$P	DLE
1017	\$Q	DC1
1018	\$R	DC2
1019	\$S	DC3
1020	\$T	DC4
1021	\$U	NAK
1022	\$V	SYN
1023	\$W	ETB
1024	\$X	CAN
1025	\$Y	EM
1026	\$Z	SUB
1027	%A	ESC
1028	%B	FS
1029	%C	GS
1030	%D	RS
1031	%E	US
1032	Space	Space
1033	/A	!
1034	/B	"
1035	/C	#
1036	/D	\$
1037	/E	%
1038	/F	&
1039	/G	'
1040	/H	(
1041	/I)
1042	/J	*
1043	/K	+
1044	/L	,

Table A-1 *Prefix/Suffix Values (Continued)*

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1045	-	-
1046	.	.
1047	/O	/
1048	0	0
1049	1	1
1050	2	2
1051	3	3
1052	4	4
1053	5	5
1054	6	6
1055	7	7
1056	8	8
1057	9	9
1058	/Z	:
1059	%F	;
1060	%G	<
1061	%H	=
1062	%I	>
1063	%J	?
1064	%V	@
1065	A	A
1066	B	B
1067	C	C
1068	D	D
1069	E	E
1070	F	F
1071	G	G
1072	H	H
1073	I	I

Table A-1 *Prefix/Suffix Values (Continued)*

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1074	J	J
1075	K	K
1076	L	L
1077	M	M
1078	N	N
1079	O	O
1080	P	P
1081	Q	Q
1082	R	R
1083	S	S
1084	T	T
1085	U	U
1086	V	V
1087	W	W
1088	X	X
1089	Y	Y
1090	Z	Z
1091	%K	[
1092	%L	\
1093	%M]
1094	%N	^
1095	%O	_
1096	%W	`
1097	+A	a
1098	+B	b
1099	+C	c
1100	+D	d
1101	+E	e
1102	+F	f

Table A-1 *Prefix/Suffix Values (Continued)*

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1103	+G	g
1104	+H	h
1105	+I	i
1106	+J	j
1107	+K	k
1108	+L	l
1109	+M	m
1110	+N	n
1111	+O	o
1112	+P	p
1113	+Q	q
1114	+R	r
1115	+S	s
1116	+T	t
1117	+U	u
1118	+V	v
1119	+W	w
1120	+X	x
1121	+Y	y
1122	+Z	z
1123	%P	{
1124	%Q	
1125	%R	}
1126	%S	~
1127		Undefined
7013		ENTER

USB ASCII Character Set

The values in [Table A-2](#) can be used for ASCII character data transmission in a USB environment.

Table A-2 USB ASCII Character Set

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
1000	%U	CTRL 2
1001	\$A	CTRL A
1002	\$B	CTRL B
1003	\$C	CTRL C
1004	\$D	CTRL D
1005	\$E	CTRL E
1006	\$F	CTRL F
1007	\$G	CTRL G
1008	\$H	CTRL H / BACKSPACE*
1009	\$I	CTRL I / HORIZONTAL TAB*
1010	\$J	CTRL J
1011	\$K	CTRL K
1012	\$L	CTRL L
1013	\$M	CTRL M / ENTER*
1014	\$N	CTRL N
1015	\$O	CTRL O
1016	\$P	CTRL P
1017	\$Q	CTRL Q
1018	\$R	CTRL R
1019	\$S	CTRL S
1020	\$T	CTRL T
1021	\$U	CTRL U
1022	\$V	CTRL V
1023	\$W	CTRL W

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
1024	\$X	CTRL X
1025	\$Y	CTRL Y
1026	\$Z	CTRL Z
1027	%A	CTRL [/ ESC*
1028	%B	CTRL \
1029	%C	CTRL]
1030	%D	CTRL 6
1031	%E	CTRL -
1032	Space	Space
1033	/A	!
1034	/B	"
1035	/C	#
1036	/D	\$
1037	/E	%
1038	/F	&
1039	/G	'
1040	/H	(
1041	/I)
1042	/J	*
1043	/K	+
1044	/L	,
1045	-	-
1046	.	.
1047	/o	/
1048	0	0
1049	1	1
1050	2	2

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
1051	3	3
1052	4	4
1053	5	5
1054	6	6
1055	7	7
1056	8	8
1057	9	9
1058	/Z	:
1059	%F	;
1060	%G	<
1061	%H	=
1062	%I	>
1063	%J	?
1064	%V	@
1065	A	A
1066	B	B
1067	C	C
1068	D	D
1069	E	E
1070	F	F
1071	G	G
1072	H	H
1073	I	I
1074	J	J
1075	K	K
1076	L	L
1077	M	M

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
1078	N	N
1079	O	O
1080	P	P
1081	Q	Q
1082	R	R
1083	S	S
1084	T	T
1085	U	U
1086	V	V
1087	W	W
1088	X	X
1089	Y	Y
1090	Z	Z
1091	%K	[
1092	%L	\
1093	%M]
1094	%N	^
1095	%O	_
1096	%W	`
1097	+A	a
1098	+B	b
1099	+C	c
1100	+D	d
1101	+E	e
1102	+F	f
1103	+G	g
1104	+H	h

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
1105	+I	i
1106	+J	j
1107	+K	k
1108	+L	l
1109	+M	m
1110	+N	n
1111	+O	o
1112	+P	p
1113	+Q	q
1114	+R	r
1115	+S	s
1116	+T	t
1117	+U	u
1118	+V	v
1119	+W	w
1120	+X	x
1121	+Y	y
1122	+Z	z
1123	%P	{
1124	%Q	
1125	%R	}
1126	%S	~
ALT Keys	Keystroke	
2064	ALT 2	
2065	ALT A	
2066	ALT B	
2067	ALT C	

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
2068	ALT D	
2069	ALT E	
2070	ALT F	
2071	ALT G	
2072	ALT H	
2073	ALT I	
2074	ALT J	
2075	ALT K	
2076	ALT L	
2077	ALT M	
2078	ALT N	
2079	ALT O	
2080	ALT P	
2081	ALT Q	
2082	ALT R	
2083	ALT S	
2084	ALT T	
2085	ALT U	
2086	ALT V	
2087	ALT W	
2088	ALT X	
2089	ALT Y	
2090	ALT Z	

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
Other Value		Keystroke
GUI Shift Keys		
The Apple™ iMac keyboard has an apple key on either side of the space bar. Windows-based systems have a GUI key to the left of the left ALT key, and to the right of the right ALT key.		
3000		Right Control Key
3048		GUI 0
3049		GUI 1
3050		GUI 2
3051		GUI 3
3052		GUI 4
3053		GUI 5
3054		GUI 6
3055		GUI 7
3056		GUI 8
3057		GUI 9
3065		GUI A
3066		GUI B
3067		GUI C
3068		GUI D
3069		GUI E
3070		GUI F
3071		GUI G
3072		GUI H
3073		GUI I
3074		GUI J
3075		GUI K
3076		GUI L
3077		GUI M

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
3078	GUI N	
3079	GUI O	
3080	GUI P	
3081	GUI Q	
3082	GUI R	
3083	GUI S	
3084	GUI T	
3085	GUI U	
3086	GUI V	
3087	GUI W	
3088	GUI X	
3089	GUI Y	
3090	GUI Z	
F Keys	Keystroke	
5001	F1	
5002	F2	
5003	F3	
5004	F4	
5005	F5	
5006	F6	
5007	F7	
5008	F8	
5009	F9	
5010	F10	
5011	F11	
5012	F12	
5013	F13	

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
5014	F14	
5015	F15	
5016	F16	
5017	F17	
5018	F18	
5019	F19	
5020	F20	
5021	F21	
5022	F22	
5023	F23	
5024	F24	
Keypad	Keystroke	
6042	*	
6043	+	
6044	undefined	
6045	-	
6046	.	
6047	/	
6048	0	
6049	1	
6050	2	
6051	3	
6052	4	
6053	5	
6054	6	
6055	7	
6056	8	

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Table A-2 USB ASCII Character Set (Continued)

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.	Keystroke
6057	9	
6058	Enter	
6059	Num Lock	
Extended Keypad	Keystroke	
7001	Break	
7002	Delete	
7003	PgUp	
7004	End	
7005	Pg Dn	
7006	Pause	
7007	Scroll Lock	
7008	Backspace	
7009	Tab	
7010	Print Screen	
7011	Insert	
7012	Home	
7013	Enter	
7014	Escape	
7015	Up Arrow	
7016	Down Arrow	
7017	Left Arrow	
7018	Right Arrow	

***The keystroke in bold is sent only if Function Key Mapping is enabled.**

Glossary

A

AIM. Automatic Identification Manufacturers, Inc. is the trade association for manufacturers of automatic identification systems.

Alphanumeric. A character set that contains letters, numbers and other characters such as special symbols.

Aperture. The opening in an optical system defined by a lens or baffle that establishes the field of view.

ASCII. American Standard Code for Information Interchange. A 7 bit-plus-parity code representing 128 letters, numerals, punctuation marks and control characters. It is a standard data transmission code in the U.S.

Aspect Ratio. The ratio of symbol height to symbol length in a 2-dimensional symbol.

Autodiscrimination. The ability of an interface controller to determine the code type of a scanned bar code. After this determination is made, the information content is decoded.

Automatic Identification System. The application of various technologies, such as bar code recognition, image recognition, voice recognition and RF/MW transponders, for the purpose of data entry into a data processing system and bypassing the key-entry component of traditional data entry.

B

Background. The area surrounding a printed symbol including the spaces and quiet zones.

Bar. The dark element in a printed bar code symbol.

Bar Code. A pattern of variable-width bars and spaces which represents numeric or alphanumeric data in machine-readable form. The general format of a bar code symbol consists of a leading margin, start character, data or message character, check character (if any), stop character, and trailing margin. Within this framework, each recognizable symbology uses its own unique format. See **Symbology**.

Bar Code Character. A single group of bars and spaces which represent an individual number, letter, punctuation mark or other symbol.

Bar Code Density. The number of characters represented per unit of measurement (e.g., characters per inch).

Bar Code Reader. A device used to read or decode a bar code symbol.

Bar Code Symbol. The combination of symbol characters and features required by a particular symbology, including quiet zones, start and stop characters, data characters, check characters and other auxiliary patterns, that together form a complete scannable entity. See **Symbol**.

Bar Height. The dimension of a bar measured perpendicular to the bar width.

Bar Width. Thickness of a bar measured from the edge closest to the symbol start character to the trailing edge of the same bar.

Baud Rate. A measure of the data flow or number of signaling events occurring per second. When one bit is the standard "event," this is a measure of bits per second (bps). For example, a baud rate of 50 means transmission of 50 bits of data per second.

Bi-directional. Denotes that a machine-readable symbol can be read successfully in two directions – either backwards or forwards. Also identifies a scanner that can operate on a bar code that can be read independent of scanning direction.

Binary. Denotes a numbering system to base 2 in which numbers are expressed as combinations of the digits 0 and 1 with positional weighting based on powers of 2. In computing, these can be represented electrically by 'off' and 'on' respectively or in machine-readable symbols by narrow and wide elements or by the absence or presence of a bar module.

Bit. Binary digit. One bit is the basic unit of binary information. Generally, eight consecutive bits compose one byte of data. The pattern of 0 and 1 values within the byte determines its meaning.

Bits per Second (bps). Bits transmitted or received.

bps. See **Bits Per Second**.

Byte. On an addressable boundary, eight adjacent binary digits (0 and 1) combined in a pattern to represent a specific character or numeric value. Bits are numbered from the right, 0 through 7, with bit 0 the low-order bit. One byte in memory is used to store one ASCII character.

or

A sequential series of bits comprising one character and handled as one unit. Usually encoded in the ASCII format, a byte usually consists of eight bits and represents one alphabetic or special character, two decimal digits or eight binary bits.

C

CDRH. Center for Devices and Radiological Health. A federal agency responsible for regulating laser product safety. This agency specifies various laser operation classes based on power output during operation.

CDRH Class 1. This is the lowest power CDRH laser classification. CDRH Class 1 devices are safe under reasonably foreseeable conditions of operation. Software and other controls to limit exposure to laser light may be required to achieve CDRH Class 1 operation. The CDRH time base for Class 1 devices is 10,000 seconds.

CDRH Class 2. CDRH Class II devices may not emit more than 1 milliwatt average radiant power. Eye protection for CDRH Class II devices is normally afforded by aversion responses, including the blink reflex.

Character. A pattern of bars and spaces which either directly represents data or indicates a control function, such as a number, letter, punctuation mark, or communications control contained in a message.

Character Set. Those characters available for encoding in a particular bar code symbology.

Check Digit. A digit used to verify a correct symbol decode. The scanner inserts the decoded data into an arithmetic formula and checks that the resulting number matches the encoded check digit. Check digits are required for UPC but are optional for other symbologies. Using check digits decreases the chance of substitution errors when a symbol is decoded.

Codabar. A discrete self-checking code with a character set consisting of digits 0 to 9 and six additional characters: (- \$: / , +).

Code. A set of unambiguous rules specifying the way in which data may be represented as numbers and letters used to represent information. See **Number System**.

Code 128. A high density symbology which allows the controller to encode all 128 ASCII characters without adding extra symbol elements.

Code 3 of 9 (Code 39). A versatile and widely used alphanumeric bar code symbology with a set of 43 character types, including all uppercase letters, numerals from 0 to 9 and 7 special characters (- . / + % \$ and space). The code name is derived from the fact that 3 of 9 elements representing a character are wide, while the remaining 6 are narrow.

Code 93. An industrial symbology compatible with Code 39 but offering a full character ASCII set and a higher coding density than Code 39.

Code Length. Number of data characters in a bar code between the start and stop characters, not including those characters.

Codeword. As a symbol character value, this is an intermediate level of coding between source data and the graphical encodation in the symbol.

COM port. Communication port; ports are identified by number, e.g., COM1, COM2.

Concatination. The construction of a string of data from two or more strings by appending each string in succession. The linking or chaining together of separate items of data in a bar code symbol or of the data contained in two or more separate bar code symbols (also referred to as message append and structured append).

Continuous Code. A bar code or symbol in which all spaces within the symbol are parts of characters. There are no intercharacter gaps in a continuous code. The absence of gaps allows for greater information density.

Contrast. The difference in reflectance between the black and white (or bar and space) areas of a symbol.

D

Data Identifier. A specified character or string of characters that defines the intended use of the data element that follows. For the purposes of automatic data capture technologies, data identifier refers to the alphanumeric identifiers as defined in ANSI MH10.8.2, formerly known as ANSI/FACT data identifiers.

Data Matrix. This error correcting, 2-dimensional matrix symbology was originally developed in 1989, and a finalized design was completed in 1995 by International Data Matrix. It's capable of encoding various character sets including strictly numeric data, alphanumeric data and all ISO 646 (ASCII) characters, as well as special character sets. The symbology has both error detection and error correction features. Each Data Matrix symbol consists of data regions, which contain nominally square modules set out in a regular array. A dark module is a binary 1 and a light module is a binary 0. There is no specified minimum or maximum for the X or Y dimension. The data region is surrounded by a finder pattern, a perimeter to the data region that is 1 module wide, which is surrounded by a quiet zone on all four sides of the symbol. Two adjacent sides are solid dark lines used primarily to define physical size, orientation and symbol distortion. The two opposite sides consist of alternating dark and light modules. These are used primarily to define the cell structure but also assist in determining physical size and distortion. There are 2 types of Data Matrix symbologies: ECC 000 - 140 with several available levels of convolutional error correction, and ECC 200, which uses Reed-Solomon error correction. For ISO/IEC JTC 1/SC 31 purposes, only ECC 200 is recommended. The intellectual property rights associated with Data Matrix have been committed to the public domain.

Data Structure. The stipulation of the type of information that is included in a bar code, such as its order and format.

Dead Zone. An area within a scanner's field of view, in which specular reflection may prevent a successful decode.

Decode. To recognize a bar code symbology (e.g., UPC/EAN) and then analyze the content of the specific bar code scanned.

Decode Algorithm. A decoding scheme that converts pulse widths into data representation of the letters or numbers encoded within a bar code symbol.

Decoder. An electronic package that receives the signals from the scanning function, performs the algorithm to interpret the signals into meaningful data and provides the interface to other devices.

Decryption. Decryption is the decoding and unscrambling of received encrypted data. Also see, **Encryption** and **Key**.

Depth of Field. The range between minimum and maximum distances at which a scanner can read a symbol with a certain minimum element width.

Diffuse Reflection. The component of reflected light that emanates in all directions from the reflecting surface.

Discrete 2 of 5. A binary bar code symbology representing each character by a group of five bars, two of which are wide. The location of wide bars in the group determines which character is encoded; spaces are insignificant. Only numeric characters (0 to 9) and START/STOP characters may be encoded.

Discrete Code. A bar code or symbol in which the spaces between characters (intercharacter gaps) are not part of the code.

DRAM. Dynamic random access memory.

E

EAN. European Article Number. This European/International version of the UPC provides its own coding format and symbology standards. Element dimensions are specified metrically. EAN is used primarily in retail.

EAN/UPC. A fixed-length, numeric 13-digit bar code symbol consisting of 30 dark elements and 29 intervening light elements. Each character is represented by 2 bars and 2 spaces over 7 modules. A bar may be comprised of 1, 2, 3 or 4 modules. Each EAN/U.P.C. symbol consists of a leading quiet zone, a start pattern, 7 left-hand data characters, a center bar pattern, 5 right-hand data characters, a Modulo 10 check character, a stop pattern and a trailing quiet zone.

U.P.C. is often considered a 12-digit code. The 13th digit of EAN/U.P.C. symbol is a derived character in the left-most position. In the case of U.P.C., this derived left-most character is a 0.

Element. Generic term for a bar or space.

Encoded Area. Total linear dimension occupied by all characters of a code pattern, including start/stop characters and data.

ENQ (RS-232). ENQ software handshaking is also supported for the data sent to the host.

Error Correction. A reader or decoder's use of mathematical schemes to reconstruct or replace damaged or missing symbol characters to enable the reading of the symbol data.

Error-Correction Characters. Symbol characters used for error correction and detection, calculated automatically from the other symbol characters.

Error-Correction Level. An indicator of the number of characters used in a symbology for error correction. A higher level of error correction allows for correcting greater potential symbol damage.

Error Detection. This occurs when error-correction characters detect that the presence of errors in the symbol exceeds the error correction capacity, and keeps the symbol from being decoded as erroneous data.

Error-Detection Characters. Symbol characters reserved for error detection that are calculated automatically from the other symbol characters.

ESD. Electro-Static Discharge

F

Fixed Beam Bar Code Reader. A scanning device where scanning motion is achieved by moving the object relative to the reader; as opposed to a moving beam reader.

G

GS1 DataBar. Formerly Reduced Space Symbology (RSS): A family of space efficient symbologies developed by UCC.EAN.

Guard Bars. Bars located at both ends and the center of a UPC and EAN symbol to provide reference points for scanning.

H

Horizontal Bar Code. A bar code or symbol with an overall length dimension that is parallel to the horizon, which resembles a picket fence.

Host Computer. A computer that serves other terminals in a network, providing such services as computation, database access, supervisory programs and network control.

Hz. Hertz; A unit of frequency equal to one cycle per second.

I

IEC. International Electrotechnical Commission. This international agency regulates laser safety by specifying various laser operation classes based on power output during operation.

IEC (825) Class 1. This is the lowest power IEC laser classification. IEC Class 1 devices are safe under reasonably foreseeable conditions of operation. Software and other controls to limit exposure to laser light may be required to achieve IEC Class 1 operation. The IEC time base for Class 1 devices is 100 seconds if intentional viewing of laser light is not required in the design or function of the device. The IEC time base for Class 1 devices is 30,000 seconds where intentional viewing of laser light is inherent in the design or function of the device.

Input/Output Ports. I/O ports are primarily dedicated to passing information into or out of the terminal memory. Series 9000 mobile computers include Serial and USB ports.

Intercharacter Gap. The space between two adjacent bar code characters in a discrete code.

Interleaved 2 of 5. A binary bar code symbology representing character pairs in groups of five bars and five interleaved spaces. Interleaving provides for greater information density. The location of wide elements (bar/spaces) within each group determines which characters are encoded. This continuous code type uses no intercharacter spaces. Only numeric (0 to 9) and START/STOP characters may be encoded.

Interleaved Bar Code. A bar code in which characters are paired together, using bars to represent the first character and the intervening spaces to represent the second.

I/O Ports. interface The connection between two devices, defined by common physical characteristics, signal characteristics, and signal meanings. Types of interfaces include RS-232 and PCMCIA.

K

Key. A key is the specific code used by the algorithm to encrypt or decrypt the data. Also see, **Encryption** and **Decrypting**.

L

LASER. Light Amplification by Stimulated Emission of Radiation. The laser is an intense light source. Light from a laser is all the same frequency, unlike the output of an incandescent bulb. Laser light is typically coherent and has a high energy density.

Laser Diode. A gallium-arsenide semiconductor type of laser connected to a power source to generate a laser beam. This laser type is a compact source of coherent light.

Laser Scanner. An optical bar code reading device using a coherent laser light beam as its source of illumination.

LCD. See **Liquid Crystal Display**.

LED Indicator. A semiconductor diode (LED - Light Emitting Diode) used as an indicator, often in digital displays. The semiconductor uses applied voltage to produce light of a certain frequency determined by the semiconductor's particular chemical composition.

Light Emitting Diode. See **LED**.

Liquid Crystal Display (LCD). A display that uses liquid crystal sealed between two glass plates. The crystals are excited by precise electrical charges, causing them to reflect light outside according to their bias. They use little electricity and react relatively quickly. They require external light to reflect their information to the user.

M

Matrix Symbols. A 2-dimensional array of regular polygon shaped cells where the center-to-center distance of adjacent elements is uniform. The arrangement of the cells represents data and/or symbology functions. Matrix symbols may include recognition patterns that do not follow the same rule as the other elements within the symbol (i.e., Data Matrix and Maxicode).

MIL. 1 mil = 1 thousandth of an inch; a unit of measure often used to quantify bar code printing and scanning dimensions.

Misread (Misdecode). A condition which occurs when the data output of a reader or interface controller does not agree with the data encoded within a bar code symbol.

Module. (1) The narrowest nominal width unit of measure in a symbol. In certain symbologies, element widths are specified as multiples of 1 module. Equivalent to X dimension; or (2) a single cell in a matrix symbology used to encode 1 bit of data. In Maxicode, the module shape is a regular hexagon. In Data Matrix, the module shape is nominally square. In PDF417, the module shape is a regular rectangle. In bar code symbologies, the module shape is a regular rectangle.

Module Check Digit or Character. A character within the symbol data field calculated using modular arithmetic that is used for error detection. The calculated character is determined by applying a code algorithm to the data field contents. See **Check Character**.

Moving Beam Bar Code Reader. A device where scanning motion is achieved by mechanically moving the optical geometry.

MRD. Minimum reflectance difference: a formula that is used to determine if there is an adequate difference between absorbed and reflected light.

N

Nanometer. Unit of measure used to define the wavelength of light that is equal to 10^{-9} meter.

Nominal. The exact (or ideal) intended value for a specified parameter. Tolerances are specified as positive and negative deviations from this value.

Nominal Size. Standard size for a bar code symbol. Most UPC/EAN codes are used over a range of magnifications (e.g., from 0.80 to 2.00 of nominal).

Non-Contact Reader/Scanner. Bar code readers requiring no physical contact with the printed symbol.

Non-read. The absence of data at the scanner output after an attempted scan, which is due to no code, defective code, scanner failure or operator error.

O

Omnidirectional. Bar codes read in any orientation relative to the scanner.

Optical Throw. The distance from the scanner face to the closest point at which symbol can be read; also, optical throw is the difference between range and depth of field.

Orientation. The alignment of the symbol's scan path. Two possible orientations are horizontal with vertical bars and spaces (picket fence) and vertical with horizontal bars and spaces (ladder).

Overhead. The fixed number of characters required for start, stop and checking in a given symbol. For example, a symbol requiring a start, stop and 2 check characters contains 4 characters of overhead.

P

Parameter. A variable that can have different values assigned to it.

PDF417. An error correcting 2-dimensional multi-row symbol developed in 1992 by Symbol Technologies, PDF417 symbols are constructed from 4 bars and 4 spaces over 17 modules. The symbol size is from 3 to 90 rows. There is no specified minimum or maximum for X or Y dimension. With at least the recommended minimum level of error correction, the recommended Y dimension is 3X. With less than the minimum recommended level of error correction, the recommended Y dimension is 4X. A quiet zone of 2X is specified on each side of a symbol. Because of delta decode techniques, the symbology is immune from uniform bar width growth. PDF417 supports cross-row scanning. The intellectual property rights associated with PDF417 have been committed to the public domain.

Percent Decode. The average probability that a single scan of a bar code would result in a successful decode. In a well-designed bar code scanning system, that probability should approach near 100%.

Pitch. Rotation of a bar code symbol in an axis parallel to the direction of the bars.

Plessey Code. A pulse-width, modulated bar code commonly used for shelf marking in grocery stores.

Postnet Code. Code developed by the U.S. Postal Service to assist in the automatic sorting of mail.

Print Contrast Signal (PCS). Measurement of the contrast (brightness difference) between the bars and spaces of a symbol. A minimum PCS value is needed for a bar code symbol to be scannable. $PCS = (RL - RD) / RL$, where RL is the reflectance factor of the background and RD the reflectance factor of the dark bars.

Programming Mode. The state in which a scanner is configured for parameter values. See **Scanning Mode**.

Q

Quiet Zone. A clear space, containing no dark marks, which precedes the start character of a bar code symbol and follows the stop character.

QWERTY. A standard keyboard commonly used on North American and some European PC keyboards. "QWERTY" refers to the arrangement of keys on the left side of the third row of keys.

R

Reflectance. Amount of light returned from an illuminated surface.

Resolution. The narrowest element dimension which is distinguished by a particular reading device or printed with a particular device or method.

RS-232. An Electronic Industries Association (EIA) standard that defines the connector, connector pins, and signals used to transfer data serially from one device to another.

S

Scan Area. Area intended to contain a symbol.

Scanner. An electronic device used to scan bar code symbols and produce a digitized pattern that corresponds to the bars and spaces of the symbol. Its three main components are: 1) Light source (laser or photoelectric cell) - illuminates a bar code; 2) Photodetector - registers the difference in reflected light (more light reflected from spaces); 3) Signal conditioning circuit - transforms optical detector output into a digitized bar pattern.

Scanning Mode. The scanner is energized, programmed and ready to read a bar code.

Scanning Sequence. A method of programming or configuring parameters for a bar code reading system by scanning bar code menus.

Self-Checking Code. A symbology that uses a checking algorithm to detect encoding errors within the characters of a bar code symbol.

Skew. Rotation of a bar code symbol on an axis parallel to the symbol's length.

Space. The lighter element of a bar code formed by the background between bars.

Space Width. The thickness of a space measured from the edge closest to the symbol start character to the trailing edge of the same space.

Specular Reflection. The mirror-like direct reflection of light from a surface, which can cause difficulty decoding a bar code.

Stacked Symbol (2-D Symbols). A 2-dimensional (2-D) symbol with sequences of linear (width-coded) data that are stacked one upon another (i.e., PDF417).

Start/Stop Character. A pattern of bars and spaces that provides the scanner with start and stop reading instructions and scanning direction. The start and stop characters are normally to the left and right margins of a horizontal code.

Substrate. A foundation material on which a substance or image is placed.

Symbol. A scannable unit that encodes data within the conventions of a certain symbology, usually including start/stop characters, quiet zones, data characters and check characters.

Symbol Aspect Ratio. The ratio of symbol height to symbol width.

Symbol Density. The number of data characters per unit length; usually expressed as characters per inch (CPI).

Symbol Height. The distance between the outside edges of the quiet zones of the first row and the last row.

Symbol Length. Length of symbol measured from the beginning of the quiet zone (margin) adjacent to the start character to the end of the quiet zone (margin) adjacent to a stop character.

Symbology. The structural rules and conventions for representing data within a particular bar code type (e.g. UPC/EAN, Code 39, PDF417, etc.).

T

Tilt. Rotation of a bar code symbol on an axis perpendicular to the substrate.

Tolerance. Allowable deviation from the nominal bar or space width.

Two-dimensional symbology. A machine-readable symbol which must be examined both vertically and horizontally to read the entire message.

A 2-dimensional (2-D) symbol may be one of two types of machine-readable symbols: a Matrix Symbol or a stacked symbol. 2-D symbols differ from linear bar codes with the ability for high data content, small size, data efficiency and error correction capability.

U

UCC. Uniform Code Council: the organization that administers the U.P.C and other retail standards.

UCC.EAN-128. Code 128 with a Function 1 character in the first position that is the symbology used with the UCC.EAN format for a universal product number (UPN).

UPC. Universal Product Code. A relatively complex numeric symbology. Each character consists of two bars and two spaces, each of which is any of four widths. The standard symbology for retail food packages in the United States.

V

Variable Length Code. A code with a number of encoded characters within a range, as opposed to a code with a fixed number of encoded characters.

Vertical Bar Code. A bar code pattern presented in such orientation that the symbol from start to stop is perpendicular to the horizon. The individual bars are in an array appearing as rungs of a ladder.

Visible Laser Diode (VLD). A solid state device which produces visible laser light.

W

Wand Scanner. A handheld scanning device used as a contact bar code or OCR reader.

Wedge. A device that plugs in between a keyboard and a terminal and allows data to be entered by a keyboard or by various types of scanners.

X

X Dimension. The dimension of the narrowest bar and narrowest space in a bar code.

Y

Y Dimension. The height of the modules in a row of a 2-dimensional (2-D) symbols.

Index

A

accessories	2-16
adding window	2-12
aiming modes	10-16
anti-reflection coaters	2-14
applications	1-3
fixed mount	1-3
OEM	1-3
assembling stand	2-4

B

beeper	
definitions	3-7
beeper definitions	3-7
block diagram	1-3
bracket	
mounting scanner	2-5
bullets	xiv

C

calculating the usable scan length	2-8, 2-9
codewords	10-101
transmit unknown	10-102
conventions	
notational	xiv
conveyor applications	
applications	
conveyor	2-11

D

decode zone	
MS1204FZY	4-7
MS2204	5-8

MS2204VHD	6-8
MS3204	7-8
MS954	8-7
default parameter	
MS1204, MS1204VHD, MS3204	10-8
MS954	10-9
default table	10-2
dimensions	
MS1204	4-6
MS2204	5-6
MS2204VHD	6-6
MS3204	7-6
MS954	8-6

E

ECl	
decoder	10-105
delete character set ECIs	10-104
electrical interface	
MS1204FZY	4-1
MS2204	5-2
MS2204VHD	6-1
MS3204	7-2
MS954	8-2
escape characters	10-103

H

humidity	
MS1204FZY	4-5
MS2204	5-6
MS2204VHD	6-6
MS3204	7-6
MS954	8-5

I

information, service xv
 installation
 connecting MiniScan 2-7
 location 2-8
 mechanical drawing
 MS1204FZY 4-3
 MS2204 5-3
 MS2204VHD 6-3
 MS3204 7-3
 MS954 8-3
 mounting 2-2
 mounting scanner on bracket 2-5
 mounting scanner on stand 2-4
 mounting stand 2-5
 stand 2-4
 interface pin-outs 4-1, 5-1, 6-1, 7-2, 8-2

L

laser class
 MS1204FZY 4-6
 MS2204 5-6
 MS2204VHD 6-6
 MS3204 7-6
 MS954 8-6
 laser driver 3-1, 3-2
 laser power
 MS1204FZY 4-5
 MS2204 5-5
 MS2204VHD 6-5
 MS3204 7-5
 MS954 8-5
 LED
 definitions 3-7

M

macro PDF
 delete character set ECIs 10-104
 ECI decoder 10-105
 escape characters 10-103
 last blocker marker 10-110
 transmit addressee 10-108
 transmit block count 10-107
 transmit checksum 10-109
 transmit file name 10-106
 transmit filesize 10-109
 transmit macro PDF control header 10-110
 transmit sender 10-108
 transmit symbols in codeword format 10-101
 transmit time stamp 10-107
 transmit unknown codewords 10-102

 transmit user-selected fields 10-106
 maintenance 9-1
 mechanical drawing
 MS1204FZY 4-3
 MS2204 5-3
 MS2204VHD 6-3
 MS3204 7-3
 MS954 8-3
 media CD 2-17
 mounting 2-2
 mounting bracket 2-5
 mounting template 12-1, 12-2

N

notational conventions xiv

O

operational parameters 10-2

P

parameters, operational 10-2
 pitch angle
 MS1204FZY 4-5
 MS2204 5-5
 MS2204VHD 6-5
 MS3204 7-5
 MS954 8-5
 power requirements
 MS1204FZY 4-5
 MS2204 5-5
 MS2204VHD 6-5
 MS3204 7-5
 MS954 8-5
 print contrast
 MS1204FZY 4-5
 MS2204 5-5
 MS2204VHD 6-5
 MS3204 7-5
 MS954 8-5
 programming bar codes
 aiming mode 10-16
 beep after good decode 10-19
 beeper tone 10-11
 beeper volume 10-10
 bi-directional redundancy 10-24
 cancel 10-113
 Codabar 10-70
 CLSI editing 10-72
 enable/disable 10-70
 length 10-71
 NOTIS editing 10-72

- Code 11 10-59
 - check digit verification 10-61
 - lengths 10-60
 - transmit check digit 10-62
- Code 128 10-45
 - decode performance 10-47
 - lengths 10-46
 - UCC/EAN-128 10-45
- Code 128 emulation 10-79
- Code 39 10-49
 - check digit verification 10-53
 - Code 39 full ASCII 10-54
 - decode performance 10-55
 - lengths 10-52
 - transmit check digit 10-53
 - Trioptic Code 39 10-49
- Code 93 10-57
 - lengths 10-58
- composite CC-A/B 10-83
- composite CC-C 10-83
- convert GS1 DataBar to UPC/EAN 10-82
- delete character set ECIs 10-104
- Discrete 2 of 5 10-67
 - lengths 10-68
- ECI decoder 10-105
- escape characters 10-103
- event reporting 10-99–10-100
 - boot up event 10-100
 - decode event 10-99
 - parameter event 10-100
- GS1 DataBar 10-80
- GS1 DataBar Expanded 10-81
- GS1 DataBar Limited 10-80
- GS1 DataBar-14 10-80
- Interleaved 2 of 5 10-63
 - check digit verification 10-65
 - convert I 2 of 5 to EAN-13 10-66
 - lengths 10-64
 - transmit check digit 10-66
- ISBT 128
 - enable/disable 10-46
- laser on time 10-12
- last blocker marker 10-110
- linear code type security 10-22–10-23
- linear UPC/EAN decode 10-44
- MicroPDF417 10-77
 - performance 10-78
- MSI plessey 10-73
 - check digit algorithm 10-76
 - check digits 10-75
 - lengths 10-74
 - transmit check digit 10-75
- numeric bar codes 10-111–??
- PDF417 10-77
- power mode 10-13
- prefix/suffix values 10-88
- programmable raster size/expansion 10-17
- scan angle 10-12
- scan data transmission format 10-89
- scanning mode 10-15
- serial parameters
 - baud rate 10-91
 - check parity 10-94
 - data packet format 10-97
 - host RTS line state 10-96
 - host serial response time-out 10-98
 - intercharacter delay 10-98
 - parity 10-93
 - software handshaking 10-95
 - stop bit select 10-97
- set defaults 10-8
- SSI options 10-91
- timeout between decodes 10-18
- transmit addressee 10-108
- transmit block count 10-107
- transmit checksum 10-109
- transmit code ID character 10-86
- transmit file name 10-106
- transmit filesize 10-109
- transmit macro PDF control header 10-110
- transmit macro PDF user-selected fields 10-106
- transmit no read message 10-20, 10-21
- transmit sender 10-108
- transmit symbols in codeword format 10-101
- transmit time stamp 10-107
- transmit unknown codewords 10-102
- trigger modes 10-14
- UPC composite mode 10-85
- UPC half block stitching 10-44
- UPC/EAN 10-25
 - bookland EAN 10-28
 - bookland ISBN format 10-42
 - convert UPC-E to UPC-A 10-40
 - convert UPC-E1 to UPC-A 10-41
 - coupon code 10-29
 - decode supplementals 10-30
 - EAN zero extend 10-41
 - EAN-13 10-27
 - EAN-8 10-27
 - EAN-8 to EAN-13 type 10-43
 - security level 10-43
 - supplemental redundancy 10-34
 - supplementals 10-31
 - UPC-A 10-25
 - UPC-A check digit 10-35
 - UPC-A preamble 10-37
 - UPC-E 10-25
 - UPC-E check digit 10-35

UPC-E preamble	10-38
UPC-E1	10-26
UPC-E1 check digit	10-36
UPC-E1 preamble	10-39
user-programmable supplementals	10-34

S

scan angle	
MS1204FZY	4-5
MS2204	5-5
MS2204VHD	6-5
MS3204	7-5
MS954	8-5
scan patterns	
cyclone omnidirectional	3-4
high density single scan line	3-2
raster	3-2, 3-3
single scan line	3-1
scan rate	
MS1204FZY	4-5
MS2204	5-5
MS2204VHD	6-5
MS3204	7-5
MS954	8-5
scanner pattern	3-1
scanning modes	10-15
scanning tips	3-5
service information	xv
skew, pitch and roll	
MS1204FZY	4-6
MS2204	5-7
MS2204VHD	6-7
MS3204	7-7
MS954	8-6
software development kit	2-17
SSI	
Commands not Supported	11-2
Revision String	11-1
stand	
mounting	2-5
mounting scanner	2-4

T

technical specifications	
MS1204FZY	4-5
MS2204	5-5
MS2204VHD	6-5
MS3204	7-5
MS954	8-5
temperature	
MS120XFZY	4-5
MS2204	5-6

MS2204VHD	6-6
MS3204	7-6
MS954	8-5
theory of operation	
laser driver	3-1, 3-2
power management	3-1, 3-2
triggering	
host	3-5
troubleshooting	9-2

U

usable scan length	2-8, 2-9
--------------------	----------

V

vibration	
MS1204FZY	4-5
MS2204	5-6
MS2204VHD	6-6
MS3204	7-6
MS954	8-5

W

weight	
MS1204FZY	4-6
MS2204	5-6
MS2204VHD	6-6
MS3204	7-6
MS954	8-6
window	
adding	2-12
window coatings	2-14
anti-reflection	2-14
polysiloxane	2-14
window manufacturers	2-14
window material	2-12
acrylic	2-13
CR-39	2-13
glass	2-13
window properties	2-13

Tell Us What You Think...

We'd like to know what you think about this Manual. Please take a moment to fill out this questionnaire and fax this form to: (631) 738-4618, or mail to:

Motorola, Inc.
One Motorola Plaza M/S B-10
Holtsville, NY 11742-1300
Attention: Technical Publications Manager
Advanced Data Capture Division

IMPORTANT: If you need product support, please call the appropriate customer support number provided. Unfortunately, we cannot provide customer support at the fax number above.

Manual Title: _____
(please include revision level)

How familiar were you with this product before using this manual?

Very familiar Slightly familiar Not at all familiar

Did this manual meet your needs? If not, please explain.

What topics need to be added to the index, if applicable?

What topics do you feel need to be better discussed? Please be specific.

What can we do to further improve our manuals?

Thank you for your input—We value your comments.



MOTOROLA

Motorola, Inc.
One Motorola Plaza
Holtsville, New York 11742, USA
1-800-927-9626
<http://www.symbol.com>

MOTOROLA and the Stylized M Logo and Symbol and the Symbol logo are registered in the U.S. Patent and Trademark Office.
All other product or service names are the property of their respective owners.
© Motorola, Inc. 2007



72E-67134-05 Revision A - January 2008

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>