

HTU Nx64

T1 HDSL Network Termination Unit

Product Features


- Single V.35 or V.11 DTE interface
- Nx56 or Nx64 operation for data rates to 1.536 Mbps
- T1 HDSL line interface
- Easy to use front panel keypad for unit configuration and monitoring
- Local and remote loopback capability
- Extensive built-in performance monitoring capabilities
- Built in 511 bit error test function
- Password protection
- V.54 loopback for end-to-end testing
- Industry leading five-year warranty

The ADTRAN HTU Nx64 is an easy to use T1 HDSL network termination unit. The HTU Nx64 provides a digital interface between T1 HDSL and the user's Data Terminal Equipment (DTE). The HTU Nx64 is an ideal solution for such applications as LAN to LAN bridging, Frame Relay circuit termination, and video-conferencing. The HTU Nx64 can be deployed as either a remote unit in operation with an ADTRAN T1 HDSL central office unit (HTU-C) or in a point-to-point configuration with another HTU Nx64 in limited distance campus configuration.


Housed in a compact, durable plastic housing the HTU Nx64 supports data rates from 56 kbps to 1.536 Mbps at Nx56 or Nx64 kbps. The HTU Nx64 provides both a V.35 and a V.11 interface for connection to the end user's DTE equipment.

Configuration, testing, and performance monitoring is accomplished via a user friendly front panel interface. Complete configuration and performance information is available from the front panel keypad and a two-line by 16-character LCD display. The front panel interface can also be used to invoke local and remote loopbacks with or without 511 bit error rate testing. The HTU Nx64 also supports configuration and performance monitoring through a rear panel control port using a VT100 terminal emulation.

Network Connection (Configuration 1)

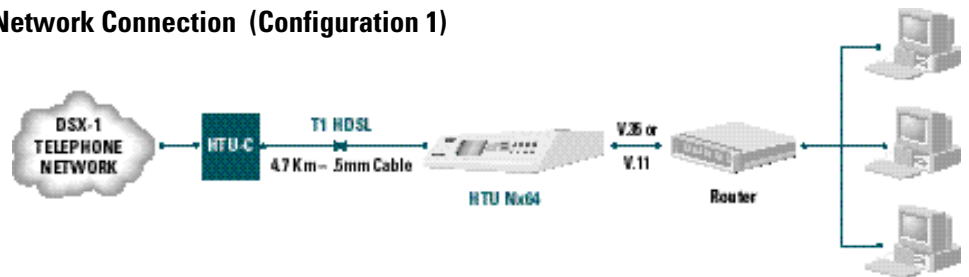

Campus Connection (Configuration 2)

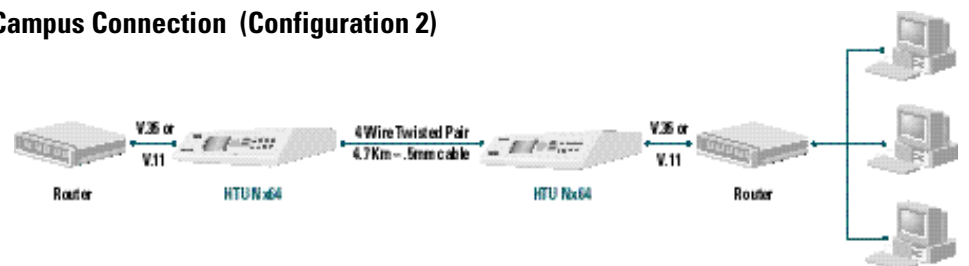



ADTRAN, Inc.
Attention:
International Department
901 Explorer Boulevard
Huntsville, Alabama 35806
USA

www.adtran.com

Asia Pacific—Beijing, China
8610 8857-6415 voice
8610 8857-6417 fax
sales.china@adtran.com

Asia Pacific—Hong Kong
852 2824-8283 voice
852 2824-8928 fax
sales.asia@adtran.com

Asia Pacific—Melbourne,
Australia
61 3 9658-0500 voice
61 3 9658-0599 fax
sales.asia@adtran.com

Canada—Ontario
1 416 290-0585 voice
1 416 296-1259 fax
sales.ontario@adtran.com

Canada—Quebec
1 877 923-8726 toll free
1 514 940-2888 voice
1 514 940-2890 fax
sales.quebec@adtran.com

Canada—Other Provinces
1 877 923-8726 toll free
sales.canada@adtran.com

European Headquarters—
Zürich, Switzerland
41 43 211-6030 voice
41 43 211-6020 fax
sales.europe@adtran.com

Germany
49 6007 930-203 voice
49 6007 930-204 fax
sales.germany@adtran.com

Latin America/Caribbean
1 954 474-4424 voice
1 954 474-1298 fax
sales.latin@adtran.com

Mexico
1 256 963-8240 voice
1 256 963-6300 fax
sales.mexico@adtran.com

Northern Europe/Russia—
London, United Kingdom
44 1252 626-730 voice
44 1252 617-850 fax
sales.northeurope@adtran.com

U.S. Headquarters
1 256 963-8000 voice
1 256 963-6300 fax
1 256 963-8200 fax back
international@adtran.com



ADTRAN is a
ISO 9001 registered company.



ADTRAN is a
TI 9000 registered company.

Printed in the U.S.A.
161245023L1-8B June 2002
©2002 ADTRAN, Inc. All rights reserved.

HTU Nx64

T1 HDSL Network Termination Unit

Product Specifications

Network Interface

Line Rate

- T1 HDSL per Bellcore TA-NWT-001210

LINE Interface

HDSL

- RJ45

Framing

- SF/ESF

ESF Format

- AT&T 54016
- ANSI T1.403

Line Code

- 2B1Q

DSO Assignment

- Contiguous
- Alternating

HDSL Timing

- Network
- Internal
- DTE

DTE Interface

- Bit Rate: 56 kbps to 1.536 Mbps,
Nx56 or Nx64 kbps (N=1 to 24)
- CCITT V.35 (M34F Connector)
- CCITT V.11 (DB15F Connector)

DTE Transmit Clock

- Automatic
- Internal
- External

Performance Monitor Performance Data

- BPVs, ES, SES, UAS, Alarms, Errors at DSX-1 (HTU-C)

Tests

- Local Loopback
- Remote Loopback
- V.54 Loopback
- Built in 511 bit error rate testor

Agency Approvals

- FCC part 15, Class A
- UL 1950 3rd edition

Environment

Operating

- 0 to 50°C (32 to 122°F)

Storage

- -20 to 70°C (-4 to 158°F)

Relative Humidity

- Up to 95%, non-condensing

Physical

Dimensions

- 1.5" H, 9.0" W, 6.25" D

Weight

- 2 lbs

Power

- 90-240 V, 50-60 Hz, 5 W

Protection

- Front panel password protection

Ordering Information

Equipment	Part #
HTU Nx64	1245023L1

Specifications subject to change without notice. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>