

6 V 30 (165 V 30 WOOFER KIT)

6^{1/2} " Polyglass woofer

30th
LIMITED
EDITION

- ◆ High sensitivity
- ◆ Focal's 30th Anniversary




Specifications

Nominal power	80W	
Maximum power	160W	
Sensitivity	92dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 ohms	
DC resistance	3,19 ohms	
VC diameter	25 mm	1 in
VC height	15 mm	0 ^{9/16} in
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0,22mH	
Xmax	5mm	0 ^{3/16} in
Magnet	85 x 17mm	3 ^{1/3} in x 0 ^{2/3} in
Magnet weight	850g	1,7 lb
Flux density	1T	
Gap height	5mm	0 ^{3/16} in
Net weight	1.1g	2.2 lb


Parameters

Fs	72,23Hz	
Vas	8,46 liters	0,3Ft ³
Qts	0,76	
Qes	0,81	
Qms	12,10	
Re	3,19 Ohms	
Sd	132,73cm ²	
Cas	6,02E-8m ⁵ /N	
Mas	80,66Kg/m ⁴	
Ras	3025,19 ohms ac	
Cms	3,42E-4m/N	
Mms	14,21g	0,03lb
Rms	0,533Kg/s	
Ces	559,50mF	
Les	8,68mH	
Res	47,65 ohms	
Bl	5,04 N/A	
SPL	87,79dB	

Frequency Response / Impedance

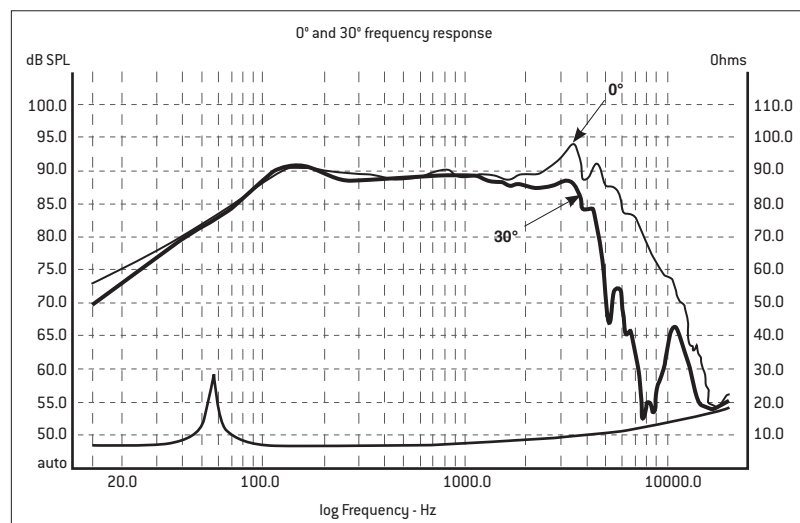

Mechanical Drawing

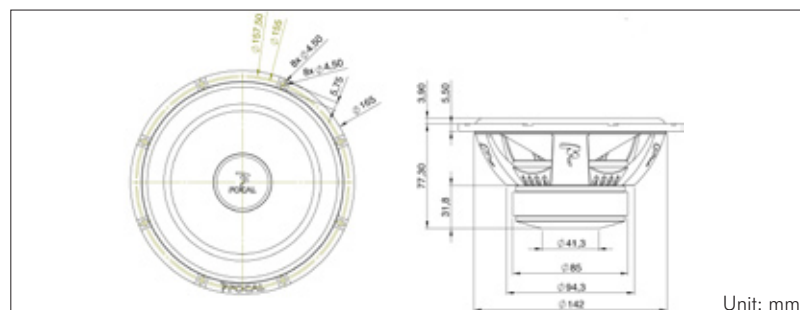

Suggested application

Load	V (l)	Fb (Hz)	F-3 (Hz)	Ql
Sealed	30	-	70	7

Focal® is a trademark of Focal-JMLab® - BP 374 - 108, rue de l'Avenir - 42353 La Talaudière cedex France - Tél. (33) 04 77 43 57 00 - Fax (33) 04 77 37 65 87 - www.focal-fr.com - SCAuB090903/1



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>