




FURUNO

OPERATOR'S MANUAL

*All-in-view, 8-channel parallel reception
GPS NAVIGATOR*

Model **GP-50 MARK-2**



 **FURUNO ELECTRIC CO., LTD.**

No. 9-52, ASHIHARA-CHO,
NISHINOMIYA-CITY, JAPAN

TELEPHONE : 0798-65-2111
CABLE : FURUNO NISHINOMIYA
TELEX : 5644-325/326 FURUNO J
TELEFAX : 0798-65-4200 (G III)

YOUR LOCAL AGENT/DEALER

9505300TA PUB.NO.0ME-43640-E
(9412,TATA) GP-50 MARK-2



TABLE OF CONTENTS

FOREWORD	iii
INTRODUCTION TO GPS	1-1
What is GPS?	1-1
Position-fixing accuracy (HDOP)	1-1
BASIC OPERATION	2-1
Turning the Power On and Off	2-2
What You Will See on the Display	2-4
The Keyboard	2-6
The Menu	2-8
Adjusting LCD Brightness and Contrast	2-9
Initial Settings	2-11
The MOB Key	2-14
Saving Present Position	2-15
Viewing Saved Positions	2-16
WAYPOINT NAVIGATION	3-1
Registering Waypoints	3-1
Viewing the Waypoint List	3-5
Deleting Waypoints	3-6
Selecting a Destination Waypoint	3-7
Canceling the Destination Waypoint	3-8
Destination Waypoint Information	3-9
ROUTE NAVIGATION	4-1
Creating a Route	4-1
Changing a Route	4-5
Following a Route	4-8
MISCELLANEOUS FUNCTIONS	5-1
Calculating Range and Bearing Between Two Points	5-1
Time-To-Go (TTG) Between Two Waypoints	5-2
Displaying Distance Run	5-3
Chart System and Position	5-4
Entering Magnetic Variation	5-6
Changing Unit of Measurement	5-8

TABLE OF CONTENTS

Presetting the NAV Displays 5-9
Smoothing 5-12
Single Menu Mode 5-14
Setting Position Fixing Mode and Elevation Mask 5-16
Differential GPS Mode 5-17

ALARMS **6-1**

Alarm Description 6-1
Arrival and Anchor Watch Alarms 6-3
Cross Track Error and Border Alarms 6-5
Ship's Speed Alarm 6-7
Trip Alarm 6-8

MAINTENANCE & TROUBLESHOOTING **7-1**

Maintenance 7-1
Troubleshooting for the User 7-2
Checking Facilities 7-4
Satellite Information 7-9

APPENDIX **A-1**

Specifications A-1
Menu Tree A-2
Time Differences A-3

INDEX **A-4**

FOREWORD

FURUNO Electric Company thanks you for considering and purchasing the FURUNO GP-50 MARK-2 GPS Navigator. We are confident you will discover why FURUNO has become synonymous with quality and reliability.

For over 40 years FURUNO Electric Company has enjoyed an enviable reputation for quality and reliability throughout the world. This dedication to excellence is furthered by our extensive global network of agents and dealers.

While this unit is designed and manufactured to provide the user with many years of trouble-free performance, no machine can perform its intended functions unless properly installed and maintained. Please carefully read and follow the recommended procedures for operation, installation and maintenance.

NOTICE

- **This unit is capable of performing many complex navigation functions. A function it is not capable of performing however is the role of the navigator. Navigation aids are intended to assist the navigator, not replace him. The navigator should always check the information provided by this unit against other sources to verify its reliability.**
- **This unit is not designed as a permanent data logger. All important data should be recorded in a log.**

Features

The GP-50 MARK-2 consists of two units: a antenna unit and a display unit. The high sensitivity, eight channel receiver tracks up to eight satellites simultaneously. An 8-state Kalman filter ensures optimum accuracy in determination of vessel position, course and speed.

In most cases the operator need do no more than turn on the power to fix GPS receiver position.

- Comprehensive display of navigation data
- Storage for up to 150 waypoints
- Navigation planning from/to waypoint or routes
- Alarm functions – Arrival alarm, Anchor Watch alarm, Cross-track Error alarm, Border alarm, Ship's Speed alarm, Trip alarm
- Man overboard feature records latitude and longitude coordinates at time of man overboard and provides continuous updates of the range and bearing to that point
- Reception of data from DGPS beacon receiver in RS-232C

How to Use this Manual

This manual is laid out in as “user-friendly” a manner as possible. A sophisticated instrument such as this, with its many, many functions can be very intimidating to the first-time user. It is our intention to guide the user along in the use of the equipment as gently and as comfortably as possible in a series of sections that start a very basic level and proceed forward in complexity in a logical manner. This manual is arranged as follows:

Chapter 1 provides an introduction to the GPS system.

Chapter 2 covers basic operations. In most cases all you need to do is turn on the power to find your position.

Chapter 3 explains waypoint navigation. A waypoint is the most basic information required to find information such as range and bearing from your ship to a point.

Chapter 4 provides the information necessary for route navigation. A route is a sequence of waypoints leading to your ultimate destination.

Chapter 5 covers miscellaneous functions.


Chapter 6 describes the alarm functions of the GP-50 MARK-2.

Chapter 7 provides maintenance and troubleshooting information. Whenever you feel your unit is not operating properly, refer to this chapter.

The Appendix contains GP-50 MARK-2 specifications, menu tree, etc.

INTRODUCTION TO GPS


What is GPS?



GPS is an acronym meaning Global Positioning System. GPS (sometimes referred to as NAVSTAR) is a highly precise satellite navigation system developed by the U.S. Department of Defense.

When full global coverage becomes available, a constellation of 24 satellites emplaced in nearly 20,000-kilometer high 12-hour circular orbits will provide highly precise, continuous, world-wide, all-weather position plus time and velocity information to GPS receiver-equipped vehicles, vessels and aircraft.

Figure 1-1 The orbits of GPS satellites

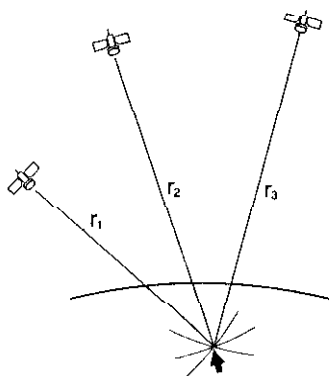

The GPS receiver's position is continuously fixed by receiving 3 (or 4) satellites in line-of-sight of the GPS receiver. The basic steps in position fixing are as below.

1. GPS satellites continually transmit their own precise orbital data called ephemeris. The GPS receiver computes satellites' position by this data.
2. The GPS receiver measures very accurate distance to the satellites.
3. Satellite locations and their distances from the GPS receiver are known. The GPS receiver fixes its own position by triangulation.

Figure 1-2 How the GPS receiver finds its position

Position-fixing accuracy (HDOP)

In radar position-fixing, most accurate position fixes are obtained when the targets used are spaced nearly 90 degrees from each other. Similarly, GPS position fixing accuracy is subject to satellite location. Generally, the further apart the satellites are from one another, the greater the position-fixing accuracy.

For example, take a look at Figure 1-3. In both situations a fix is obtainable in the Northern Pacific region because three satellites are in line-of-sight. However, accuracy will be higher in the right-hand figure since the satellites are spread farther apart than the satellites in the left hand figure.


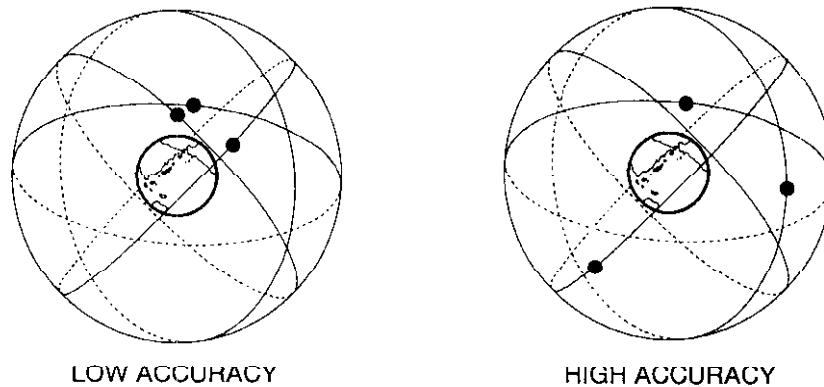


Figure 1-3 Satellite positions and accuracy of position fix

The index for position-fixing accuracy is known as HDOP (Horizontal Dilution of Precision). In simpler terms it is the geometrical relationship among 3 (or 4) satellites. The higher the HDOP value the less accurate the position fix. The error in distance is proportional to the HDOP value as shown in Figure 1-4.

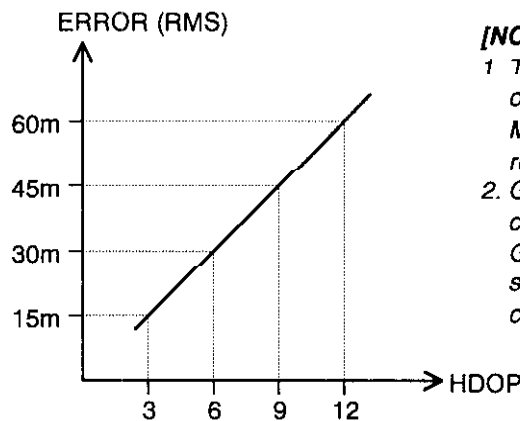

- [NOTE]**
1. The error shown is observed on the GP-50 MARK-2 under favorable receiving conditions.
 2. GPS accuracy is controlled by the US Government. The error shown is subject to change.

Figure 1-4 HDOP rate and position error

■ **NOTE:** In this manual HDOP is referred to as DOP.

BASIC OPERATION

This chapter provides basic operating information, from turning on the power to saving present position.

The first time the GP-50 MARK-2 is turned on it needs about 3 to 10 minutes to fix its position. This is because there is no almanac stored in the unit. Subsequent power applications require less than 45 seconds.



Every satellite is broadcasting its own orbital data plus estimated orbital data about all the GPS satellites. This estimated orbital data is called the **Almanac**.

Before Reading This Manual...

Before you start reading this manual, please familiarize yourself with the typographic conventions we use throughout this manual.

- Key names appear in a font different from the body text for emphasis. For example, the MENU key appears as **MENU** key.
- Two keys are labelled with a symbol rather than a name. In this instance we substitute the symbol for the name in the text. Below is a list of those keys.

Table 2-1 Key symbol and name in text

Key	Referred to in text as;
	Arrow key
	Change key

Turning the Power On and Off

First power

The GP-50 MARK-2 takes about 3 – 10 minutes to fix its position. This is because it contains no almanac when shipped from the factory. The almanac, transmitted by GPS satellites, contains orbit information about all the GPS satellites.

Cold start

The initial receiving of the almanac is called “Cold Start.” To complete the cold start within 10 minutes, the estimated position shown on the display should be within 10°. If it is not, and you want to complete cold start more quickly, refer to the instructions for entering estimated position on page 2-11.

Warm start

Warm start is the normal start-up condition, with the almanac stored in the unit. In this condition it takes about 45 seconds for the receiver to find its position.

Turning on the power

Press the **POWER** switch.

Table 2-2 details the events which occur when turning on the power.

Table 2-2 Sequence of events at power on

Step	Event	Remarks
1	Press the POWER switch.	The buzzer sounds and a colon (:) blinks every second.
2	The indication “CST” (Cold Start) appears on the display.	This step does not occur in normal start-up.
3	About 3 – 10 minutes (cold start condition) after turning on the power, the indication “ACQ” (Acquired) replaces “CST”, meaning the receiver has acquired the almanac.	Warm start begins with the indication ACQ.
4	Shortly after “ACQ” appears it is replaced by “2D” (two-dimensional position fixing).	Ship’s position, speed and course indications are now reliable.

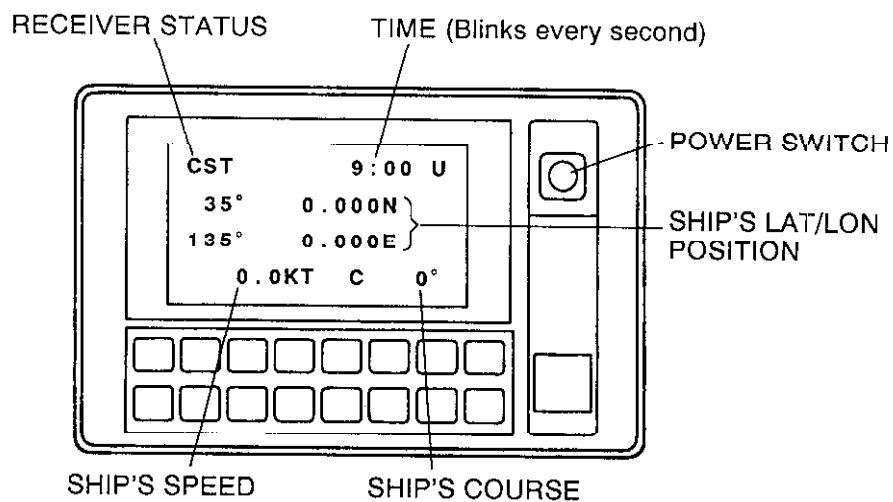


Figure 2-1 Display unit, showing position display (cold start)

Turning off the power

Press the **POWER** switch again. The display turns off.

Notes on operation

- Each time the unit is powered it begins operation with previous settings.
- The unit begins operation with cold start condition when
 - the unit is first powered
 - cold start is executed manually.

What You Will See on the Display

Position display

The position display, an example of which is shown in Figure 2-2, appears when turning on the power. It is the display you probably will be viewing when you are not executing GPS functions. The position display shows

- time (local or UTC)
- position-fixing method
- position in latitude and longitude
- course, and
- speed.

This display also appears by pressing the **POS** key.

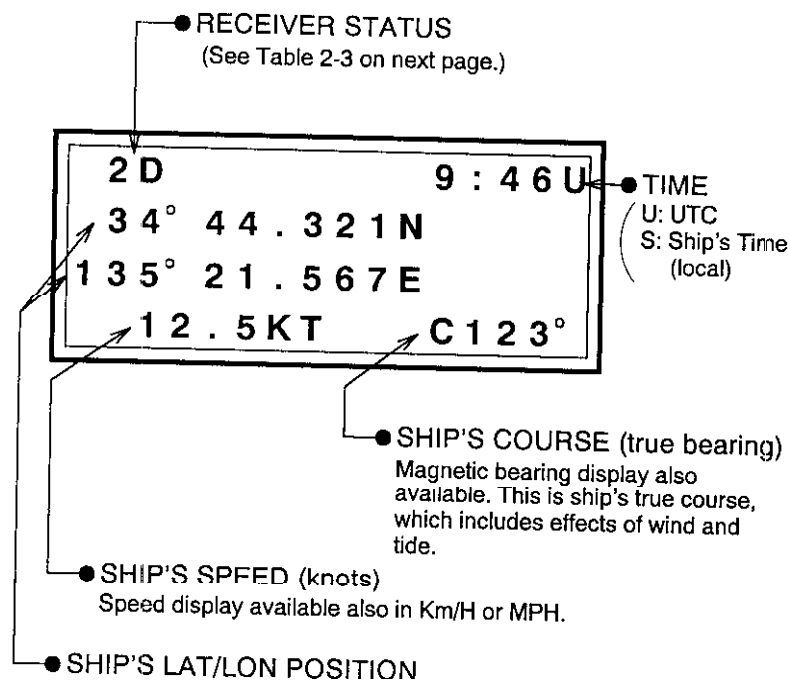


Figure 2-2 Position display

**Abbreviations
(receiver status)**

The GP-50 MARK-2 displays various abbreviations (at the top left on the LCD) which show receiver status. Table 2-3 shows the abbreviations used and their meaning.

Table 2 3 Display abbreviations

Abbreviation	Meaning
CST	Cold Start
ACQ	Acquired; Almanac data acquired
2D	Two dimensional position fixing
IMP	Impossible; no GPS satellite in sight
INT	Interrupted; object interfering with reception of GPS signal
3D	Three dimensional position fixing
D2D	Differential GPS mode

**Symbols
(operating information)**

The display shows six symbols to provide operating information about a particular display. Table 2-4 shows the symbols and their meanings. You will see the symbols in the illustrations which accompany this manual.

Table 2 4 Display symbols and meanings

Symbol	Meaning
:	The blinking colon appears on display screens which are for display only; for example, the default display.
=	The equals sign shows current selection.
— →	The blinking underline, referred to as cursor , prompts you to enter data or select a menu.
→	The right arrow appears to the left of current setting and means you can press the Change key to change setting.
▼	The down arrow means you can press the Arrow key to scroll or change the display.
#	The sharp mark appears to the left of menu number.

The Keyboard

The keyboard consists of 16 keys in two rows. Figure 2-3 shows the keyboard.

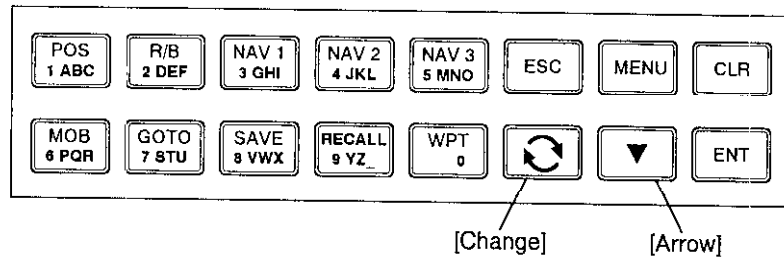




Figure 2-3 Keyboard

Key description

Table 2-5 describes the functions of the keys.

Table 2-5 Key description

Key	Main Function
POS	Displays position, course, speed, time and receiver condition.
R/B	Displays range and bearing between your ship and destination waypoint.
NAV 1 NAV 2 NAV 3	Display navigation information according to user preset.
ESC	Escapes from a function; returns control to default display.
MENU	Displays menu.
CLR	Readies the unit for data input; clears wrong data.
MOB	Executes man overboard feature.
GOTO	Selects destination waypoint.
SAVE	Saves present position.
RECALL	Displays saved positions.
WPT	Registers waypoints.
Change 	Changes items on LCD.
Arrow 	Scrolls display.
ENT	Terminates keyboard input.

Dual function keys

The keys with two rows of labeling have two functions:

- execute the main function associated with the abbreviation which appears on the top line of the key, and
- enter alphanumeric data.

For example, the main function of the **POS 1 ABC** key is to display position information and its sub function is to enter a 1, A, B or C. Hereafter when you are asked to press a dual function key we refer to either the main function or numeral character, depending on the function you are to execute.

Entering data

Numeral

Simply press appropriate numeral key.

Alphabet

Two steps are necessary to enter a letter:

1. Press the numeral key which carries the letter you want to enter.
2. Press the **Change** key to display that letter.

For example, you want to enter the letter F. Press the **2** key, and then press the **Change** key three times.

Clearing wrong data

Press the **CLR** key.

Keyboard response conventions

Each time you press a key (including the power switch) the unit emits up to three beeps according to operation executed. Table 2-6 explains keyboard response.

Table 2-6 Keyboard response conventions

Keyboard Response	Occurrence
One beep	• When turning on the power.
	• Key input accepted.
Two beeps	• Invalid key input.
Beep continuous	• Alarm setting violated.
Three beeps	• MOB key pressed.
	• Route changed.
	• Heading changed on route navigation.
	• Receiver error lasting more than one minute.
	• Error found on self test.

The Menu

The menu contains less-often used functions such as the self test and initial settings. You may display the menu by pressing the **MENU** key. Figure 2-4 shows the menu.

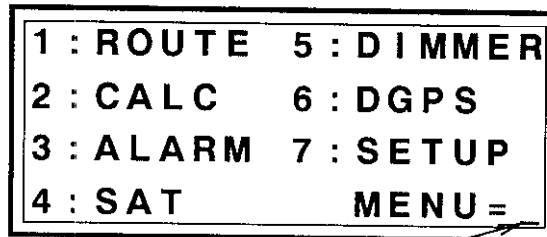


Figure 2-4 Menu

● **BLINKING CURSOR:**
Prompts you to enter menu number.


Menu description

Table 2-7 Menu description

Menu	Function
1: ROUTE	Plan/select route.
2: CALC	Calculate range and bearing to a point.
3: ALARM	Change alarm settings.
4: SAT	Satellite functions.
5: DIMMER	Adjust display brightness (including keyboard backlighting) and LCD contrast.
6: DGPS	Enter initial settings for DGPS mode, monitor the status of DGPS data.
7: SETUP	Enter initial settings, execute self test, etc.

Selecting a menu

To select a menu, press appropriate numeral keys. In most cases you will press several numeral keys before reaching the display where you will enter data. The unit lets you know where you are in a menu by displaying menu number; that is, numeral keys pressed, adjacent to a sharp mark (#). Figure 2-5 illustrates this feature. (Complete menu appears on page A-6.)

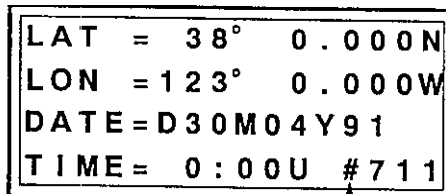

● Numeral keys pressed to display this screen.

Figure 2-5 Estimated lat/lon display, showing location of menu number

Adjusting LCD Brightness and Contrast

You can adjust LCD brightness (including keyboard backlighting) and contrast to suit your needs and environment.

Brightness

To adjust both the brightness of the display and the backlighting of the keyboard;

1. Press the **MENU** key to display the menu.
2. Press the **5** key to display the DIMMER menu.

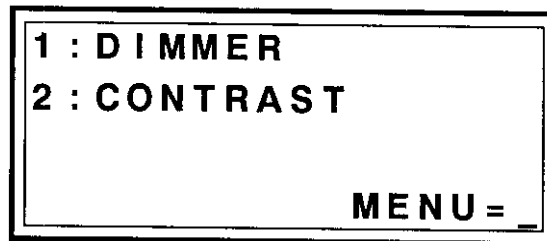


Figure 2-6 DIMMER menu

3. Press the **1** key to select DIMMER. The DIMMER display appears along with current dimmer setting. (6 is the factory setting.)

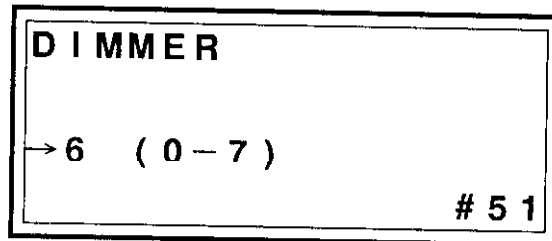


Figure 2-7 DIMMER display

4. Press the **CLR** key. A blinking cursor appears under the dimmer setting. (Hereafter we refer to the blinking cursor as cursor.)
5. Press the **Change** key to select dimmer setting desired; 7 for highest, 0 for lowest.
6. Press the **ENT** key. The cursor disappears. Press any key to escape.

Contrast

The procedure which follows shows how to adjust LCD contrast.

1. Press the **MENU** key to display the menu.
2. Press the **5** key to display the DIMMER menu.
3. Press the **2** key to select CONTRAST. The CONTRAST display appears along with current contrast setting. (4 is the factory setting.)

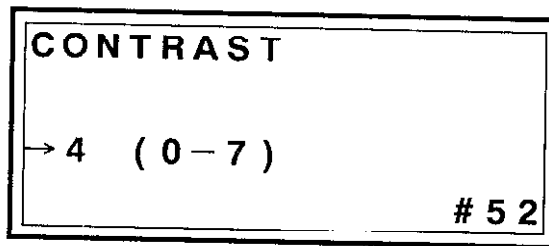


Figure 2-8 CONTRAST display

4. Press the **CLR** key. The cursor appears under the contrast setting.
5. Press the **Change** key to select contrast setting desired; 7 for highest, 0 for lowest.
6. Press the **ENT** key. The cursor disappears. Press any key to escape.

Initial Settings

Estimated position When the latitude and longitude position displayed at power on is wrong by more than 10° (about 600 miles) you can enter estimated position to lessen the time required to execute cold start.

1. Press the **MENU** key.

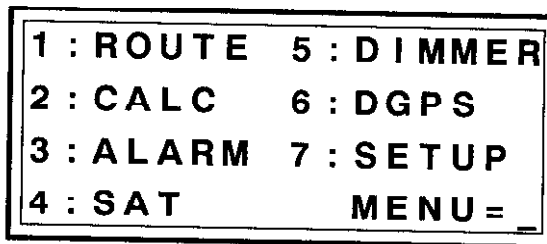


Figure 2-9 Menu

2. Press the **/** key to select the SETUP menu.



Figure 2-10 SETUP menu

3. Press the **1** key to select the INIT(ial) menu.

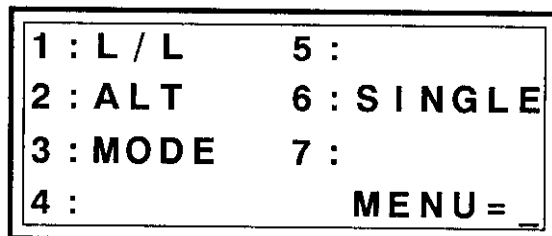


Figure 2-11 INITIAL menu

4. Press the **1** key to select L/L. The L/L display appears.

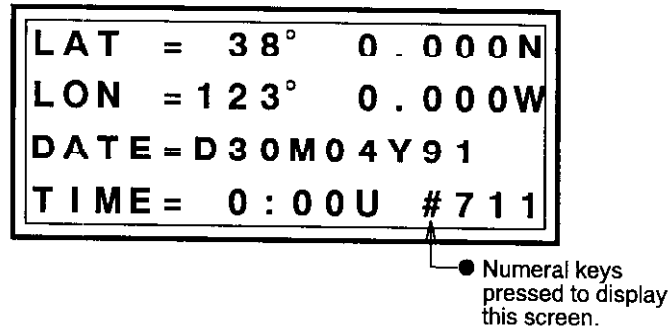


Figure 2-12 L/L display

5. Press the **CLR** key. The cursor appears on the LAT line.

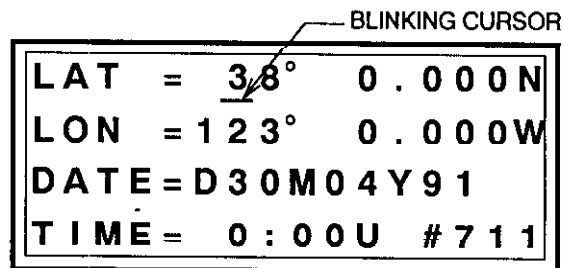


Figure 2-13 L/L display, showing cursor

6. Enter latitude. To enter 34°44'N, for example, press

3 **4** **4** **4**

■ **NOTE:** The **CLR** key clears wrong data. The **Change** key changes North latitude to South latitude, West longitude to East longitude and vice versa.

7. Press **ENT**. The cursor moves to the LON line.

8. Enter longitude. To enter 135°21'E, for example, press

1 **3** **5** **2** **1** **Change**

9. Press the **ENT** key. The cursor shifts to the DATE line. You need not enter the date; when the unit receives a satellite the date, as well as the time, is automatically corrected.

10. Press the **ESC** key. The latitude and longitude you entered appear on the display.

Time difference and antenna unit height

The GPS system uses UTC time. If you would rather display time in local time enter the time difference between UTC and local time. A world map which shows time differences is in the appendix. For time difference earlier than UTC enter a minus sign by pressing the **Change** key.

Accurate input of the antenna unit height above the waterline is essential for accurate determination of position.

1. Press **MENU**, **7** and **2** to display the INITIAL menu.
2. Press the **2** key to display the ALT display.

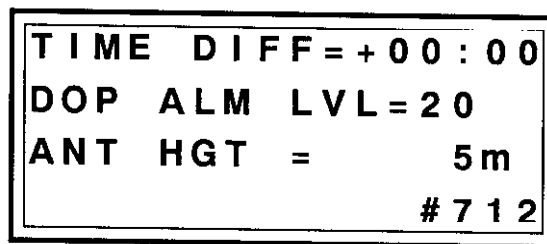


Figure 2-14 ALT display

3. Press the **CLR** key.
4. Enter time difference, if required. To enter a time difference of three hours, for example, press **0** and **3**.
5. Press the **ENT** key twice to advance the cursor to ANTHGT.
6. Enter antenna unit height above the waterline in meters (see note), using four digits. To enter 12 m, for example, press **0,0,1** and **2**.

■ **NOTE:** If the antenna unit is below the waterline, press the **Change** key to display the minus sign. The unit of measurement for antenna unit height can be changed to feet. For further details, see page 5-8.


7. Press the **ENT** key.

■ **NOTE:** The **DOP ALM LVL** setting (set to 20) should not be changed. When the DOP exceeds this setting, the error status is added to the outputting position data.

The MOB Key

The **MOB** (Man OverBoard) key saves ship's position, date and time to mark man overboard. The range and the bearing from present position to that point are continually calculated, so you can easily return there. Figure 2-15 illustrates the man overboard feature.

Press the **MOB** key.

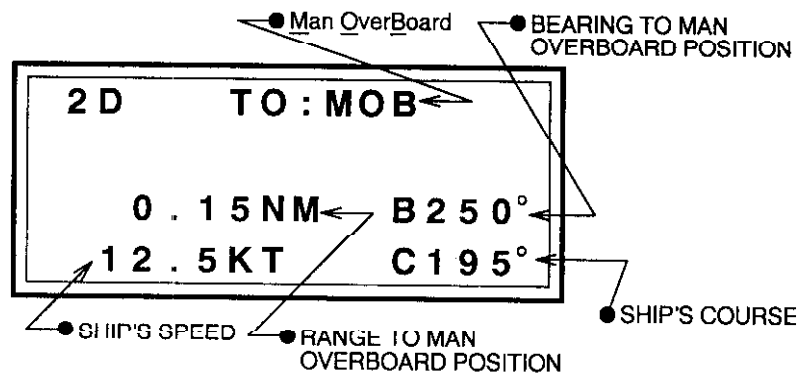

Press **RECALL** key.

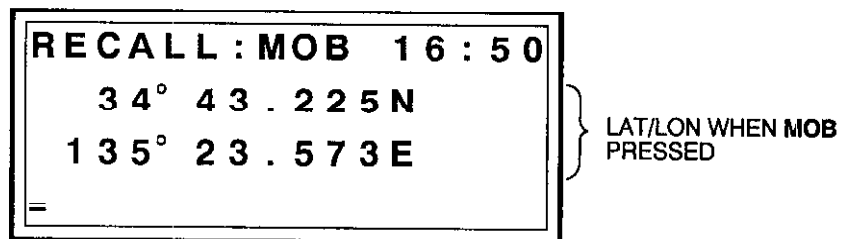


Figure 2-15 Viewing the man overboard feature information

When you want to observe the range and bearing to MOB position again, press the **R/B** key.

■ **NOTE:** If you press the **MOB** key while in this display, the old MOB position data is deleted to make room for new MOB position.

Saving Present Position

There will be times when you will want to save your present location on a temporary basis. (For permanent storage, register position as a waypoint. Waypoints will be dealt with in a later chapter.) For example, you have laid some crab pots, and want to return to the location at a later time.

Storage capacity for saved positions

You can save up to 20 present locations. The unit numbers the locations from S1 to S20. If you try to save more than 20 locations, the earliest locations will be deleted, one at a time, to make room for the latest positions.

Saving present position

Press the **SAVE** key. The moment the key is pressed the position of the vessel is stored in the memory. In Figure 2-16 the display shows the unit saved a location under S1.

```

SAVE : S1      16 : 24
  34° 30 . 125 N
 135°  7 . 234 E
=
  
```


Figure 2-16 SAVE display

Automatic position saving

The GP-50 MARK-2 automatically saves the vessel's position on the hour. It numbers these locations from T1 to T5. You can view the vessel's position on the hour for each of the latest five hours on the RECALL display. The next section shows you how to view both manually and automatically saved positions.


Viewing Saved Positions

You may view both manually and automatically saved positions by pressing the **RECALL** key. The MOB position appears at the initial press of the key. Further pressing of the key shows the most recently manually saved position, other manually saved positions, and automatically saved ones in that order.

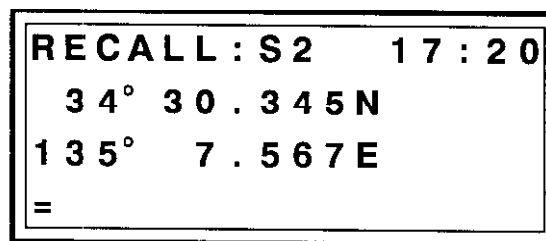

RECALL : S2 17 : 20
34° 30 . 345 N
135° 7 . 567 E
=

Figure 2-17 RECALL display, showing manually saved position

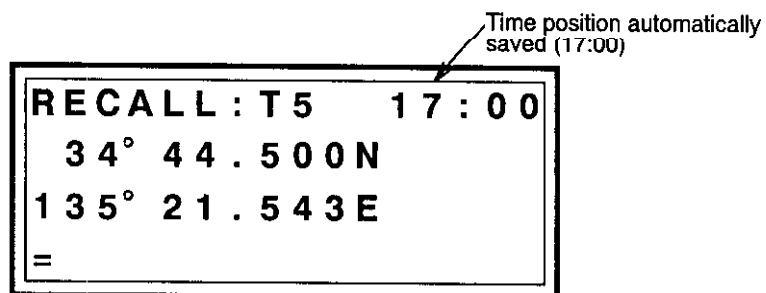

RECALL : T5 17 : 00
34° 44 . 500 N
135° 21 . 543 E
=

Time position automatically saved (17:00)

Figure 2-18 RECALL display, showing automatically saved position

WAYPOINT NAVIGATION

This chapter provides the information necessary for waypoint navigation. A waypoint is a particular location on a voyage, whether it be a starting point, an intermediate point or a destination point. Using a waypoint, the GP-50 MARK-2 can calculate various navigation information from the present position to the waypoint. These are

- range and bearing
- ideal course
- estimated time of arrival
- time-to-go, and
- cross track error.

Registering Waypoints

The GP-50 MARK-2 has 150 waypoints into which you can enter position information. You register a waypoint using up to seven alphanumeric characters. One method is to register a waypoint by geographic name; for example, Tokyo, Miami, etc.

■ **NOTE:** *If you register a waypoint under a name which you've already used, all waypoint information for that waypoint will be overwritten.*

How to register a waypoint

There are three methods to enter a waypoint:

- by direct input of latitude and longitude
- by present position, and
- by previously saved position.

By direct input of latitude and longitude

For purposes of illustration try to enter the position of Kobe, Japan into a waypoint. The coordinates are: 34 degrees, 39.836 minutes North Latitude, and 135 degrees, 12.059 minutes East Longitude. The keying sequence would be as follows:

1. Press **WPT**. A destination waypoint appears. (More on the destination waypoint later.)

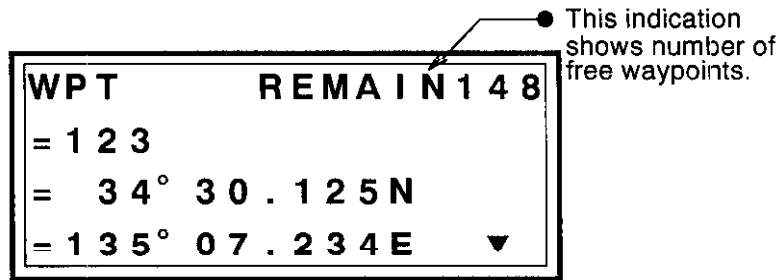


Figure 3-1 WPT display

2. Press **CLR**. The cursor is on the second line of the display. This is where you enter waypoint name. Using the example, enter K-O-B-E as follows.
3. Press the **4** key.
4. Press the **Change** key twice to display K.
5. Press the **5** key.
6. Press the **Change** key three times to display O.
7. Press the **1** key.
8. Press the **Change** key twice to display B.
9. Press the **2** key.
10. Press the **Change** key twice to display E.
11. Press the **ENT** key. Any latitude and longitude data displayed disappears. The cursor advances to the third line of the display where you enter latitude.

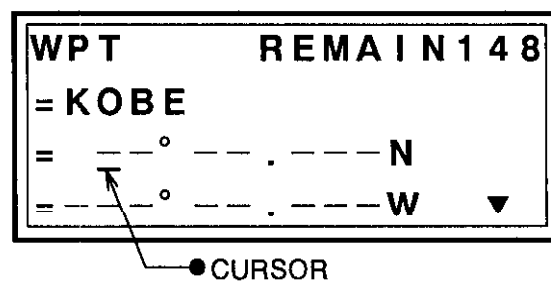


Figure 3-2 WPT display

12. Enter latitude (of Kobe, Japan). The keying sequence would be

3
4
3
9
8
3
6

- **NOTE 1:** The **CLR** key cancels wrong data.
- **NOTE 2:** The **Change** key switches coordinate from North to South, East to West, or vice versa.

13. Press the **ENT** key.
14. Enter longitude (of Kobe, Japan). The keying sequence would be

1
3
5
1
2
0
5
9
Change

15. Press the **ENT** key.

Then, the display shows as follows.

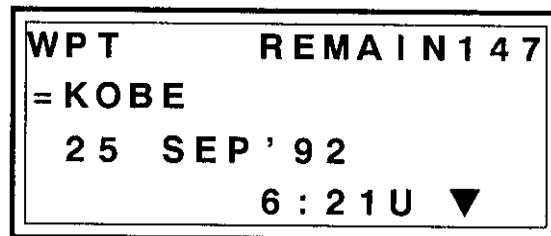


Figure 3-3 Appearance of WPT display after registering a waypoint

By present position

The procedure which follows shows you how to register a saved position as a waypoint, by entering waypoint name.

1. Press the **SAVE** key. The present position appears on the display.

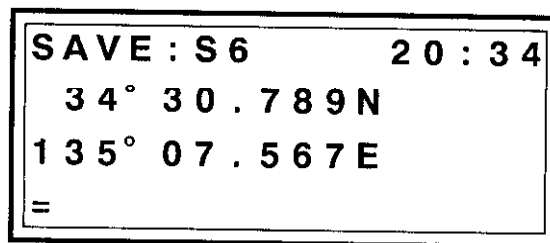


Figure 3-4 SAVE display

2. Press the **CLR** key. The cursor appears on the fourth line of the display.

3. Enter name desired;

- a) Press key having desired character.
- b) Press the **Change** key to display desired character.
- c) Repeat a) and b) to finish entering name.

■ **NOTE:** To clear just entered wrong data press the **CLR** key.
The cursor moves back one space.

4. Press the **ENT** key.

By previously saved position

Follow the procedure below to register a waypoint by recalling a saved position (including automatically saved positions).

1. Press the **RECALL** key to display the position you want to register as a waypoint.

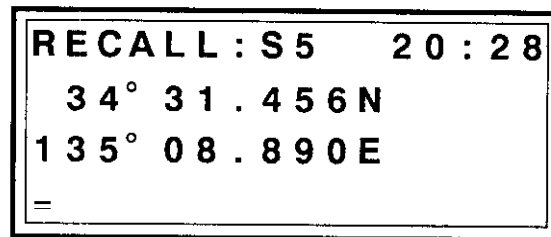


Figure 3-5 Typical RECALL display

- 2. Press the **CLR** key.
- 3. Enter name desired.
- 4. Press the **ENT** key.

Viewing the Waypoint List

The waypoint list stores the position information of waypoints. You may display the list by pressing the **WPT** key. The list can be scrolled by pressing the **Arrow** key. Waypoints are stored in numeric order followed by alphabet order. If you have many waypoints entered obviously it would take a long time to scroll the list to view a waypoint whose name begins with Z. By entering the first alphanumeric character of the waypoint name however you can view a desired waypoint much more quickly.

Displaying the waypoint list

The procedure which follows shows how to display both the waypoint list and waypoint desired.

1. Press the **WPT** key. The destination waypoint appears on the display.

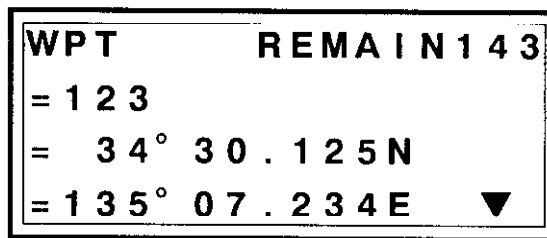


Figure 3-6 WPT display

2. Press the **CLR** key. The cursor appears.
3. Press the **Arrow** key. The waypoint which comes first in numeric then alphabet order appears to the right of the "<" mark.

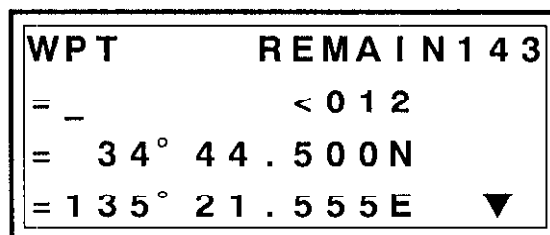


Figure 3-7 WPT display

4. Press the **Arrow** key to display the waypoint desired.

■ **SCROLLING THE LIST QUICKLY:** To scroll the list more quickly, enter the first character of waypoint desired. For example, the waypoint name is **FURUNO**. Press the **2** key followed by the **Change** key three times to display **F**. Then, press the **Arrow** key to display **FURUNO**.

Deleting Waypoints

The unit stores up to 150 waypoints. When the waypoint memory is full you cannot enter waypoints. In this case delete unnecessary waypoints to make room for new waypoints.

This procedure which follows shows you how to delete the waypoint "OSAKA".

1. Press the **WPT** key.
2. Press the **CLR** key.
3. Enter waypoint name you want to delete. To enter OSAKA, for example;
 - a) Press the **5** key followed by the **Change** key three times to display O.
 - b) Press **7** and **Change** to display S.
 - c) Press **1** and **Change** to display A.
 - d) Press the **4** key followed by the **Change** key twice to display K.
 - e) Press **1** and **Change** to display A.
4. Press the **ENT** key. The waypoint name and its L/L coordinates appear on the display for your confirmation.

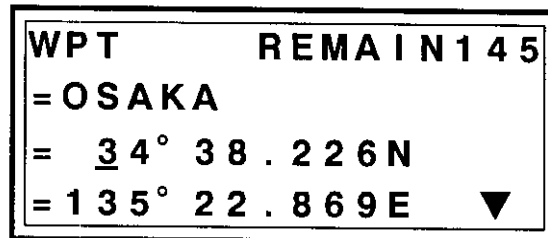


Figure 3-8 WPT display

5. Press the **CLR** key. The latitude figure disappears.
6. Press the **CLR** key again. The prompt **DELETE?** appears on the display.
7. Press the **ENT** key. The waypoint OSAKA is deleted. The next waypoint appears.

Selecting a Destination Waypoint


A destination waypoint can be any waypoint you have previously registered. Using a destination waypoint you can find the following information from your present position to the destination waypoint:

- the range and bearing
- ideal course
- the estimated time of arrival
- the time-to-go to arrival, and
- cross track error.

The procedure which follows shows how to select waypoint **KOBE** as the destination waypoint.

1. Press the **GOTO** key.
The destination waypoint which was selected previously appears.
2. Press the **CLR** key.
3. Select waypoint. You can select it either manually, by entering the name yourself, or automatically. For automatic selection;
 - press numeral key which carries first character of waypoint name
 - press the **Change** key to display the first character, and
 - press the **Arrow** key to select waypoint.

Using the waypoint **KOBE** as an example, press the **4** key followed by pressing the **Change** key twice to display **K**.

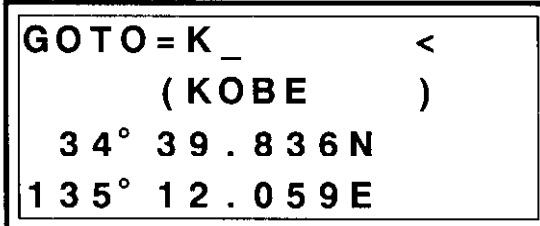

```

GOTO = K _ <
      ( KOBE )
      34° 39.836N
      135° 12.059E
  
```


Figure 3-9 GOTO display, showing destination waypoint

4. Press the **Arrow** key to display waypoint desired (in the example, **KOBE**).
5. Press the **ENT** key.

Canceling the Destination Waypoint

Once you've arrived to your destination you probably won't need the destination waypoint. You can cancel it by following the procedure below.

1. Press the **GOTO** key.

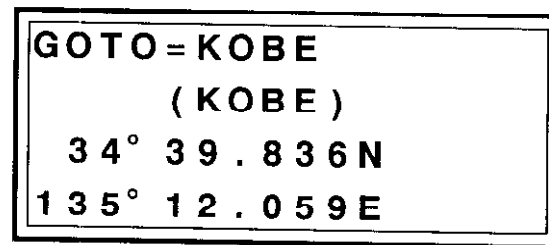


```

GOTO = KOBE
      ( KOBE )
      34° 39 . 836 N
      135° 12 . 059 E
  
```

Figure 3-10 GOTO display

2. Press the **CLR** key. The destination waypoint name (on the first line) disappears.
3. Press the **CLR** key.

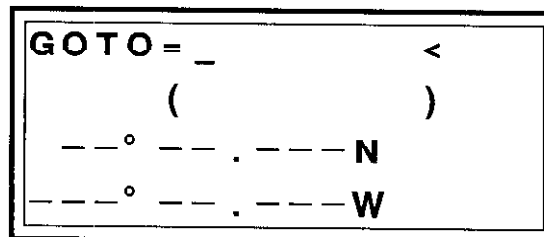

```

GOTO = _ <
      (      )
      --° -- . --- N
      --° -- . --- W
  
```

Figure 3-11 GOTO display appearance when deleting the destination waypoint

4. Press the **ENT** key.

Control is returned to previous display.

Destination Waypoint Information

The destination waypoint provides the following information:

- the range and the bearing from your ship to the destination waypoint
- ideal course to the destination waypoint
- cross track error to the destination waypoint
- velocity to the destination waypoint, and
- estimated time of arrival to the destination waypoint.

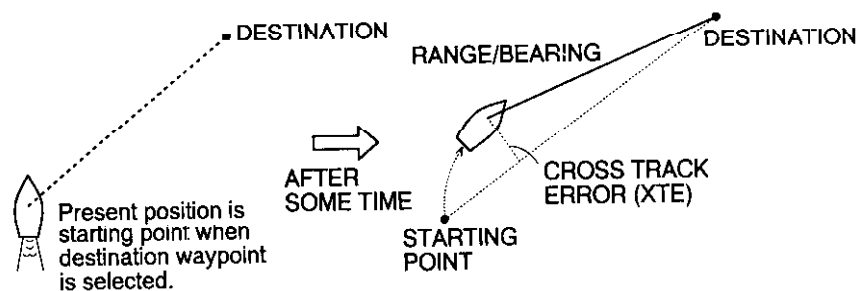


Figure 3-12 Graphic interpretation of information provided by the destination waypoint

Range and bearing

You can find the range and bearing from your vessel to the destination waypoint two ways: by the R/B key or NAV 1 display.

R/B key

Press the **R/B** key. If the destination waypoint selected is KOBE, for example, the display should look something like Figure 3-13.

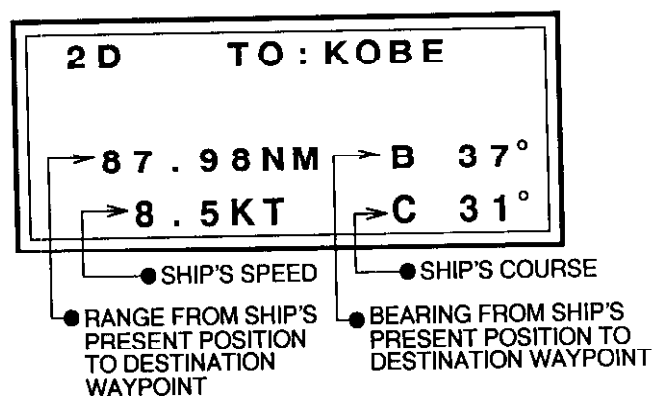


Figure 3-13 Range and bearing information display

- **NOTE:** If the point is on a route the route number appears on the second line. (More on route navigation in the next chapter.)

NAV 1 display

In the default setting, range and bearing to a destination waypoint appears also on the NAV 1 display, which you can display by pressing the **NAV 1** key. In a later chapter you will learn how to preset the NAV 1 display, as well as the NAV 2 and NAV 3 displays, to your liking.

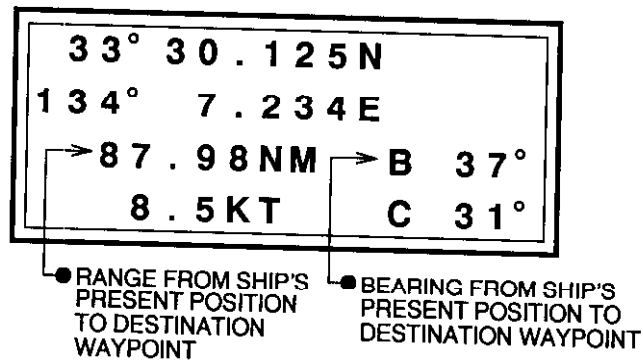


Figure 3-14 Typical NAV 1 display

Cross track error (XTE)

Wind, waves, currents, steering errors, vessel loading imbalance and other forces can combine to throw the vessel off its intended track.

The amount in nautical miles the vessel is straying from its intended course is called the cross track error or XTE. The GP-50 MARK-2 shows you how much your vessel is being thrown off its intended course.

Take a look at Figure 3-15. The perpendicular line from the intended track to the actual position of the vessel is the cross track error. In the figure, it is necessary to steer right to return to the intended track.

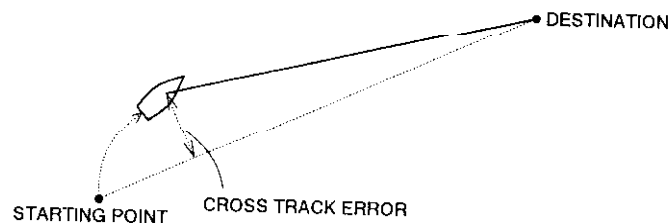


Figure 3-15 Graphic interpretation of cross track error

To find cross track error, press the **NAV 2** key. Figure 3-16 shows a typical cross track error display. On the top line of the display the amount of cross track error is shown by numeric figure and the direction of cross track error, as well as the

amount, by filled diamond marks. The double bar depicts intended track. Table 3-1 explains how to interpret the graphic cross track error display. The number and position of filled diamond marks show the range and direction of cross track error. In Figure 3-16 three filled diamond marks are to the left of double bar (intended track), so the vessel is off track to port side by 0.08 to 0.16 nautical miles. The numeric indication shows the cross track error to be 0.15 nautical miles.

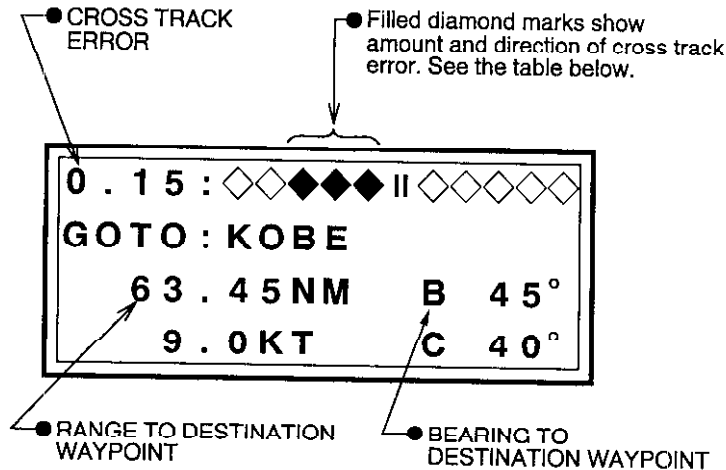


Figure 3-16 Typical cross track error display

Other information shown on the NAV 2 display includes

- name of destination waypoint (2nd line)
- range to destination waypoint (3rd line)
- bearing to destination waypoint (3rd line)
- ship's speed (4th line), and
- course (4th line).

Table 3-1 How to interpret the graphic cross track error display

Cross Track Error (XTE) *	Graphic Display
$-0.02 \leq XTE \leq 0.02$	◆ ◆◇◇◇◇
$0.02 < XTE \leq 0.04$	◇ ◆◇◇◇◇
$0.04 < XTE \leq 0.08$	◆◆◇◇◇
$0.08 < XTE \leq 0.16$	◆◆◆◇◇
$0.16 < XTE \leq 0.32$	◆◆◆◆◇
$0.32 < XTE \leq 0.64$	◆◆◆◆◆
$0.64 < XTE \leq 1.28$	◇◆◆◆◆
$1.28 < XTE \leq 2.56$	◇◇◆◆◆
$2.56 < XTE \leq 5.12$	◇◇◇◆◆
$5.12 < XTE$	◇◇◇◇◆

* Range unit according to selection

VTD, TTG and ETA

VTD, TTG and ETA appear on the NAV 3 display. Press the **NAV 3** key to display this information.

VTD (Velocity to Destination)

Velocity to destination is the amount of velocity (speed) in the direction of the desired destination.

TTG (Time-To-Go)

This is the estimated time remaining to reach a waypoint, maintaining current speed and course.

ETA (Estimated Time of Arrival)

This is the estimated time you will arrive to a waypoint using current speed and course.

Figure 3-17 shows a typical NAV 3 display and an illustration which explains its indications.

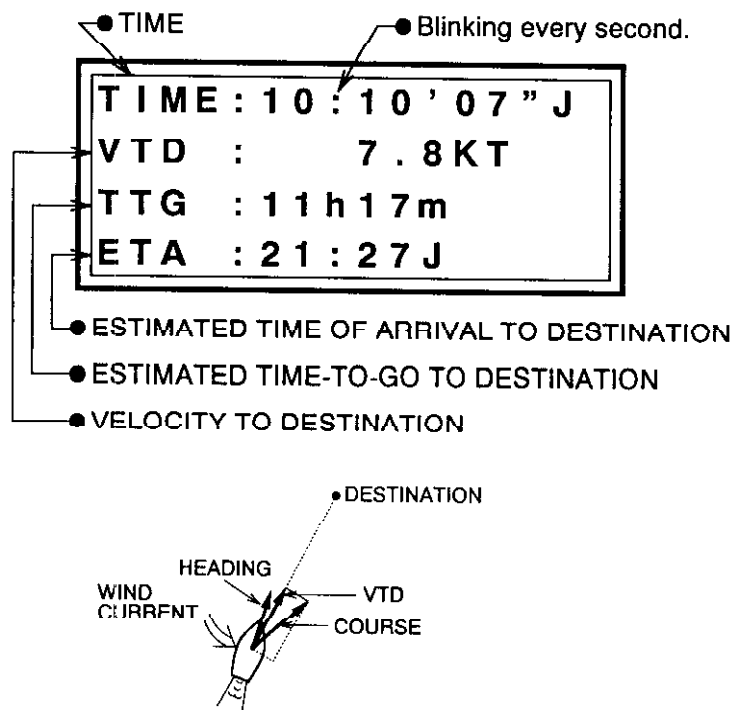


Figure 3-17 Typical NAV 3 display and graphic interpretation of VTD

ROUTE NAVIGATION

In many cases a trip from one place to another involves several course changes, requiring a series of route points (waypoints) which you navigate to, one after another. The sequence of waypoints leading to the ultimate destination is called a **route**. The GP-50 MARK-2 can automatically advance to the next waypoint on a route, so you do not have to change the destination waypoint repeatedly.

■ **CAUTION:** *The route planning function is a very useful and beneficial function to have available. However, the ability to switch waypoints automatically during a voyage can lead to some very dangerous situations. The use of any navigational aid requires constant exercise of common sense and caution. FURUNO Electric Company will assume no responsibility for any damages associated with use of the route navigation function.*

Creating a Route

You can store up to 10 routes. The unit numbers them 0 to 9. Each route may consist of up to 10 waypoints.

■ **CAUTION:** *Be sure to record all important routes in a separate log. This unit is not a fail-safe record keeping device.*

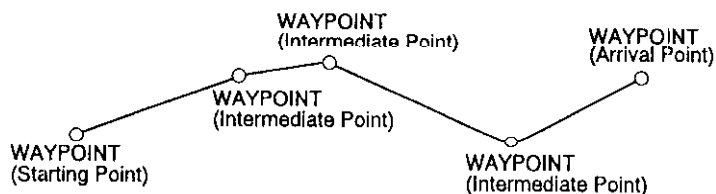


Figure 4-1 Sample route

Registering a route

The procedure which follows describes how to create a route from two waypoints in Japan, Kobe and Osaka, using the information tabulated in Table 4-1.

Table 4-1 Points on sample route

	Route Content	Waypoint Name
Route No. 1	Starting point	KOBE
	1st Intermediate point	1
	2nd Intermediate point	6
	3rd Intermediate point	12
	Arrival point	OSAKA

1. Press **MENU** to display the menu.

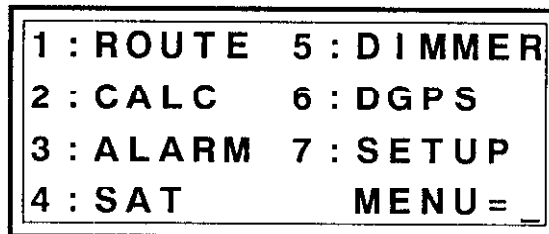


Figure 4-2 Menu

2. Press the **1** key to select ROUTE.

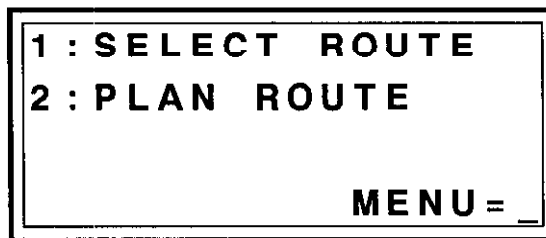


Figure 4-3 ROUTE menu

3. Press the **2** key to select PLAN ROUTE.

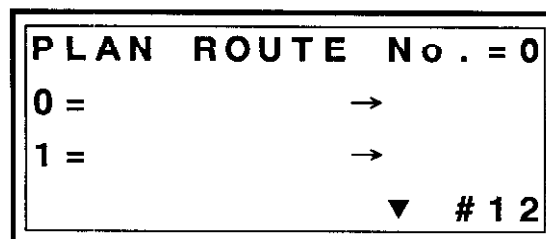


Figure 4-4 PLAN ROUTE display

4. Press the **CLR** key. The cursor appears on the first line of the display.
5. Enter route number. Using the example, press the **1** key to select route no. 1.
6. Press the **ENT** key. The cursor moves to the second line.

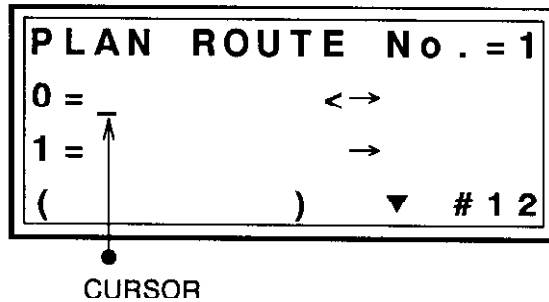


Figure 4-5 *PLAN ROUTE display*

7. Enter starting point. (In the example, KOBE.)
 - a) Press **4** followed by pressing **Change** twice to display K.
 - b) Press the **Arrow** key several times to display KOBE on the fourth line.
8. Press the **ENT** key.

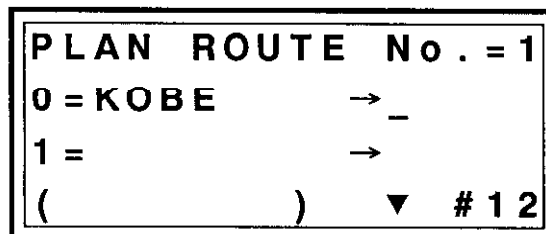


Figure 4-6 *PLAN ROUTE display*

9. Press the **ENT** key to advance the cursor to the third line.
10. Press the **1** key to register waypoint 1 as 1st intermediate waypoint.
11. Press the **ENT** key twice.
12. Press the **6** key to register waypoint 6 as 2nd intermediate waypoint.
13. Press the **ENT** key twice.

14. Press keys **1** and **2** in order to register waypoint 12 as 3rd intermediate point.
15. Press the **ENT** key twice.
16. Enter arrival point. (In the example, OSAKA.)
 - a) Press **5** followed by pressing **Change** three times to display **O**.
 - b) Press the **Arrow** key several times to display OSAKA on the fourth line.
17. Press the **ENT** key several times until next display appears.

Then, the display shows route number and total distance in the route.

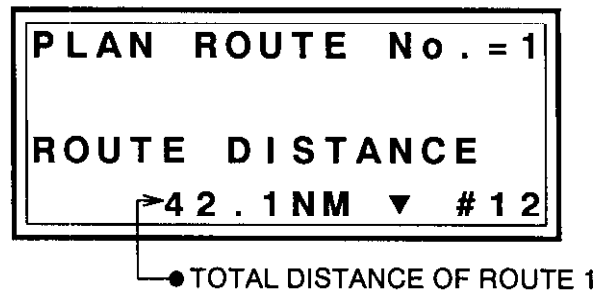


Figure 4-7 PLAN ROUTE display, showing total distance in a route

18. You can confirm route contents (waypoint names) by pressing the **Arrow** key.

To enter another route, repeat steps 4 through 17.

Changing a Route

Temporarily de-selecting a point

You can temporarily deselect an unnecessary point on route. Using the route created in Figure 4-1 as an example, deselect the 2nd intermediate point (waypoint 6).

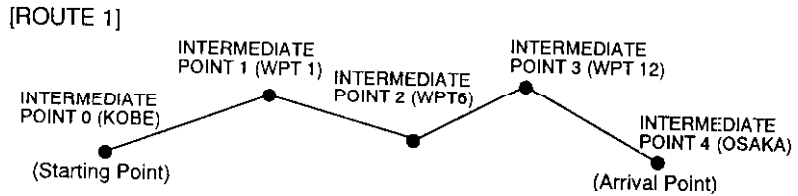


Figure 4-8 Sample route

If you reconstruct the route without the 2nd intermediate point it would look like Figure 4-9.

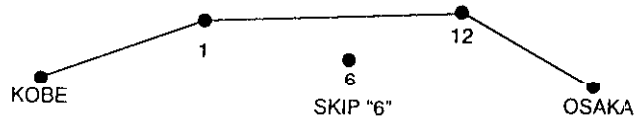


Figure 4-9 Sample route in Figure 4-8 reconstructed without 2nd intermediate point

1. Press **MENU**, **1** and **2** to select PLAN ROUTE.
2. Press **CLR**, **1** and **ENT** to designate route no. 1.
3. Press the **ENT** key five times to display the 2nd intermediate point.

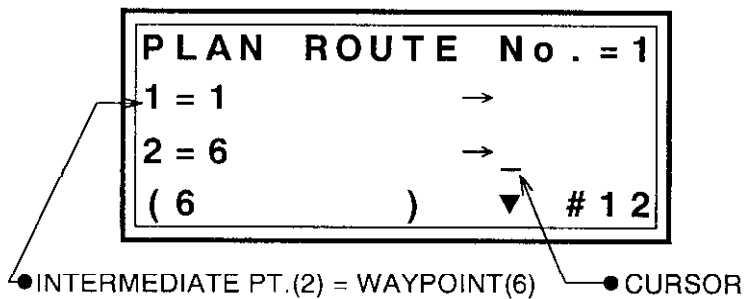


Figure 4-10 PLAN ROUTE display

- Press the **Change** key. **SKIP** appears on the display. **SKIP** means the point is temporarily deselected from the route.

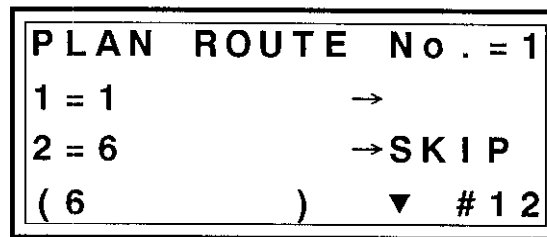


Figure 4-11 *PLAN ROUTE* display, showing a deselected route point

- Press the **ENT** key. To temporarily deselect another point on the route, display the point you want to deselect, and then press the **Change** key followed by the **ENT** key.

Restoring a point to a route

When you want to restore a point to a route, do steps 1 through 3 in "Temporarily deselecting a point", and then press the **Change** key to erase **SKIP**, and then press the **ENT** key.

Permanently deleting a point

To permanently delete a point on a route;

- Press **MENU**, **1** and **2** to select **PLAN ROUTE**.
- Press the **CLR** key.
- Enter route number.
- Press the **ENT** key several times to display the point you want to delete. For example, you want to delete the 3rd intermediate point (waypoint 12) on route no. 1.

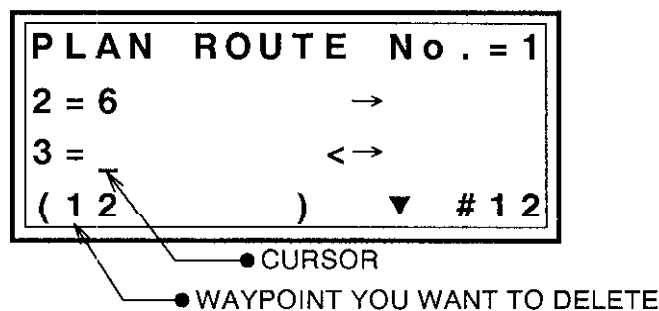


Figure 4-12 *PLAN ROUTE* display, showing a deselected route point

5. Press the **CLR** key. The third line displays "DELETE?".
6. Press the **ENT** key.

Replacing a point

To replace a point;

1. Press **MENU**, **1** and **2** to select PLAN ROUTE.
2. Press the **CLR** key.
3. Enter route number.
4. Press the **ENT** key. The cursor appears under "0=".
5. Press the **ENT** key several times to place the cursor underneath the point you want to replace.
6. Enter new waypoint.
7. Press the **ENT** key.

Deleting route contents

There are two ways to delete the contents of a route:

- delete points on the route one by one, or
- overwrite waypoints on the route.

■ **NOTE:** *Route number cannot be deleted.*

Following a Route

Following a route is the process by which you use a stored route for navigation. This unit displays navigation information to guide you from one waypoint to the next, as it automatically switches from waypoint to another in sequence.

Selecting a route for navigation

The procedure which follows shows how to follow the route shown in Figure 4-13.

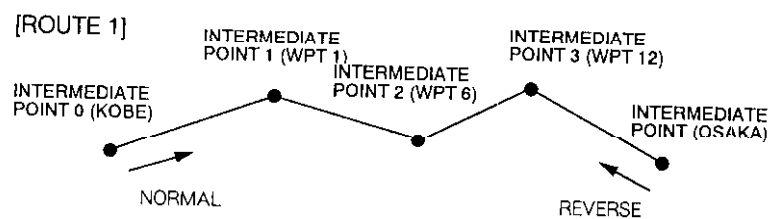


Figure 4-13 Sample route

1. Press **MENU**, **1** and **1** to display the **SELECT ROUTE** display.

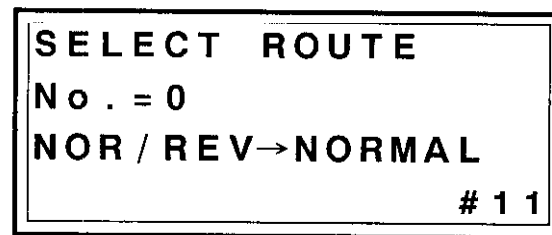


Figure 4-14 **SELECT ROUTE** display

2. Press the **CLR** key to advance the cursor to the second line.
3. Press the **1** key to select route no. 1.
4. Press the **ENT** key. The buzzer sounds three times to inform you the unit is going to follow a route.
5. If you want to change the direction of route points, normal (forward) or reverse, press the **change** key followed by the **ENT** key.

Route navigation information

The first thing to do after selecting a route for navigation is to steer the vessel in the direction of the starting point. Once the vessel is heading toward the starting point, the GP-50 MARK-2 shows various navigation information.

Range and bearing to intermediate point

Press the **R/B** key. The display shows the following information:

- route number
- waypoint name of next intermediate point
- range and bearing from present position to next intermediate point
- ship's speed, and
- ship's course.

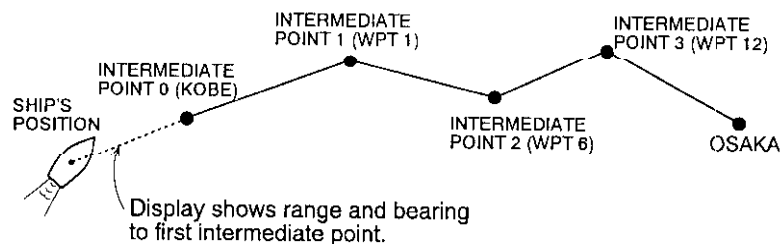
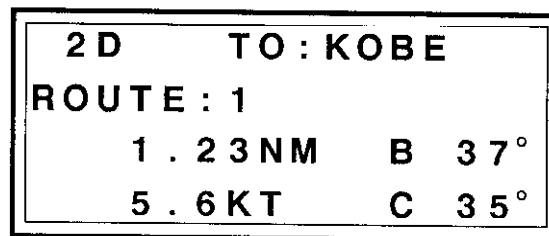


Figure 4-15 Typical R/B display and graphic interpretation of its indications

When the vessel reaches an intermediate point

When the vessel reaches an intermediate point the unit automatically switches to the next intermediate point and shows the range and bearing to that point.

The GP-50 MARK-2 confirms arrival at an intermediate point by using one of the following:

- the arrival range setting (factory setting: 0.5 nautical miles), or
- when the vessel crosses a perpendicular line intersecting intermediate points.

Figure 4-16 illustrates the methods of waypoint switching.

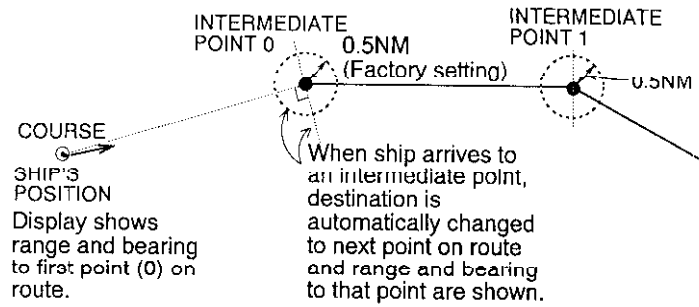


Figure 4-16 How the GP-50 MARK-2 determines arrival at an intermediate point

■ **NOTE:** You can change the arrival alarm range on the Alarm menu. More on the alarms in a later chapter.

Cross track error (XTE)

As noted earlier, the cross track error is the amount in nautical miles the vessel is straying from its intended course. Press the NAV 2 key to display the cross track error display.

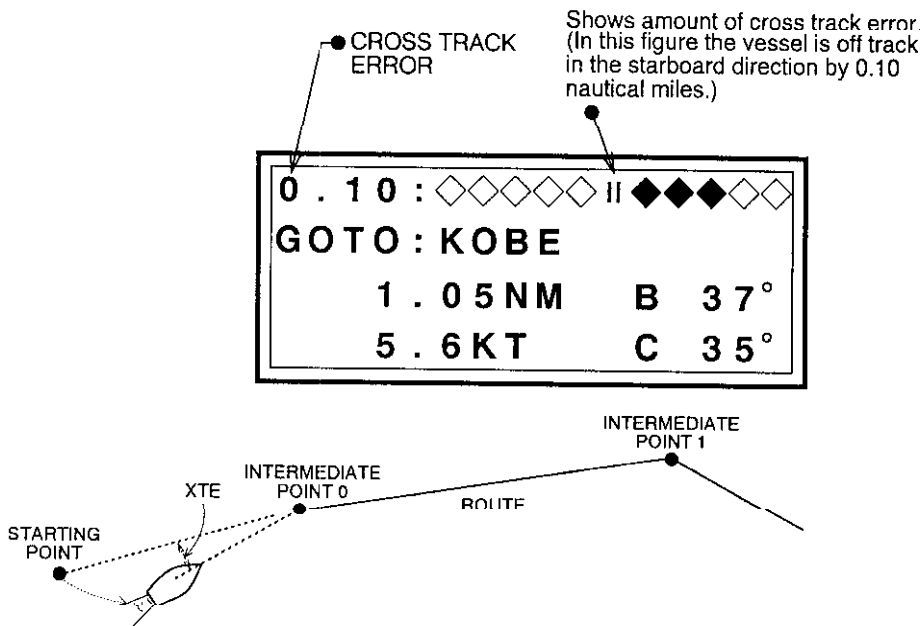


Figure 4-17 Typical cross track error display

Canceling Route Navigation

You can cancel route navigation by

- pressing the **GOTO** key and selecting a destination waypoint, or
- Press **GOTO**, **CLR** twice, and **ENT** to delete destination waypoint.

MISCELLANEOUS FUNCTIONS

This chapter covers miscellaneous functions. These are

- calculating range and bearing between two points
- calculating Time-To-Go (TTG) between two waypoints
- displaying and resetting distance run
- correcting chart system and position
- displaying magnetic bearing
- changing units of measurement
- presetting the NAV displays
- presetting smoothing
- the single menu mode, and
- presetting position fixing mode and elevation mask angle.

Calculating Range and Bearing Between Two Points

The procedure which follows shows how to calculate the range and bearing between waypoints KOBE and OSAKA.

1. Press **MENU, 2** and **1**.
2. Press the **CLR** key. The cursor appears on the first line.
3. Select the starting point. If the starting point is your vessel, simply press **ENT**. Asterisks appear on the first line. In the example the starting point is KOBE. You would
 - a) Press the **4** key.
 - b) Press the **Change** key twice to display K.
 - c) Press the **Arrow** key to display KOBE.
 - d) Press the **ENT** key.
4. Enter the end point. In the example the end point is OSAKA. Select it and then press the **ENT** key. The range and bearing are shown on the display.

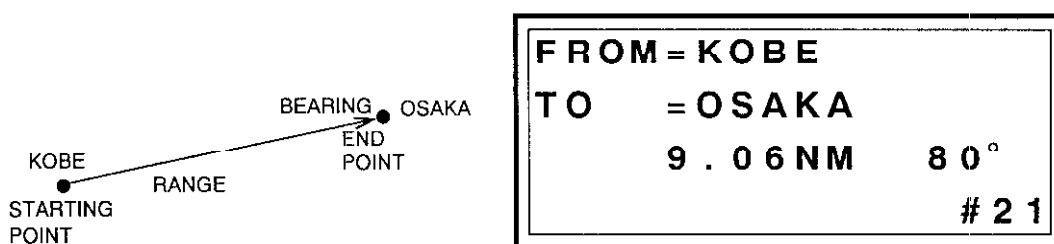


Figure 5-1 Typical range and bearing calculation

Time-To-Go (TTG) Between Two Waypoints

The GP-50 MARK-2 can estimate time required to go from one waypoint to another using ship's present speed. In addition it shows you estimated time of arrival. The procedure which follows shows how to calculate TTG from KOBE to OSAKA by ship's speed of 5.5 knots.

1. Press the **MENU** key, and then press the **2** key twice to display the MANUAL TTG display.
2. Press the **CLR** key.
3. Enter the starting point. In the example it is KOBE.
4. Press the **ENT** key.
5. Enter the end point. In the example it is OSAKA.
6. Press the **ENT** key.
7. Enter ship's speed. In the example you would enter 5.5 knots as follows:

0
0
5
5

8. Press the **ENT** key. Figure 5-2 shows what the display might look like using waypoints KOBE and OSAKA as the TO and FROM waypoints.

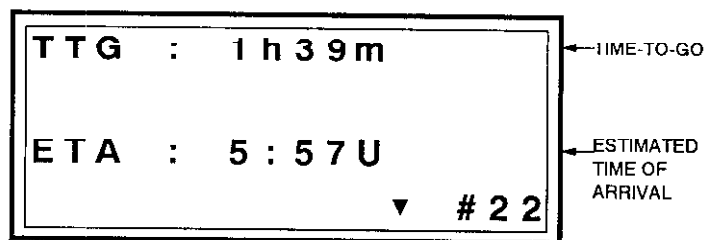


Figure 5-2 Typical TTG display

The arrow symbol on the display means you can alternate display of TTG and the FROM and TO waypoints (used for TTG calculation) by pressing the **Arrow** key.

■ **NOTE:** *ETA is the time from present position to a destination waypoint.*

Displaying Distance Run

1. Press **MENU**, **3** and **4** to display the TRIP ALARM display.

TRIP ALARM
TRIP = 123.4NM
TIME : 21h15m
SET = 0.0NM #34

Figure 5-3 TRIP ALARM display

The total distance run and total time run appear on the second and third lines of the display. If you want to reset distance run and time display to zero proceed to step 2.

2. Press the **CLR** key.
3. Press the **CLR** key again.
4. Press the **ENT** key. The TRIP and TIME figures are now zero.

TRIP ALARM
TRIP = 0.0NM
TIME : 0h 0m
SET = 0000.0NM #34

Figure 5-4 TRIP ALARM display, TRIP and TIME reset to zero

Chart System and Position

Standard GPS chart system

A nautical chart is usually made by either trigonometrical survey or astronomical survey and according to the geodetic chart standards of the country it is used in. The GPS adopts WGS-84 chart system.

Chart systems stored in the GP-50 MARK-2

Thus it is necessary to apply a correction value to the WGS-84 to match it to local geodetic systems.

This unit can perform this calculation automatically if you tell it what type of chart you're using. The GP-50 MARK-2 recognizes eight major charts. Select the chart system used, not the area where the boat is sailing. Below are the chart systems the GP-50 MARK-2 recognizes.

- WGS-84
- WGS-72
- Tokyo
- NAD 27
- European
- Australian
- New Zealand
- Great Britain

If the chart you are using is not programmed in this unit, you will have to enter latitude and longitude correction values manually. You will learn how to do this a little later.

Selecting chart system

To select chart system;

1. Press **MENU**, **7**, **2** and **1** to display the GEODETIC DATUM display.
2. Press the **CLR** key.
3. Press the **Change** key several times to display chart system you are using, followed by the **ENT** key.

The chart selected and latitude and longitude correction values appear on the display. If you selected the European chart system, for example, the display would look something like Figure 5-5.

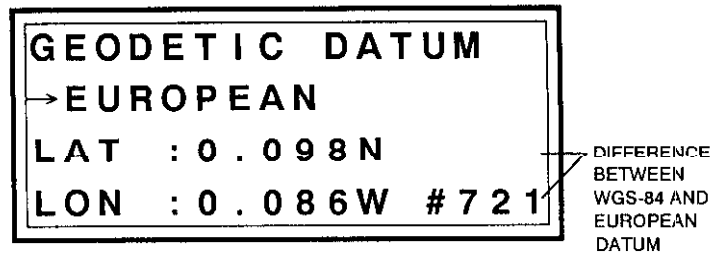


Figure 5-5 GEODETIC DATUM display, European chart selected

Entering chart correction value

If the chart you are using is not one of the eight charts preprogrammed in the GP-50 MARK-2, you will need to enter a latitude and longitude correction value. Figure 5-6 shows the position measured by the GP-50 MARK-2 to be off by some degrees. To correct this error, measure the difference between the actual position and GPS fix position on your chart.

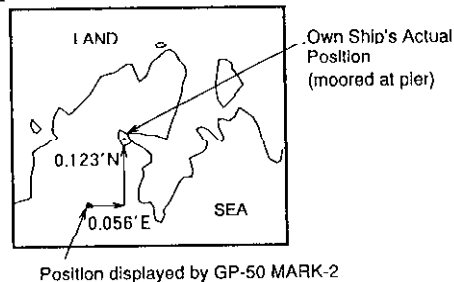


Figure 5-6 Nautical chart, showing error

To enter correction value of 0.123 minutes North Latitude, 0.056 minutes East Longitude;

1. Press **MENU**, **7** and **2** twice to display the Δ L/L display.

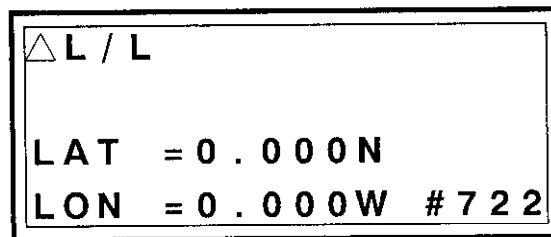


Figure 5-7 Δ L/L display

2. Press the **CLR** key.
3. Enter latitude correction value. Using the example of 0.123 minutes, press keys **0**, **1**, **2** and **3**, followed by the **ENT** key.
4. Enter longitude correction value. Using the example of 0.056 minutes, press keys **0**, **0**, **5**, **6**, and then press the **Change** key, followed by the **ENT** key.


Entering Magnetic Variation

The location of the magnetic north pole is different from the geographical north pole. This causes a difference between the true and magnetic north direction. The difference is called magnetic variation, and varies with respect to the observation point on the earth. The GP-50 MARK-2 is programmed with the earth's magnetic variations. You can enter magnetic variation yourself or let the GP-50 MARK-2 do it for you.

Automatic

To get automatic magnetic variation;

1. Press **MENU**, **7**, **2** and **3** to display the **MAGNETIC VAR(iation)** display.

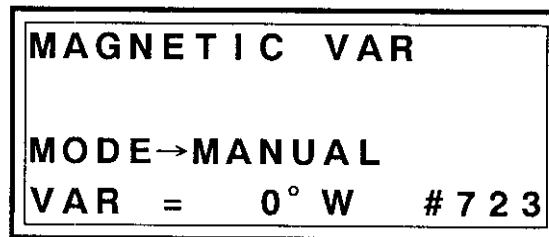


```

MAGNETIC VAR
MODE->MANUAL
VAR = 0° W # 7 2 3
  
```

Figure 5-8 MAGNETIC VAR display

2. Press the **CLR** key.
3. Press the **Change** key to display **AUTO**.
4. Press the **ENT** key. The display should look something like Figure 5-9.

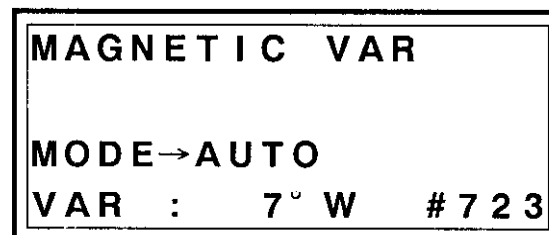

```

MAGNETIC VAR
MODE->AUTO
VAR : 7° W # 7 2 3
  
```

Figure 5-9 Sample Auto MAGNETIC VAR display

Manual

To manually enter magnetic variation;

1. Press **MENU**, **7**, **2** and **3** to display the MAGNETIC VAR display.

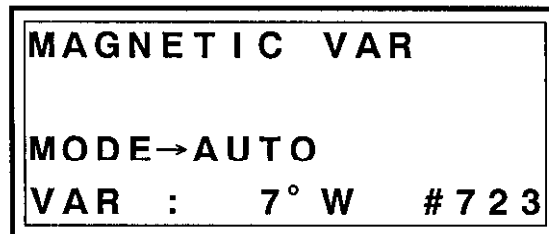


Figure 5-10 MAGNETIC VAR display

2. Press the **CLR** key.
3. Press the **Change** key to display MANUAL.
4. Consult a nautical chart and enter magnetic variation for your sea area.

■ **NOTE:** For true bearing, enter 0 (degree).

5. Press the **ENT** key.

■ **NOTE:** Be sure to change the setting when the magnetic variation changes. Be sure to consult a recent nautical chart.

Changing Unit of Measurement

The unit of measurement for speed, range and sensor unit height may be freely changed to suit your needs. Units of measurement are available as follows:

- Speed: knot (KT), kilometers/hour (Km/h), or miles per hour (MPH)
- Range: nautical miles (NM), kilometers (Km), or statute miles (SM)
- Height: meters (m) or feet (ft)

Follow the procedure below to change unit of measurement.

1. Press **MENU**, **7**, **2** and **5** to display the UNITS display.

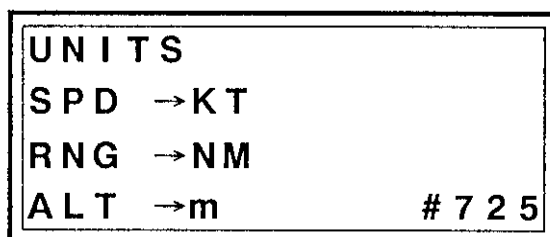



Figure 5-11 UNITS display

2. Press the **CLR** key.
3. Press the **Change** key to select desired speed indication; KT, Km/H or MPH.
4. Press the **ENT** key.
5. Press the **Change** key several times to select desired speed range indication; NM, Km or SM.
6. Press the **ENT** key.
7. Press the **Change** key several times to select desired (sensor unit) height indication; m or ft.
8. Press the **ENT** key.


Presetting the NAV Displays

The three NAV keys on the top row of the keyboard display navigation information when pressed. The user may select what information he or she wants to display on those displays. Six different displays are available. NAV displays #1, #2 and #3 are the factory settings for the keys **NAV 1**, **NAV 2** and **NAV 3**.

NAV DISPLAY #1

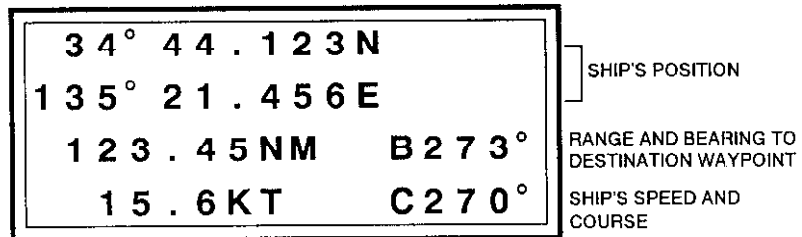

NAV DISPLAY #2

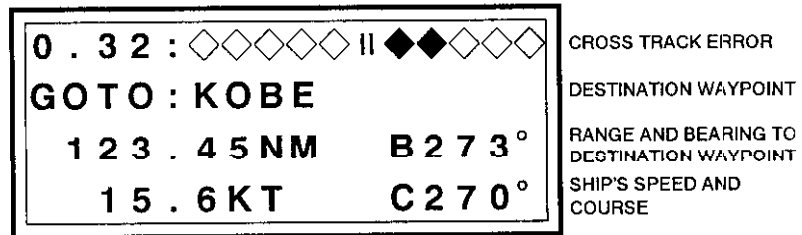

NAV DISPLAY #3


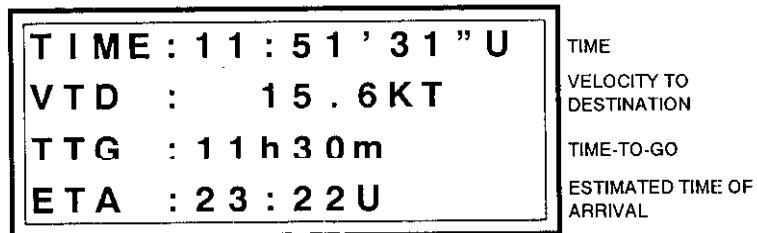


Figure 5-12 NAV DISPLAY #1, #2 and #3

NAV DISPLAY #4

1 2 °	: ◇◇◇◇◇◇ ◆◆◆◆◆◆	COURSE ERROR
GOTO : KOBE		DESTINATION WAYPOINT
1 2 3 . 4 5 NM	B 3 4 9 °	RANGE AND BEARING TO DESTINATION WAYPOINT
1 5 . 6 KT	C 1 0 °	SHIP'S SPEED AND COURSE

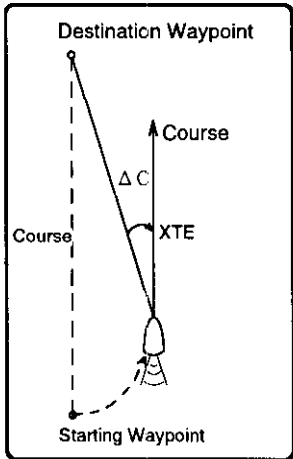

COURSE ERROR DISPLAY

XTE (Δ C)	Display
- 1 ° ~ 1 °	◆ ◆ ◇ ◇ ◇ ◇ ◇
- 2 ° ~ - 4 °	◇ ◆ ◆ ◆ ◆ ◆ ◆
- 5 ° ~ - 8 °	◆ ◆ ◆ ◆ ◆ ◆
- 9 ° ~ - 13 °	◆ ◆ ◆ ◆ ◆ ◆
- 14 ° ~ - 19 °	◆ ◆ ◆ ◆ ◆ ◆
- 20 ° ~ - 26 °	◆ ◆ ◆ ◆ ◆ ◆
- 27 ° ~ - 34 °	◇ ◆ ◆ ◆ ◆ ◆
- 35 ° ~ - 43 °	◇ ◇ ◆ ◆ ◆ ◆
- 44 ° ~ - 53 °	◇ ◇ ◇ ◆ ◆ ◆
- 54 ° ~ - 180 °	◇ ◇ ◇ ◇ ◆ ◆

NAV DISPLAY #5

TRIP :	0 . 0 NM	DISTANCE RUN
DOP :	3 . 6	DOP VALUE
ASPD :	1 1 . 5 KT	AVERAGE SPEED
ACRS :	1 2 3 °	AVERAGE COURSE

NAV DISPLAY #6

0 2 OCT 1 1 : 4 2 ' 3 0 " U	DATE AND TIME	
GOTO : KOBE		
1 2 3 . 4 5 NM	B 2 7 3 °	RANGE AND BEARING TO DESTINATION WAYPOINT
1 5 . 6 KT	C 2 7 0 °	SHIP'S SPEED AND COURSE

Figure 5-13 NAV DISPLAY #4, #5 and #6

How to preset the NAV displays

To preset the NAV displays;

1. Press **MENU**, **7**, **2** and **7** to display the NAV SELECT display.

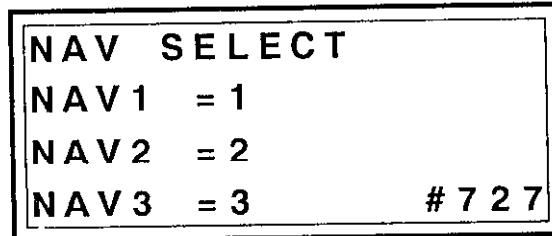


Figure 5-14 NAV SELECT display

2. Press the **CLR** key.
3. Press a numeral key among 1 to 6 to preset what navigation display to display on NAV 1, and then press the **ENT** key.
4. Enter navigation display number desired for NAV 2, and then press the **ENT** key.
5. Enter navigation display number desired for NAV 3, and then press the **ENT** key.

Smoothing

Latitude and longitude

When the DOP or receiving condition is unfavorable, the GPS fix may change greatly, even if the vessel is dead in water. This change can be reduced by smoothing the raw GPS fixes. A setting between 0 and 9 is available. The higher the setting the more smoothed the raw data. Note however that too high a setting slows response time to change in latitude and longitude. This phenomenon is especially noticeable at high ship's speeds. "0" is the normal setting; increase the setting if the GPS fix changes greatly.

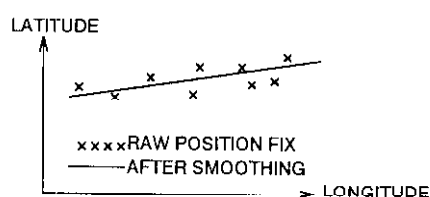


Figure 5-15 Latitude and longitude smoothing

Speed and course

During position fixing, ship's velocity (speed and course) is directly measured by receiving GPS satellite signals. The raw velocity data may change randomly depending on receiving conditions and other factors. You can reduce this random variation by increasing the smoothing. Like with latitude and longitude smoothing, the higher the speed and course smoothing setting the more smoothed the raw data. If the setting is too high, however, the response to speed and course changes slows. For no smoothing, enter "0". Setting "5" is suitable for most conditions.


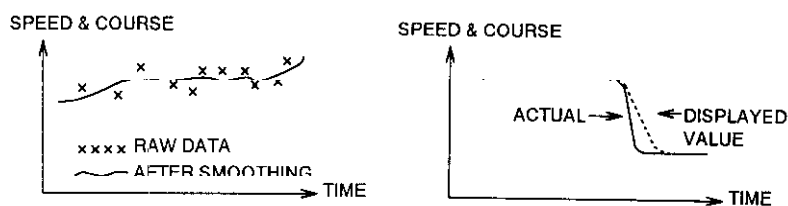


Figure 5-16 Speed and course smoothing

Setting smoothing values

The factory settings for smoothing are more than adequate for most conditions. If adjustment of the factory-set smoothing values is necessary;

1. Press **MENU**, **7**, **2** and **4** to display the **SMOOTHING CONST** display.

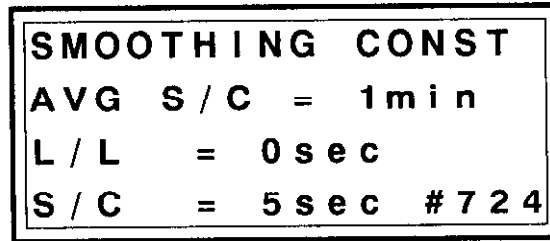

```
SMOOTHING CONST
AVG S / C = 1min
L / L   = 0sec
S / C   = 5sec #724
```

Figure 5-17 SMOOTHING CONST display

2. Press the **CLR** key.
3. Enter average ship's speed and course smoothing time from 0–99 minutes, using two digits.
These values affect the average speed/course and TTG/ETA as shown in page 5-10 and page 3-12, respectively.
4. Press the **ENT** key.
5. Enter latitude and longitude smoothing time from 0–99 seconds, using two digits.
6. Press the **ENT** key.
7. Enter ship's speed and course smoothing time from 0–99 seconds, using two digits.
8. Press the **ENT** key.

Single Menu Mode

The menu contains mostly less-often used functions which once preset do not require frequent readjustment. If you normally do not require the use of the entire menu you can display only a frequently used menu when pressing the **MENU** key. This is called the single menu mode, and eliminates the need to press several numeral keys to get to the display desired.

Turning on the single menu mode

While pressing and holding down the **MENU** key turn on the power. Then, each press of the **MENU** key will display only one menu. The unit is set at the factory to display the DIMMER menu.

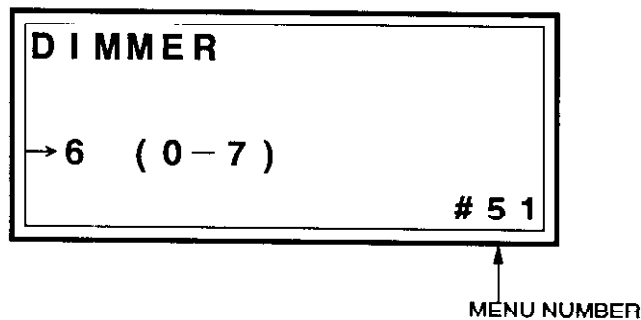


Figure 5-18 DIMMER display

Returning to full menu mode

Turn off the power. While pressing and holding down the **MENU** key turn on the power.

Changing single menu mode display screen

As noted earlier the GP-50 MARK-2 is set at the factory to display the DIMMER menu when in the single menu mode. If you require a different menu;

1. In the full menu mode, press **MENU**, **7**, **1** and **6** to display the SINGLE MENU display.

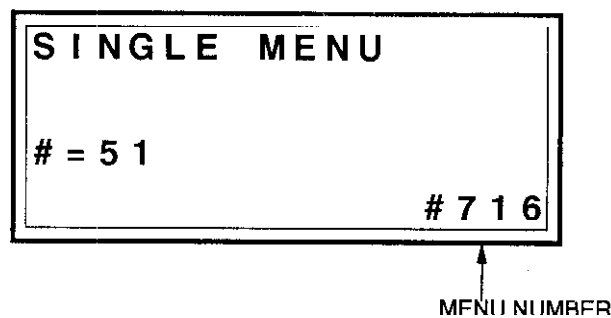


Figure 5-19 SINGLE MENU display

2. Press the **CLR** key.
3. Enter menu number desired. The menu number corresponds to numeral keys pressed after pressing the **MENU** key. For example, to display the **DIMMER** display you press keys **5** and **1**. Refer to Table 5-1 to find menu number.
4. Press the **ENT** key.

Table 5-1 Menu number and function

Menu No.	Menu Name	Function
11	SELECT ROUTE	Select route
12	PLAN ROUTE	Plan route; display total distance run
21	CALCULATE R/B	Calculate range and bearing between two waypoints
22	MANUAL TTG	Calculate time-to-go to destination
31	ARRIVAL/ANCHOR	Turn on or off arrival/anchor watch alarm
32	XTE/BORDER	Turn on or off cross track error/border alarm
33	SPEED	Turn on or off ship's speed alarm
34	TRIP	Turn on or off trip distance alarm
41	LEVEL	Display satellite signal level
42	ELV	Display DOP, satellite elevation angle
43	HEALTH	Display healthy and unhealthy satellites, receiver frequency deviation
44	FUTURE	Display position fixing schedule
45	ALMNAC	Display receiving time of almanac
51	DIMMER	Adjust LCD backlighting
52	CONTRAST	Adjust LCD contrast

Setting Position Fixing Mode and Elevation Mask

Position fixing mode

Table 5-2 shows the position fixing modes available.

Table 5-2 Position fixing modes

Position Fixing Mode	Application
2D (two-dimensional position fix)	Marine vessels; three satellites needed to fix position.
3D (three-dimensional position fix)	Land vehicles and aircraft; four satellites needed to fix position.
2D/3D	Automatic switching from 2D to 3D and vice versa according to how many satellites in line-of-sight.
D2D or D3D	Differential DGP mode.

Elevation mask angle

Elevation mask angle sets the minimum angle a satellite must be positioned above the horizon for the GP-50 MARK-2 to use it to fix its position. The factory setting is five degrees.

■ **NOTE:** *Setting the elevation angle to more than 10 degrees greatly shortens available GPS position fixing time.*

Procedure

The factory settings for both position fixing mode and elevation mask angle are suitable for most conditions. If adjustment is absolutely necessary;

1. Press **MENU**, **7**, **1** and **3** to display the POSITIONING MODE display.

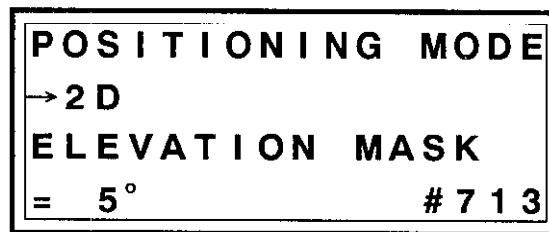


Figure 5-20 POSITIONING MODE display

2. Press the **CLR** key.
3. Press the **Change** key to select 2D, 3D or 2/3D, followed by the **ENT** key.
4. Enter elevation angle. The minimum angle is five degrees.
5. Press the **ENT** key.

Differential GPS Mode

Confirming the specification of DGPS Beacon Receiver

Before enabling the DGPS mode, refer to the Instruction Manual of the DGPS Beacon (MSK) Receiver connected to confirm the specification of its output signal.

Required items for DGPS operation

Signal format	RS-232C
RTCM version number	1.0 / 2.0
Byte format	8-6 / 8-8
First bit	MSB / LSB
Parity bit	even / odd / none
Stop bit	1 / 2
Bit rate	7 / 8
Baud rate (b/s)	300/600/1200/2400/4800/9600

Enabling the DGPS mode

To enable the DGPS mode;

- 1) Press MENU, 6 and 2 to display the DGPS mode.

DGPS	MODE	→	OFF
RTCM	VERSION	→	2.0
BYTE	FORMAT	→	8-6
FIRST	→	MSB	# 6 2

Figure 5-21 DGPS mode display

- 2) Press the **CLR** key.
- 3) Press the **Change** key to select **ON**, followed by **ENT** key.
- 4) Press the **Change** key to select RTCM (Radio Technical Commission Maritime) version numbers; 1.0 or 2.0, followed by the **ENT** key.
- 5) Press the **Change** key to select the byte format; 8-6 or 8-8, followed by the **ENT** key.

8-6: 6 bits used in 8 bits
8-8: all bits used in 8 bits

- 6) Press the **Change** key to select the first bit; MSB or LSB, followed by the **ENT** key. The next page appears.

```

PARITY BIT → NONE
STOP BIT → 1
BIT PATES → 8
SPEED → 9600 ▼ # 62

```

Figure 5-22 Second page of DGPS mode display

- 7) Press the **Change** key to select parity bit; even, odd, or none, followed by the **ENT** key
- 8) Press the **Change** key to select stop bit(s); 1 or 2, followed by the **ENT** key.
- 9) Press the **Change** key to select bit rate; 7 or 8, followed by the **ENT** key.
- 10) Press the **Change** key to select baud rate; 300b/s, 600b/s, 1200b/s, 2400b/s, 4800b/s or 9600b/s, followed by the **ENT** key.

Displaying DGPS receiving status

Press MENU, 6 and 1 to display receiving status.

```

DATA RECEIVE
: GOOD
STATION STATUS
: GOOD # 61

```

Figure 5-23 DGPS data receiving status display

- Input status of correction data from the DGPS Beacon Receiver appears on the second line.
GOOD or NG (No good)
- Operating status of the differential base station appears on the last line.
GOOD or NG (No good)

ALARMS

This chapter provides the information necessary for setting the alarms. There are six conditions which can generate both audible and visual alarms in the GP-50 MARK-2:

- Arrival alarm
- Anchor watch alarm
- Cross track error (XTE) alarm
- Border alarm
- Ship's speed alarm, and
- Trip alarm.

■ **CAUTION:** *The alarms are useful for alerting you to possibly dangerous situations. However, the captain is always responsible for the safe operation of his ship. FURUNO Electric Company will assume no responsibility for any damages associated with the use of the alarms.*

Alarm Description

This section describes the function of each alarm and what occurs when an alarm setting is violated.

Arrival alarm

The arrival alarm warns you that your vessel is approaching a destination waypoint. The area that defines an arrival zone is that of a circle which you approach from outside the circle. The alarm will be released if the boat enters the circle.




Figure 6-1 How the arrival alarm works

Anchor watch alarm

The anchor watch alarm sounds to warn you that your vessel has moved outside the anchor watch zone.




Figure 6-2 How the anchor watch alarm works

Cross track error (XTE) alarm

The cross track error alarm alerts you when your vessel is off its intended course. You may preset the alarm limit from 0.01 nautical miles to a maximum lane width of 99.99 nautical miles. The alarm will be released if you go out of the lane limits.

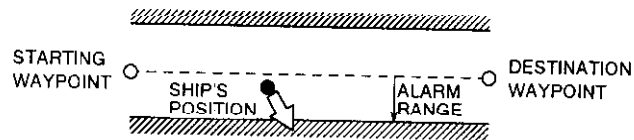


Figure 6-3 How the cross track error alarm works

Border alarm

The border alarm defines an area, comprised of two waypoints, starting waypoint and destination waypoint, which you do not want to cross. The alarm will sound when the boat crosses the area defined by the two waypoints.

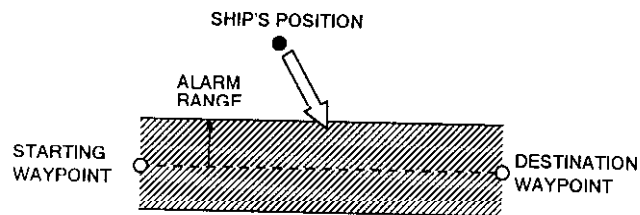


Figure 6-4 How the border alarm works

Ship's speed alarm

The ship's speed alarm sounds when the ship's speed is higher or lower than the preset speed alarm setting.

Trip alarm

The trip alarm sounds when the trip distance exceeds the trip alarm setting.

Silencing the audible alarm

Press the **CLR** key. Note that a visual alarm remains on the display until the reason for the alarm is removed.

Arrival and Anchor Watch Alarms

The arrival and anchor watch alarms cannot be set together. Choose one of them on the ARRIVAL/ANCHOR menu. Further, set destination waypoint before setting alarm.

Arrival alarm

The arrival alarm alerts you when the vessel arrives at an intermediate waypoint or a destination.

1. Press **MENU** and **3** to display the alarm menu.

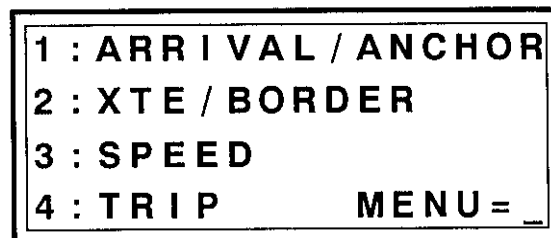


Figure 6-5 Alarm menu

2. Press the 1 key to display the ARRIVAL/ANCHOR display.

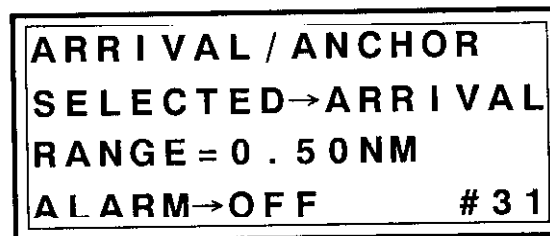


Figure 6-6 ARRIVAL/ANCHOR display

Figure 6-6 shows the factory-set arrival alarm settings: alarm range, 0.5 nautical miles, alarm off.

Using this setting while traversing a route, the unit will automatically switch to the next intermediate point (showing range and bearing to that point) when the vessel is 0.5 nautical miles from the intermediate point.

If you want to be alerted by audible and visual alarms when the vessel is 0.25 nautical miles from an intermediate point, for example, continue with step 3.

3. Press the **CLR** key.


4. Press the **ENT** key if the displays shows ARRIVAL. (If it shows ANCHOR, press the **Change** key to display ARRIVAL then press **ENT**.)
5. Enter arrival alarm range. In the example it is 0.25 nautical miles. Press **0**, **2** and **5**.
6. Press the **ENT** key.
7. Press the **Change** key to display ON.
8. Press the **ENT** key.

When the alarm setting is violated, the unit releases the audible alarm and displays "WCH."

Anchor watch alarm

Note that the **MOB** key can also be used to set destination. Simply press the **MOB** key, and present position is stored as destination waypoint. The anchor watch alarm alerts you when the vessel is dragging anchor.

1. Press **MENU**, **3** and **1** to display the ARRIVAL/ANCHOR display.

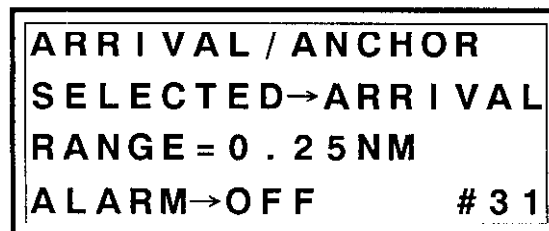

ARRIVAL / ANCHOR
 SELECTED→ARRIVAL
 RANGE = 0 . 2 5 NM
 ALARM→OFF # 3 1

Figure 6-7 ARRIVAL/ANCHOR display

2. Press the **CLR** key.
3. Press the **Change** key to display ANCHOR if the display shows ARRIVAL.
4. Press the **ENT** key.
5. Enter anchor watch alarm range. To enter 0.1 nautical miles, for example, press **0** and **1**m, followed by the **ENT** key.
6. Press the **Change** key to display ON.
7. Press the **ENT** key.

When the alarm setting is violated, the unit releases the audible alarm and displays "WCH."

Cross Track Error and Border Alarms

Both alarms cannot be turned on together. Select one on the XTE/BORDER display.

Cross track error alarm

This alarm alerts when your vessel strays off the intended track, due to wind, waves and other forces.

1. Press **MENU**, **3** and **2** to display the XTE/BORDER display.

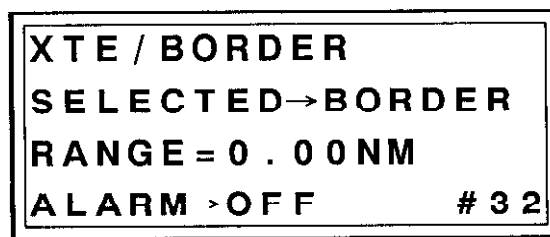


Figure 6-8 XTE/BORDER display

2. Press the **CLR** key.
3. Press the **Change** key to display XTE if it is not already displayed.
4. Press the **ENT** key.
5. Enter cross track error alarm range. To enter 0.25 nautical miles, for example, press **0**, **2** and **5**.
6. Press the **ENT** key.
7. Press the **Change** key to display ON.
8. Press the **ENT** key.

When the alarm setting is violated, the unit releases the audible alarm and displays "XTE."

Border alarm

This alarm sounds when the vessel crosses an imaginary line stretched between two waypoints.

1. Press **MENU**, **3** and **2** to display the XTE/BORDER display.

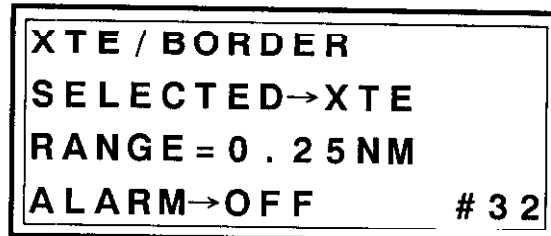


Figure 6-9 XTE/BORDER display


2. Press the **CLR** key.
3. Press the **Change** key to display **BORDER** if it is not already displayed.
4. Press the **ENT** key.
5. Enter border alarm range. To enter 0.3 nautical miles, for example, press **0** and **3**.
6. Press the **ENT** key.
7. Press the **Change** key to display **ON**.
8. Press the **ENT** key.

When the alarm setting is violated, the unit releases the audible alarm and displays "XTE."

Ship's Speed Alarm

This alarm sounds when the ship's speed is higher or lower than the preset speed alarm setting. The procedure which follows shows how to set the high and low alarm ranges for 30 knots and 5.5 knots.

1. Press **MENU**, **3** and **3** to display the **SPEED** display.

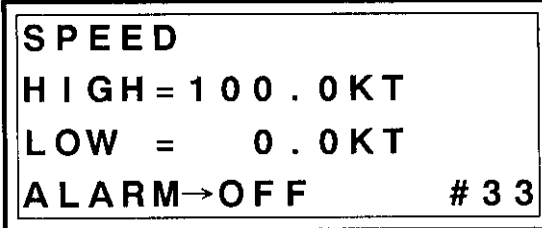

```
SPEED
HIGH = 100.0KT
LOW  =  0.0KT
ALARM→OFF      # 33
```

Figure 6-10 SPEED display


2. Press the **CLR** key.
3. Press **0**, **3** and **0** to enter 30 (knots).
4. Press the **ENT** key.
5. Press **0**, **0**, **5** and **5** to enter 5.5 (knots).
6. Press the **ENT** key.
7. Press the **Change** key to display **ON**.
8. Press the **ENT** key.

When the alarm setting is violated, the unit releases the audible alarm and displays "SPD."

Trip Alarm

The trip alarm sounds when the distance run exceeds the trip alarm setting. The procedure which follows shows how to set the trip alarm for 1234.5 nautical miles.

1. Press **MENU**, **3** and **4** to display the TRIP ALARM display.

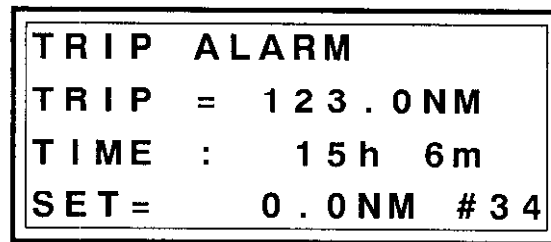


```
TRIP ALARM
TRIP = 123.0NM
TIME : 15h 6m
SET = 0.0NM #34
```

Figure 6-11 TRIP ALARM display

2. Press the **CLR** key.
3. Press the **CLR** key again.
4. Press the **ENT** key. All values are reset to zero and the cursor moves to the next line.
5. Enter trip alarm. In the example it is 1234.5 nautical miles. You would press

6. Press the **ENT** key.

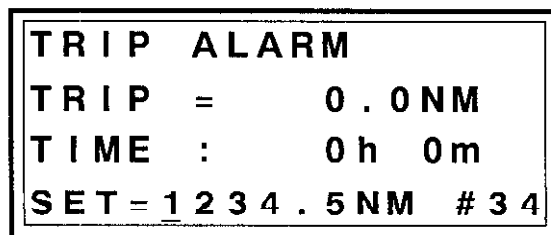

```
TRIP ALARM
TRIP = 0.0NM
TIME : 0h 0m
SET = 1234.5NM #34
```

Figure 6-12 TRIP ALARM display, showing values set in above procedure

When the alarm setting is exceeded, the unit releases the audible alarm and displays "TRIP."

MAINTENANCE & TROUBLESHOOTING

This chapter covers maintenance and troubleshooting procedures. Without regular maintenance, no machine can perform its intended function.

Whenever you suspect the unit is not functioning properly follow the troubleshooting table to try to restore normal operation. If you cannot restore normal operation, the problem may lie with a GPS satellite. In this case check satellite information for suitability.

Maintenance

Regular maintenance

Proper care and maintenance of this unit are important for good performance. A regular maintenance schedule should be established and should at least include the items tabulated in Table 7-1.

Table 7-1 Items to be inspected on regular basis

Item	Checkpoint
Antenna unit	<ul style="list-style-type: none">• Check for damage. Replace if damaged.• Wipe off ice droplets, snow, bird droppings, etc. to prevent reception problems.
Antenna cable	<ul style="list-style-type: none">• Check for external damage. Replace if damaged.• Confirm it is firmly connected to antenna unit and there is no water leakage.
Display unit cabinet, LCD and keyboard	<ul style="list-style-type: none">• Accumulated dust can be removed with a soft cloth. If necessary you may use a water-diluted mild detergent. DO NOT use chemical cleaners.
Power cable	<ul style="list-style-type: none">• Check for damage and tight connection.
Ground	<ul style="list-style-type: none">• Check for rust and tight connection. Clean or replace as necessary.

Replacement of fuse

The fuse in the power cable protects the unit from overcurrent and equipment fault. If the fuse blows, find out the cause before replacing it. Use only the rated fuse (one is supplied). Use of a wrong fuse will damage the equipment and void the warranty.

Troubleshooting for the User

The table which follows provides simple troubleshooting procedures which the user may follow to restore normal operation. If you cannot restore normal operation do not attempt to check inside the unit. There are no user-serviceable parts inside. Any repair work is best left to a qualified technician.

Table 7-2 Troubleshooting table

IF...	THEN...	Remedy
you cannot turn on the power	<ul style="list-style-type: none"> • check for loosened connector. • check that the ship's mains is on. • check for blown fuse. 	<ul style="list-style-type: none"> • Tighten connector. • Turn on ship's mains. • Replace fuse.
there is no position fix 10 minutes after turning on the power	<ul style="list-style-type: none"> • estimated position may be off by more than 10° from actual position; it takes more than 10 minutes to acquire a satellite in that condition. • almanac data may be more than one year old. 	<ul style="list-style-type: none"> • Go to menu #711 and enter estimated position • Go to menu #45 and execute cold start.
there is no position fixing whatsoever	<ul style="list-style-type: none"> • the antenna cable may be disconnected. • check for water leakage at antenna cable connector. • healthy satellite may have been deselected. • check receiver for frequency deviation. 	<ul style="list-style-type: none"> • Connect cable. • Replace if water damaged. • Display menu #43 to verify satellite selection. • Display menu #43. If deviation is more than ±3000 Hz, call for service.
position is wrong	<ul style="list-style-type: none"> • chart system selection may be wrong. • latitude and longitude correction values are not entered. • antenna unit height entered is wrong. 	<ul style="list-style-type: none"> • Go to menu #721 and check selection. • Go to menu #722 and enter them. • Go to menu #712 and check antenna unit height for correctness.
position-fixing availability shorter than other vessels	<ul style="list-style-type: none"> • DOP setting may be too low. (The factory setting is 20.) 	<ul style="list-style-type: none"> • Go to menu #712 and increase the DOP setting.

(Continued)

IF...	THEN...	Remedy									
menu cannot be displayed	<ul style="list-style-type: none"> • you may be in the single menu mode. 	<ul style="list-style-type: none"> • To restore full menu mode, press and hold down the MENU key while turning on the power. 									
data not output to external equipment	<ul style="list-style-type: none"> • wrong data I/O format selected. • data Tx interval is set for "0". • wrong setting on external equipment. • wrong connection on GP-50 MARK-2. 	<ul style="list-style-type: none"> • Select correct format referring to the Installation Manual. • Select correct setting referring to the Installation Manual. • Check setting on external equipment. • The correct connection is <table style="margin-left: 20px; border-collapse: collapse;"> <tr> <td style="padding-right: 10px;">GP-50 M2</td> <td style="padding-right: 10px;">Ext. Equip</td> <td></td> </tr> <tr> <td>TXD-H</td> <td>↔</td> <td>RXD-H</td> </tr> <tr> <td>TXD-C</td> <td>↔</td> <td>RXD-C</td> </tr> </table> 	GP-50 M2	Ext. Equip		TXD-H	↔	RXD-H	TXD-C	↔	RXD-C
GP-50 M2	Ext. Equip										
TXD-H	↔	RXD-H									
TXD-C	↔	RXD-C									
"SER" appears	<ul style="list-style-type: none"> • there is memory IC error. • Antenna unit or antenna cable may be faulty. 	<ul style="list-style-type: none"> • Do self test to confirm faulty board. (See next page.) Replace faulty board according to error readout. • Replace antenna unit or antenna cable when self test show "OK". 									
"BER" appears	<ul style="list-style-type: none"> • (internal) battery voltage is low. 	<ul style="list-style-type: none"> • Request replacement of battery. 									
"DER" appears	<ul style="list-style-type: none"> • Backup memory is corrupted. 	<ul style="list-style-type: none"> • Do self test to confirm faulty unit. (See next page.) Replace faulty unit (display or antenna) according to error readout. 									
"RER" appears	<ul style="list-style-type: none"> • GP-50 MARK-2 is not receiving correction data from the DGPS Beacon Receiver. 	<ul style="list-style-type: none"> • Confirm the specifications of the DGPS Beacon Receiver and select correct setting referring to page 5-17. 									

Checking Facilities

The GP-50 MARK-2 has several facilities which check it for proper operation, identify faulty devices, provide information or clear data. These facilities are mainly for use by service technicians, however the user may find them useful for identifying operation problems. The facilities are

- Self test
- Keyboard test
- Program no. display, and
- Data clear.

Self test

This test checks both the antenna unit and the display unit for proper operation. If the test results are satisfactory the GP-50 MARK-2 displays OK next to block name of the GPS NAV board. The test is continuously executed.

1. Press **MENU**, **7**, **3** and **2** to display the SELF TEST display.

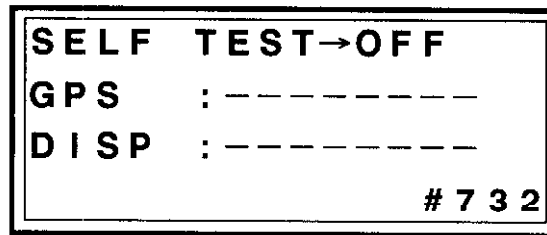


Figure 7-1 SELF TEST display

2. Press the **CLR** key.
3. Press the **Change** key to display ON.
4. Press the **ENT** key to start the self test.

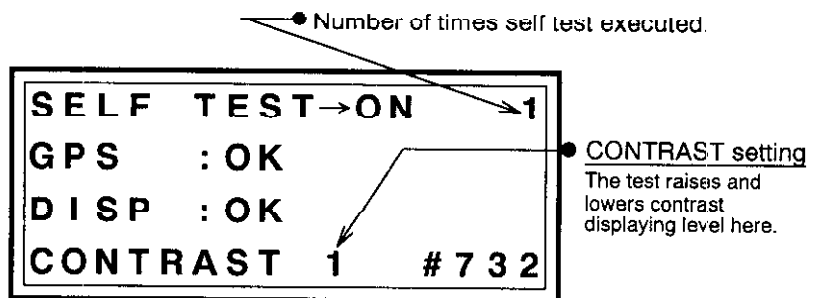


Figure 7-2 Self test results (normal)

5. Turn off the power to escape from the test.

Interpreting self test error display

The self test error display shows which parts on the GPS NAV board are faulty. For error, "1" appears in a column corresponding to offending device. The illustrations below show the device represented by each column.



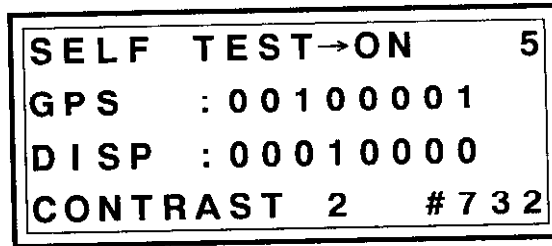


Figure 7-3 Self test results display, showing error for GPS NAV Board

• GPS Receiver block on GPS NAV Board

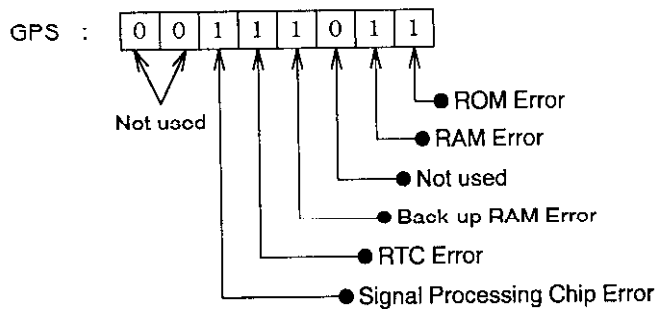

• NAV block on GPS NAV Board

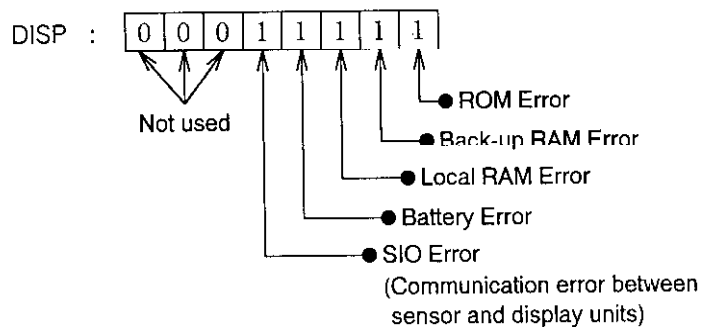

- ROM: Read Only Memory
- RAM: Random Access Memory
- RTC: Real-time Clock (clock integrated circuit)
- SIO: Serial I/O control

Keyboard/LCD test This test checks both each key and the LCD for proper operation.

1. Press **MENU**, **7**, and then press **3** twice to display the **KEY/LCD TEST** display.

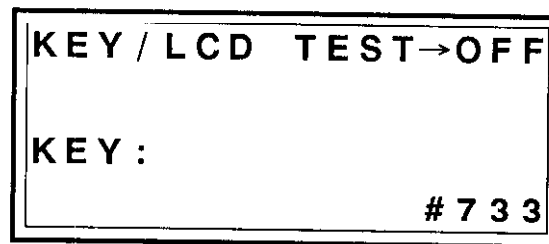


Figure 7-4 KEY/LCD TEST display

2. Press the **CLR** key.
3. Press the **Change** key to display ON.
4. Press the **ENT** key to start the self test.
5. Press each key one by one. The key name appears on the display if the key is functioning properly.
6. Press the **CLR** key twice. All LCD segments should light.
7. Press the **ESC** key to return to the default display.

Program no. display

This display shows the program version no. for both the sensor unit and the display unit.

Press **MENU**, **7**, **3** and **1** to display the **PROGRAM VERSION** display.

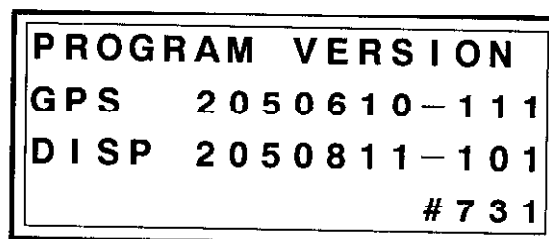


Figure 7-5 PROGRAM VERSION display

To escape, press the **ESC** key.

Clearing data

You will need to clear data in the following instances:

- when position fixing is not achieved and the self test indicates some error, or
- you want to delete all waypoints from the memory.

navigation data

The list which follows shows the items stored in the navigation data memory.

- temporarily stored positions
- waypoints
- routes
- alarm settings
- distance run setting
- single menu mode setting
- dimmer and contrast settings

1. Press **MENU**, **7**, **3** and **4** to display the MEMORY CLEAR display.

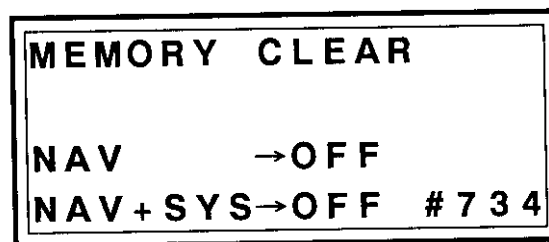


Figure 7-6 MEMORY CLEAR display

2. Press the **CLR** key. The cursor is under **OFF** on the NAV line.
3. Press the **Change** key to display **ON**.
4. Press the **ENT** key. The buzzer sounds to show it is clearing navigation data.

navigation data plus system data

This facility clears both navigation data and system data. System data includes

- estimated position, time and time difference
- settings of DOP, antenna unit height and elevation mask angle
- deselected satellites
- chart system setting, L/L correction values
- magnetic variation
- smoothing
- units of measurement for velocity, range and antenna unit height
- output port data selection, and
- NAV display setting.

1. Press **MENU, 7, 3** and **4** to display the MEMORY CLEAR display.
2. Press the **CLR** key. The cursor is under OFF on the NAV line.
3. Press the **ENT** key to move the cursor to the NAV+SYS line.
4. Press the **Change** key to display ON.
5. Press the **ENT** key. Then,
 - the buzzer sounds to show it is clearing navigation data,
 - factory settings are restored, and
 - cold start is executed.

Satellite Information

The SAT menu displays various information about the GPS satellites.

Signal level

This display shows the signal level of up to eight satellites. The display range is 0 to 999. A figure above 200 is considered normal. A figure less than 100 means malfunctioning satellite or satellite is in shadow sector.

1. Press **MENU** and **4** to display the SAT menu.

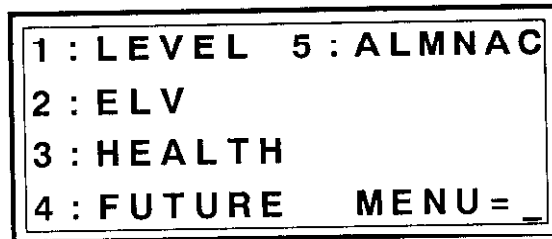


Figure 7-7 SAT menu

2. Press **1** to select LEVEL.

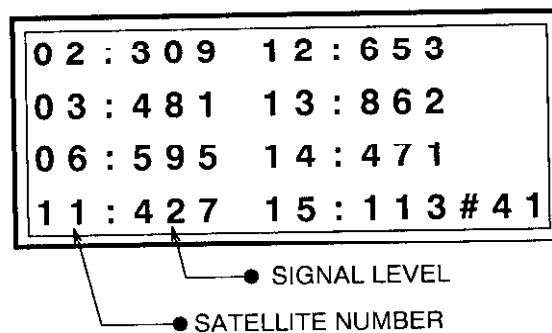


Figure 7-8 Satellite signal level display

DOP value and elevation angle

This display shows the DOP value and elevation angle of up to eight GPS satellites.

Press **MENU**, **4** and **2** to display the ELV display.

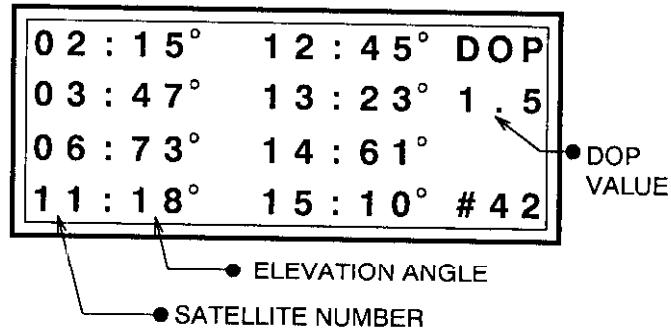


Figure 7-9 ELV display

The DOP alarm threshold is set to 20 at the factory. The DOP value on the ELV display changes with satellite movement. If the DOP is more than 20 the buzzer sounds and the indication “DOP” blinks on LCD. This is to alert you that position information is unreliable.

Deselecting satellites

When you hear of a malfunctioning GPS satellite deselect it on the HEALTH display.

1. Press **MENU**, **4** and **3** to call up the HEALTH display.


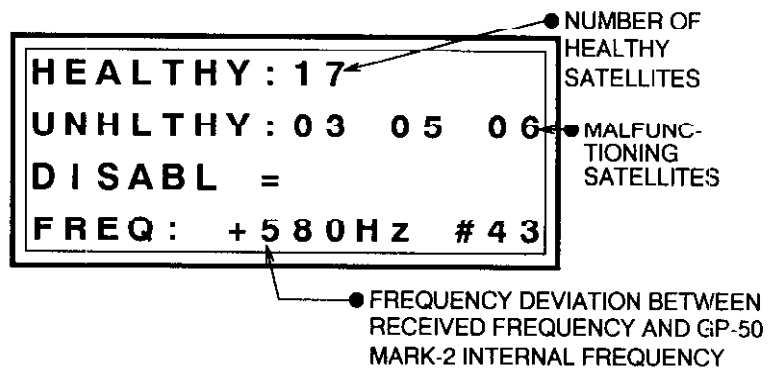


Figure 7-10 (Satellite) HEALTH display

2. Press the **CLR** key. The cursor blinks on the DISABL line. Any satellites previously deselected are restored.
3. Input satellite(s) you want to deselect. You can input up to three.
4. Press the **ENT**.

When position fixing is available round-the-clock the following display appears.

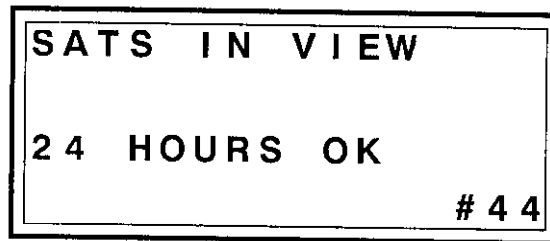

7-12 Display for round-the-clock position fixing availability

Almanac receiving time

You can view what time the almanac was received. If it is more than one year ago, execute cold start.

1. Press **MENU**, **4** and **5** to display the ALMANAC display.

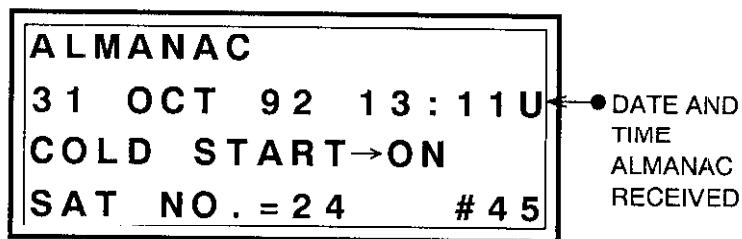


Figure 7-13 ALMANAC display

2. Confirm the date. If it is more than one year ago, proceed to step 3 to execute cold start.
3. Press the **CLR** key.
4. Press the **Change** key to display COLD START ON.
5. Press the **ENT** key.
6. To complete cold start quicker, input satellite (no.) which is in line-of-sight. (You could contact a nearby ship to find this information.)
7. Press the **ENT** key. It takes about 3 to 10 minutes to execute cold start.

■ **NOTE:** Estimated position should be within ten degrees. If more than ten degrees it may take more than 45 minutes to fix position.

Other information displayed on the HEALTH display

- **HEALTHY:** Number of healthy satellites.
- **UNHLTHY:** Unhealthy satellites. (These are satellites deselected by GPS; they are automatically deselected from use in position fixing.)
- **FREQ:** Receiver frequency deviation between received frequency and GP-50 MARK-2 internal frequency. If the figure is more than ± 3000 Hz call for the service.

Satellite schedule

This display shows the time range in which GPS position fixing is available.

Press **MENU**, and then press **4** twice to display the SATS IN VIEW display.

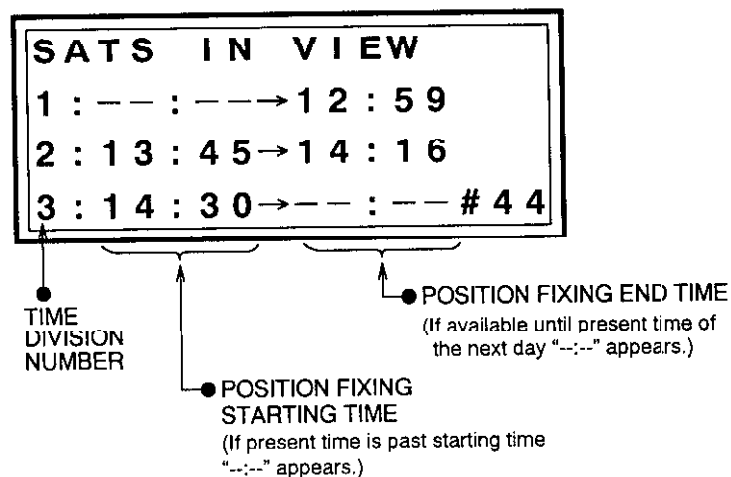


Figure 7-11 SATS IN VIEW display

Interpreting the SATS IN VIEW display

Using Figure 7-11 as an example, the following shows the meanings of the indications on the SATS IN VIEW display.

- The second line shows that from the present time to 12:59 position fixing is available.
- From 13:00 to 13:44 no position fixing is available.
- The third line shows that position fixing is available from 13:45 to 14:16.
- From 14:17 to 14:29 no position fixing is available.
- From 14:30 to present time of next day position fixing is available.

APPENDIX

Specifications

RECEIVER CHARACTERISTICS

Antenna	Flat type
Number of Channels	Eight channels
Tracking Capacity	Eight satellites
Tracking System	Parallel
Position Fixing Method	All-in-view
Positioning Accuracy	Bearing: 15m rms (DOP < 3, selective availability off) Velocity: 0.1kt rms (DOP < 3, selective availability off) <i>Positioning accuracy under control of the US Department of Defense.</i>
Tracking Velocity	200m/s (380kt)
Maximum Acceleration	1 G
Position Update Interval	Every second

PROCESSOR/DISPLAY CHARACTERISTICS


Display	16 characters × 4 lines (1 character: 5 × 7 dot character, on backlit LCD)
Display Character	Alphanumeric
Data Display	Latitude, longitude, present position, ship's speed, course, waypoint name (150 max.), route number, range to waypoint, bearing to waypoint, time-to-go to waypoint, cross track error, estimated time of arrival to waypoint
Alarm Functions	Arrival alarm, Anchor Watch alarm, Border alarm, Cross track error alarm, Ship's speed alarm, Trip (distance run) alarm
Data Output Format	CIF, NMEA0183 (Ver. 1.5), NMEA0180S
Power Supply & Power Consumption	10 to 35 VDC, 6W, or 110/220 VAC by optional rectifier

ENVIRONMENTAL CONDITIONS


Temperature	Antenna unit: -30 to +70°C, Display unit: -10 to 55°C
Humidity	95% at 40°C (both antenna and display units)
Watertightness	Conforms to IEC529 IPX6 (both antenna and display units)
Shock	1 to 12.5 Hz – 3.2mm pp, 12.5 to 25 Hz – 0.8mm pp 25 to 50 Hz – 0.2mm pp (both antenna and display units)
Mass	Antenna Unit: 0.3 kg, Display Unit: 0.7 kg

Menu Tree

The menu tree helps you find a desired menu number quickly. The numbers in the tree are the numeral keys you press to display a menu. For example, if you want to test the keyboard, the menu number is 733.

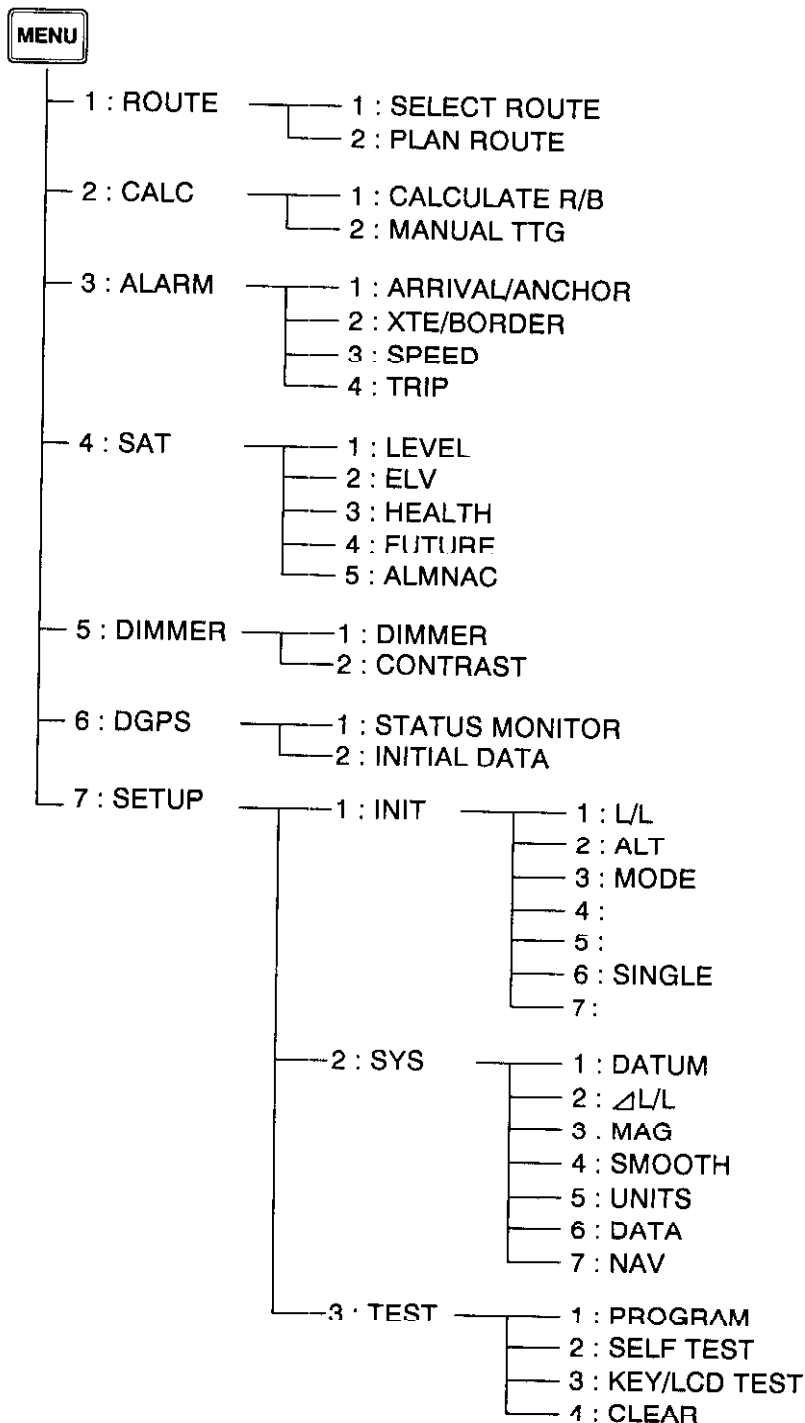

Time Differences

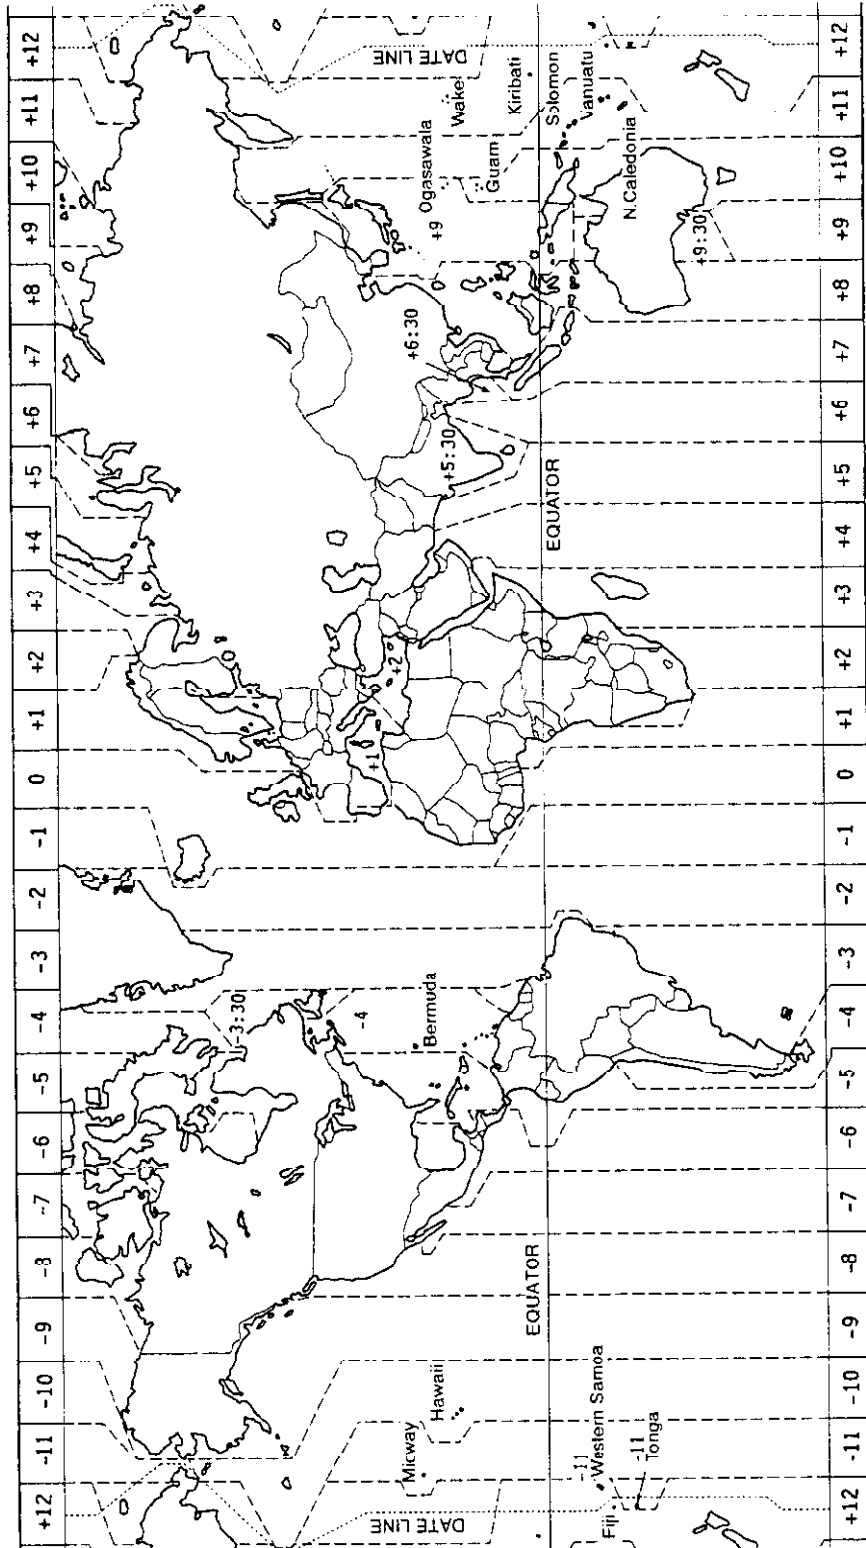

A

Abbreviations on display screen, 2-5

Alarms

- anchor watch alarm description, 6-1
- anchor watch alarm presetting, 6-4
- arrival alarm description, 6-1
- arrival alarm presetting, 6-3
- border alarm description, 6-2
- border alarm presetting, 6-6
- cross track error alarm description, 6-2
- cross track error alarm presetting, 6-5
- ship's speed alarm description, 6-2
- Ship's speed alarm presetting, 6-7
- trip alarm description, 6-2
- trip alarm presetting, 6-8

Almanac

- displaying receiving time, 7-12

Anchor watch alarm

- description, 6-1
- presetting, 6-4

Arrival alarm

- description, 6-1
- presetting, 6-3

Audible alarm silencing, 6-2

B

Border alarm

- description, 6-2
- presetting, 6-6

Brightness adjustment, 2-9

C

Calculating range and bearing between two points, 5-1

Calculating time-to-go between two waypoints, 5-2

Cancel

- destination waypoint, 3-8
- route navigation, 4-10

Chart

- entering correction value, 5-5
- selecting, 5-4

Clear

- all waypoints, (incl. navigation data), 7-7
- navigation data plus system data, 7-8
- wrong data, 2-7

Cold start

- description, 2-2
- manual, 7-12

Contrast adjustment, 2-9

Cross track error

- in route navigation, 4-10
- interpreting graphic display, 3-11
- to destination waypoint, 3-10

Cross track error alarm

- description, 6-2
- presetting, 6-5

D

Delete

- individual waypoint, 3-6
- point on a route, 4-6
- route, 4-7

Destination waypoint

- canceling, 3-8
- cross track error to, 3-10
- Estimated Time of Arrival (ETA), 3-12
- range and bearing to, 3-9
- selecting, 3-7
- Time-To-Go (TTG), 3-12
- Velocity To Destination (VTD), 3-12

Differential GPS Mode, 5-17

Display

- DOP value and elevation angle, 7-10
- program version no., 1-6
- range and bearing to destination waypoint, 3-9
- satellite schedule, 7-11
- satellite signal level, 7-9
- saved (present) position, 2-15
- waypoint list, 3-5

Display screen

- abbreviations, 2-5
- adjustment of brightness, 2-9
- adjustment of contrast, 2-10
- symbols, 2-5

Distance run, 5-3

Dual functions keys, 2-7

E

Elevation mask (angle), 5-16

Enter

- automatic magnetic variation, 5-6
- chart correction value, 5-5
- data, 2-7
- estimated position, 2-11
- manual magnetic variation, 5-7
- antenna unit height, 2-13
- time difference, 2-13

Estimated Time of Arrival (ETA) to destination waypoint, 3-12

F

Fuse replacement, 7-1

G

Geodetic datum, 5-4

GPS

accuracy, 1-2
description, 1-1

K

Keyboard, 2-6

dual function keys, 2-7
response conventions, 2-7
testing, 7-5

L

LCD test, 7-5

M

Magnetic variation

automatic, 5-6
manual, 5-7

Maintenance

cleaning and checking, 7-1
replacing fuse, 7-1

Memory

clearing navigation data, 7-7
clearing navigation data plus system data, 7-8

Menu, 2-8

MENU key, 2-8

MOB (Man OverBoard) key, 2-14

N

NAV displays

description, 5-9
presetting, 5-11

P

Position fixing mode, 5-16

Present position

saving as waypoint, 3-3
entering estimated, 2-11
saving, 2-15

Program version no. display, 7-6

R

R/B key, 3-9, 4-8

Range and bearing calculation between two points, 5-1

Range and bearing to destination waypoint, 3-9

Range and bearing to intermediate point on a route, 4-8

RECALL key, 2-16, 3-4

Recalling saved (present) position, 2-16

Route navigation

canceling, 4-10
cross track error, 4-10
deleting a point on a route, 4-6
deleting route contents, 4-7
following a route, 4-8
range and bearing to intermediate point, 4-9
registering a route, 4-1
replacing a point on a route, 4-7
restoring a temporarily deselected point to a route, 4-6
temporarily deselecting a point on a route, 4-5

S

Satellite

deselecting, 7-10
displaying almanac receiving time, 7-12
displaying DOP value and elevation angle, 7-10
displaying schedule, 7-11
displaying signal level, 7-10

SAVE key, 2-15

Saving present position, 2-15

Saving present position as waypoint, 3-3

Saving stored position as waypoint, 3-4

Self test, 7-4

Antenna unit height

changing unit of measurement, 5-8
entering, 2-13

Ship's speed alarm

description, 6-2
presetting, 6-7

Single menu mode, 5-14

Smoothing

description, 5-12
presetting, 5-13

Symbols on display screen, 2-5

T

Time difference entry, 2-13

Time-To-Go (TTG)

calculation of between two waypoints, 5-2
to destination waypoint, 3-12

Trip alarm

description, 6-2
presetting, 6-8

Troubleshooting

deselecting satellites, 7-10

INDEX

- display satellite signal level, 7-9
- displaying almanac receiving time, 7-12
- displaying DOP value and elevation angle, 7-10
- displaying program version no., 7-6
- keyboard/LCD test, 7-5
- self test, 7-4
- troubleshooting table, 7-2
- Typographic conventions, 2-1

U

- Unit of measurement (changing unit for speed, range, and sensor unit height), 5-8

V

- Velocity To Destination (VTD) waypoint, 3-12

W

- Warm start, 2-2

Waypoint

- canceling destination waypoint, 3-8
- clearing all, 7-7
- deleting individual, 3-6
- entry by latitude and longitude, 3-1
- entry by present position, 3-4
- entry by previously saved position, 3-4
- selecting destination waypoint, 3-7

- Waypoint List, 3-5

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>